



Input Voltage Range (VDD): 1.9V to 3.6V
I2C Input Voltage Max: VDD

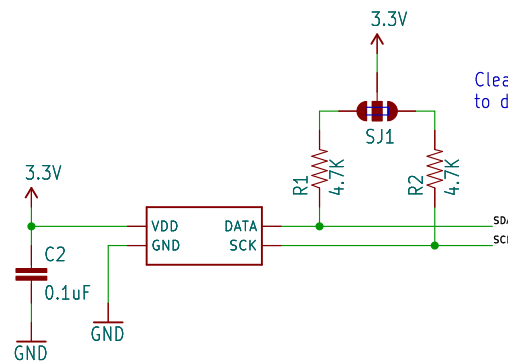

Clear both sides of SJ1
to disable I2C pullup resistors

7-bit I2C Address is 0x40
I2C write is 0x80
I2C read is 0x81



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: J. Bartlett

REV:
v10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1