



Mic capsule and preamplifier

Default gain = 100 (40 dB)
Populate R17 to lower gain.
10K = 10 (20 dB)
Remove R3 and populate R17 to raise gain.
1Meg = 1000 (60 dB)

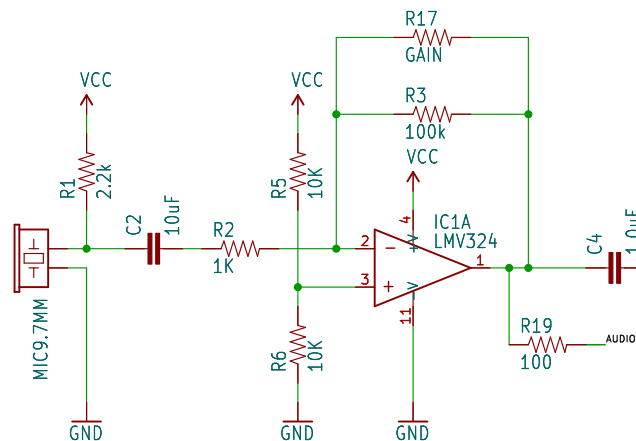


Peak detector

Half-wave precision rectifier with gain of approx 2

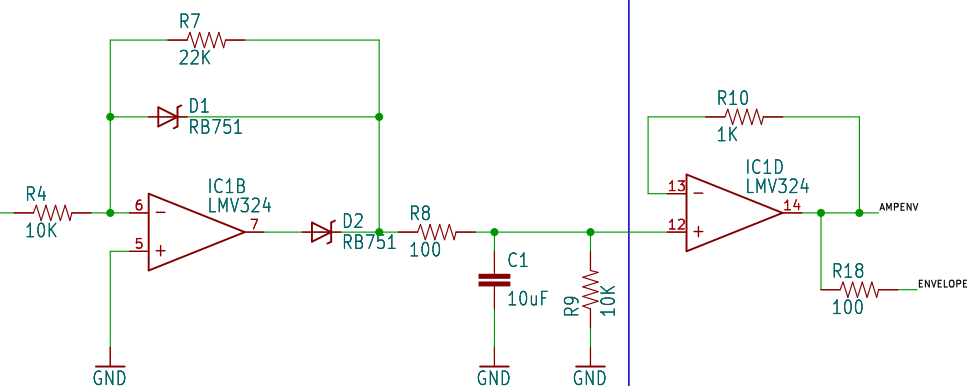


Buffer amplifier

I/O connector




Vcc range between 2.7V and 5.5V.

Decoupling



Supply decoupling – place near U1

Schmitt trigger

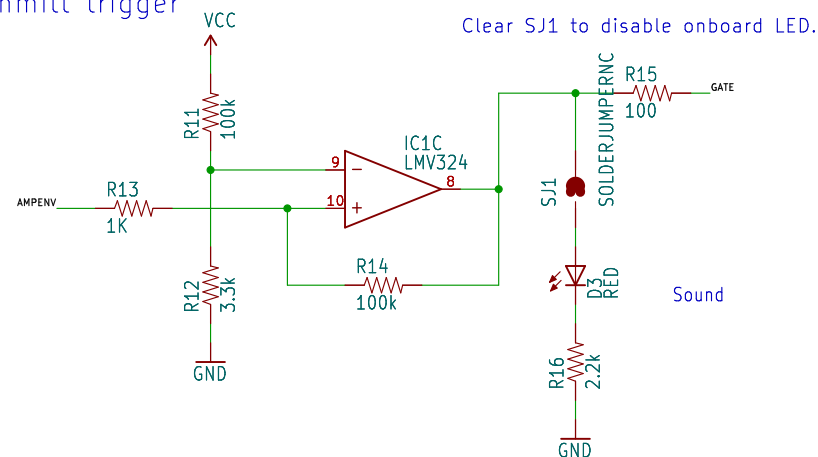

Clear SJ1 to disable onboard LED.

Released under the Creative Commons
Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0>

8 SFE SFE

TITLE: \${PROJECTNAME}

Design by: Byron Jacquot

REV:
V11

Sheet: /
File: /
Title:

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1

