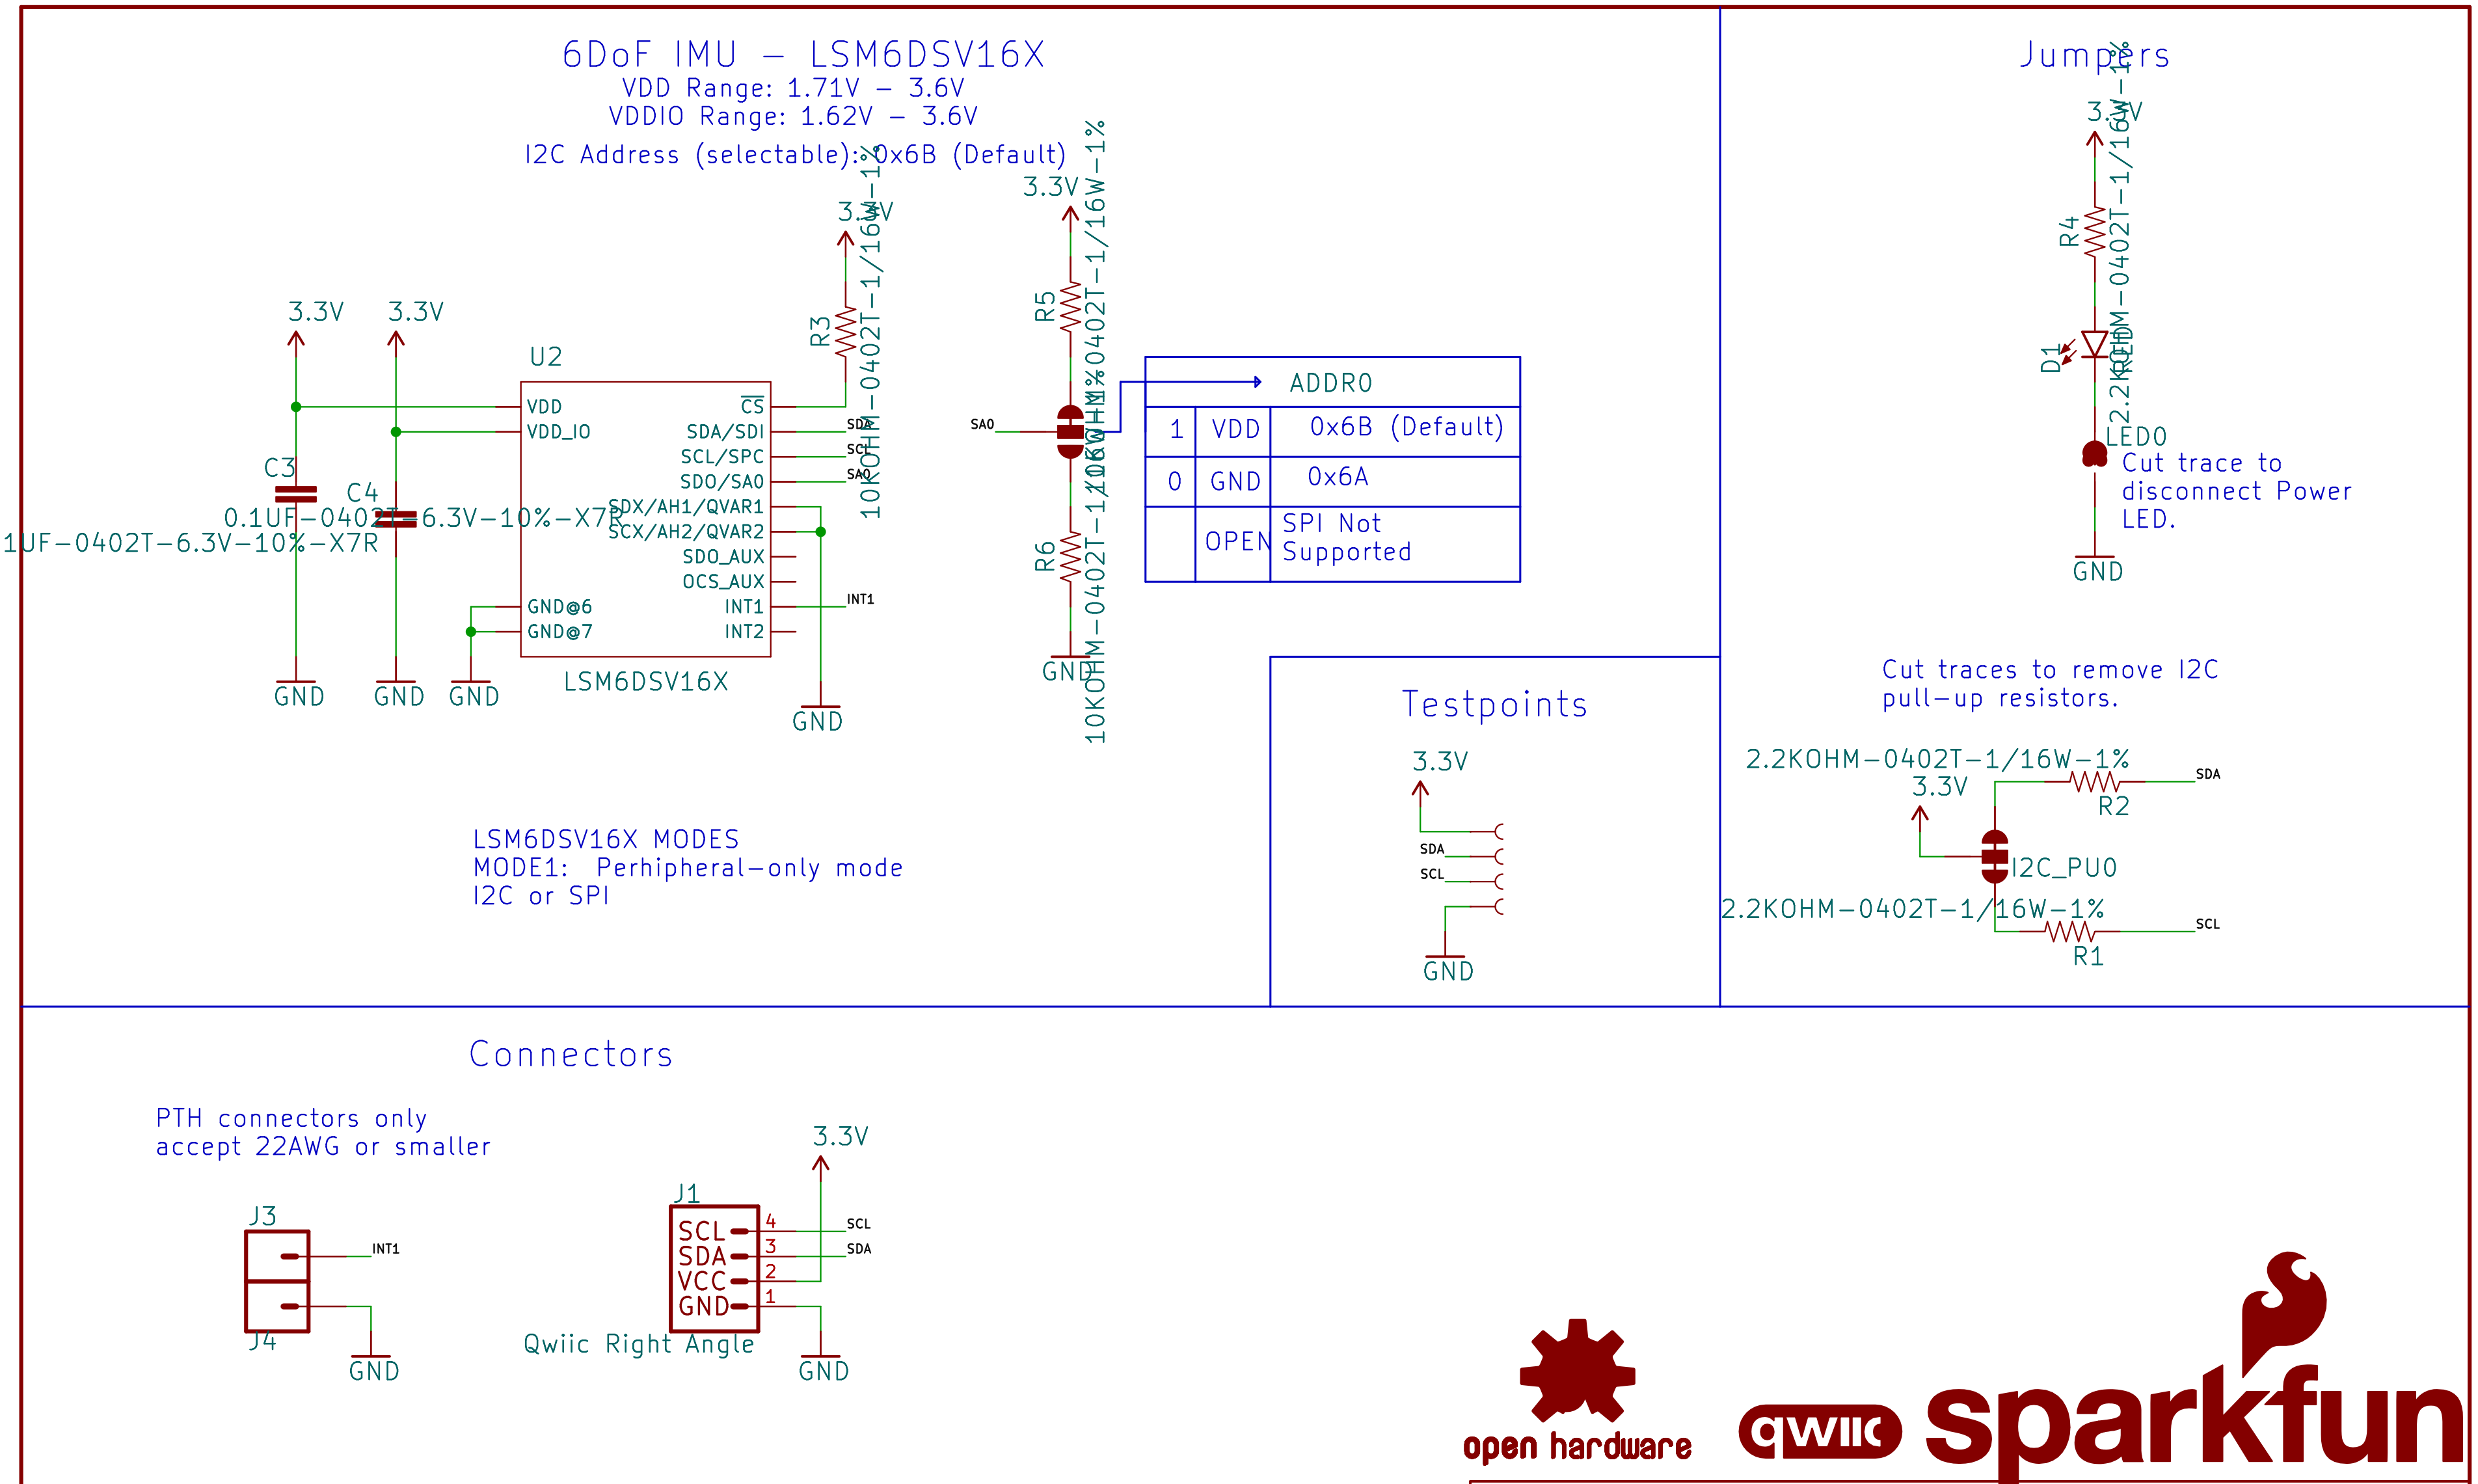

6DoF IMU - LSM6DSV16X

VDD Range: 1.71V - 3.6V
VDDIO Range: 1.62V - 3.6V

I2C Address (selectable): 0x6B (Default)

ADDR0		
1	VDD	0x6B (Default)
0	GND	0x6A
	OPEN	SPI Not Supported

LSM6DSV16X MODES
MODE1: Perhipheral-only mode
I2C or SPI

Jumpers

Cut trace to disconnect Power LED.

Cut traces to remove I2C pull-up resistors.

Testpoints

Connectors

PTH connectors only accept 22AWG or smaller

Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/

TITLE: ${PROJECTNAME}
Design by: Elias Santistevan ${DESIGNER}
REV: v10 ${REV}
Sheet: /
File: working.kicad_sch
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
Title:
Size: User
Date:
Rev:
KiCad E.D.A. eeschema 7.0.6
Id: 1/1