
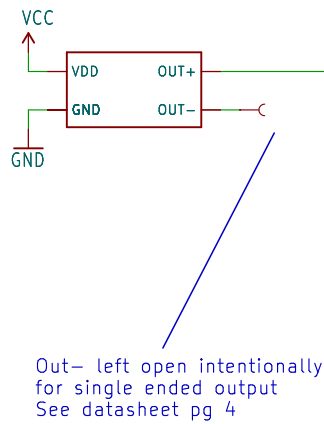



MEMS Microphone

VCC RANGE:
2.3–3.6V

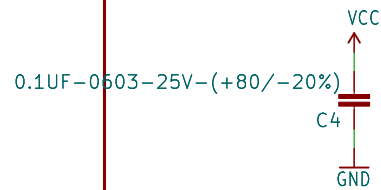

Gainstage

GAIN: *64
Frequency Response: 7.2Hz–19.7KHz
Bias: $1/2 \cdot VCC$

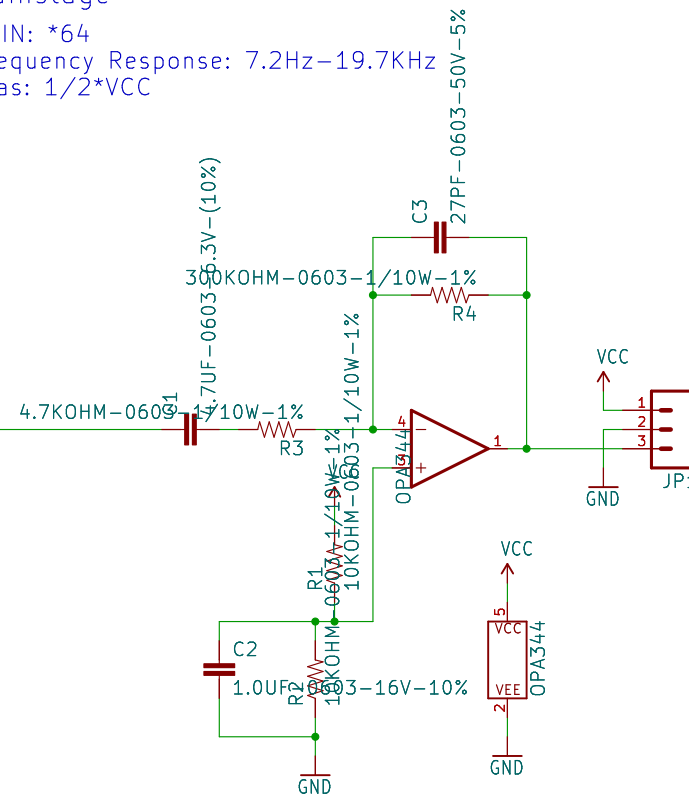

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: \${DESIGNER}

Based on a MEMs mic design by Pete Dokter

Date: \${CURRENT_DATE}

REV: 1.0
\${REV}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1