




AS3935 Lightning Detector

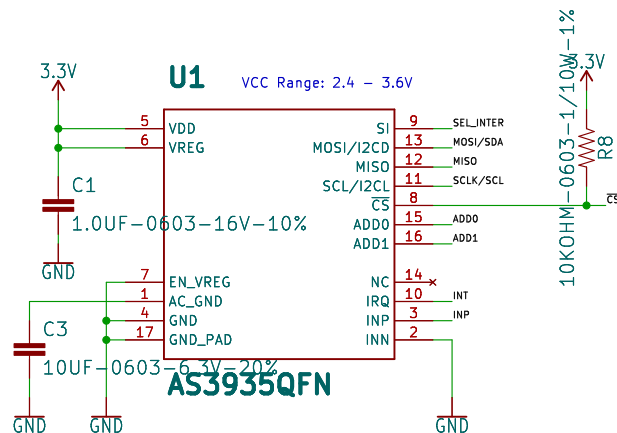


500 kHz Resonance Antenna



Header





Jumpers

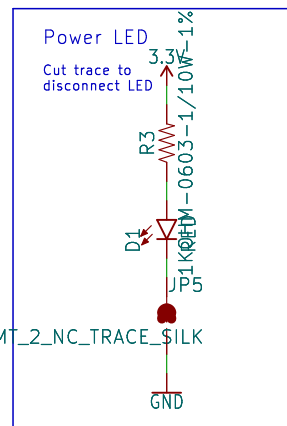

JUMPER-SMT_2_NC_TRACE_SILK


I2C Pull Up Resistors

R2 pullup resistor should be closed if using a single device or more, in I2C mode.
R1 should only be closed when there are three or more devices on the I2C bus




Address Jumpers

Close jumpers to change I2C Address

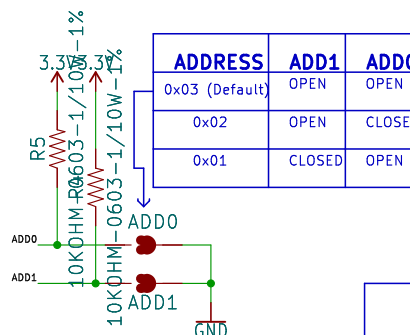

ADDRESS	ADD1	ADD0
0x03 (Default)	OPEN	OPEN
0x02	OPEN	CLOSED
0x01	CLOSED	OPEN

JUMPER-SMT_3_1-NC_TRACE_SILK

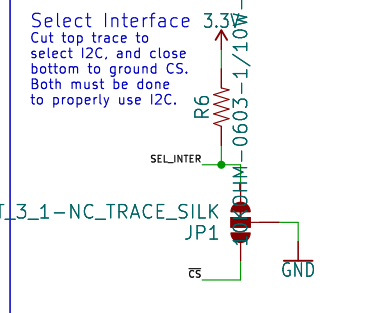

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: \${DESIGNER}
Elias Santistevan

REV: v2.0
\${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1