



Audio Codec


Supply Voltage Ranges
VIN: 3.7-5.5V*
DCVDD: 1.7-3.6V
DBVDD: 1.7-3.6V
AVDD: 2.7-3.6V
SPKVDD: 2.7-5.5V
* If VIN is used for SPKVDD, then VIN should be limited to 5.5V by SPKVDD max range

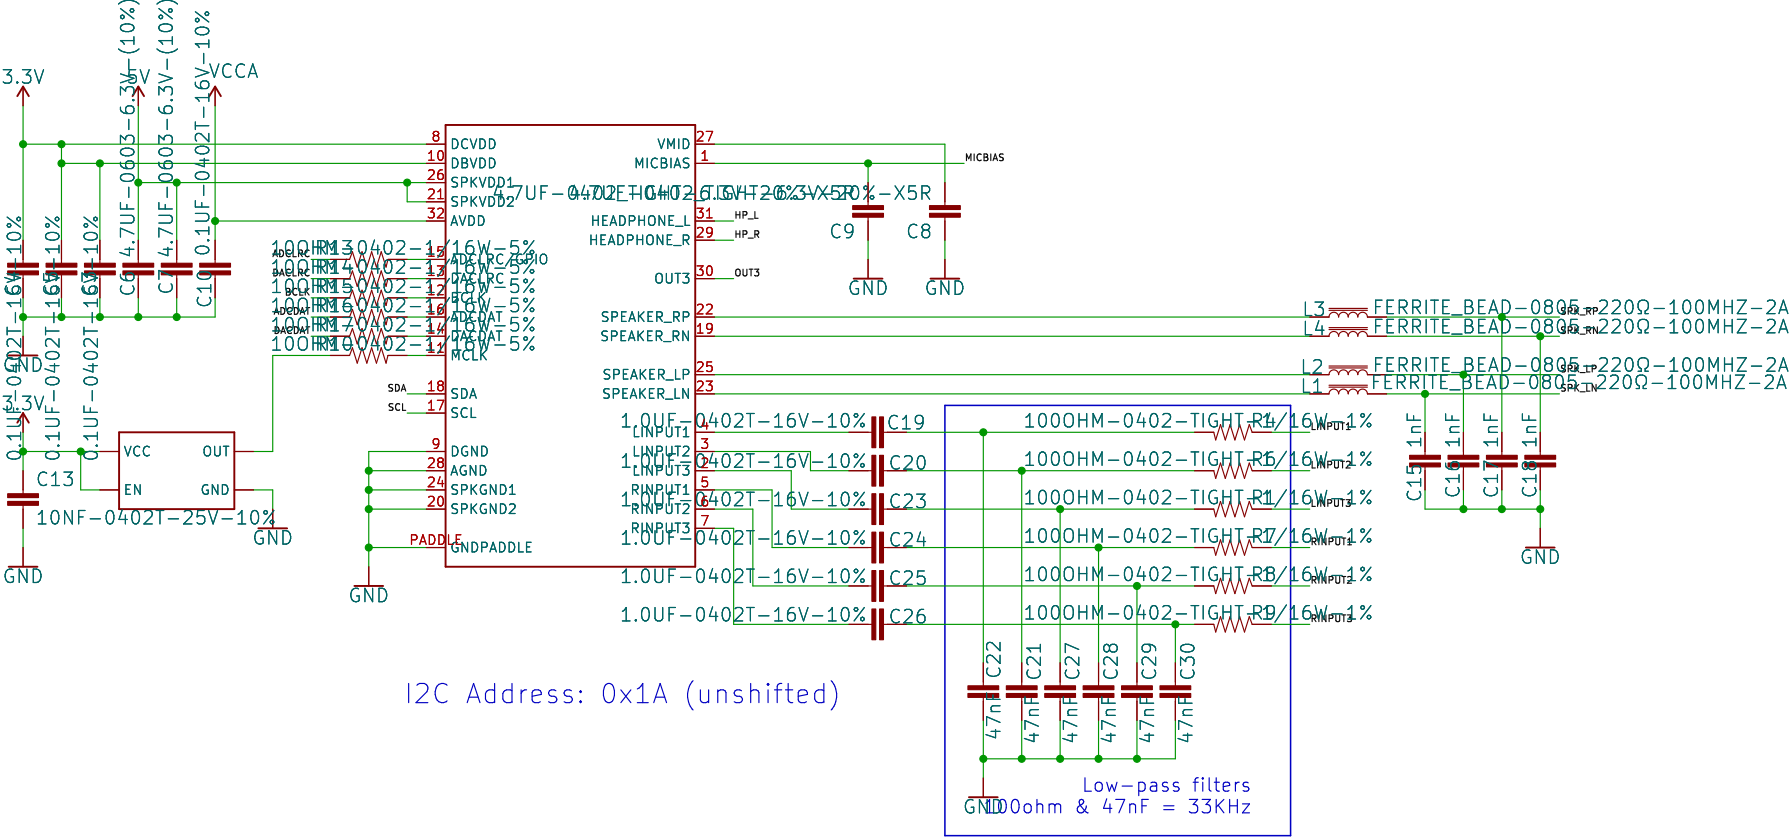


AVDD VREG

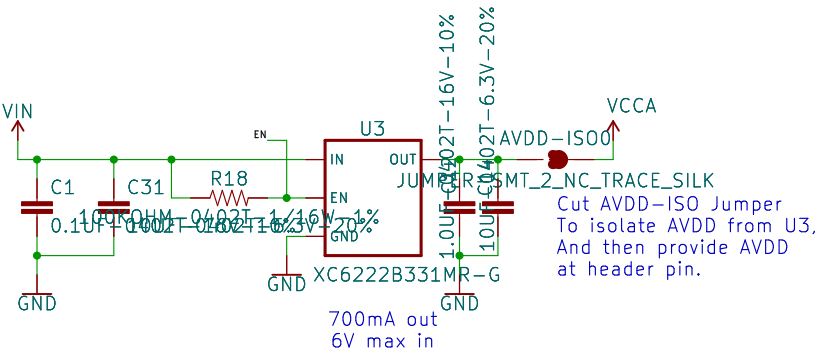


Speaker VDD Source Selection Jumper

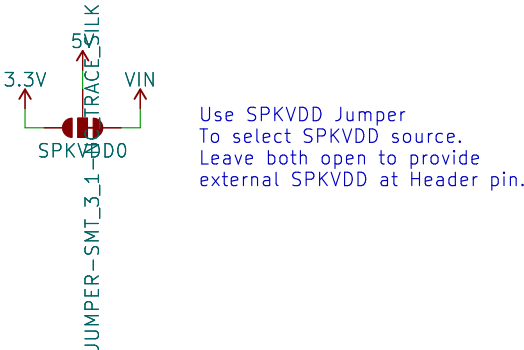


Headers

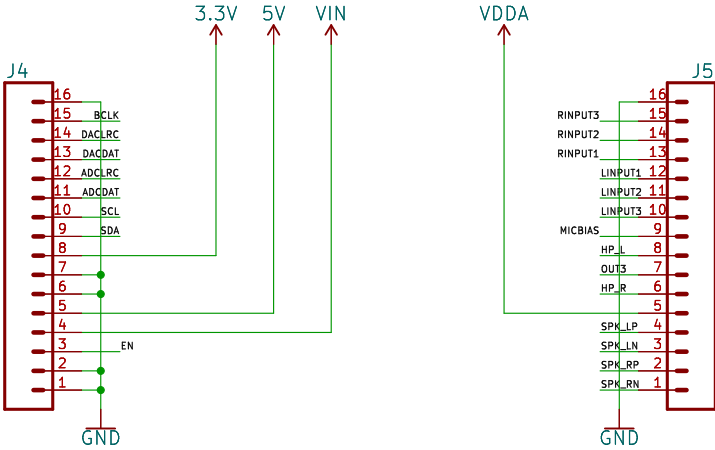

Power LED

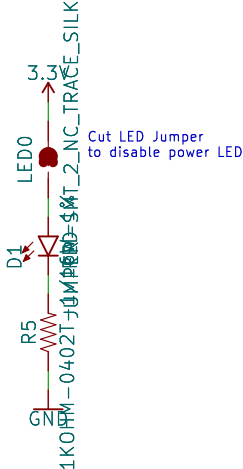

Qwiic

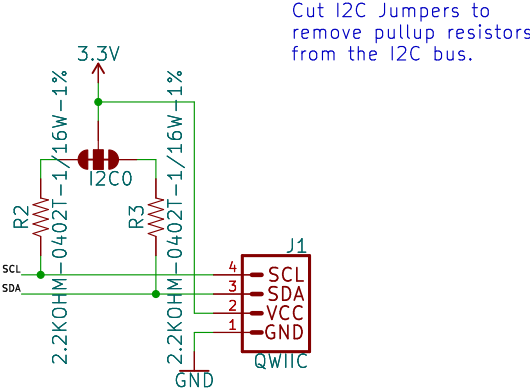

Special Instructions

Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/	
TITLE: \${PROJECTNAME}	
Design by: Pe\${DESIGNER}	REV: \${REV}
Based on the Top PHAT by Andy England	
Date: \${CURRENT_DATE}	Sheet: \${#}/\${##}
Size: User Date: Rev:	
KiCad E.D.A. eeschema 7.0.6 Id: 1/1	