

BME280 Breakout

MODES:

I2C:

Leave the copper-connected jumpers SJ1-SJ2 as default, use SJ3 to set the I2C address.


SPI 4-WIRE:

Jumpers SJ1-SJ3 can be opened to remove 4.7k load on the SPI lines but is not necessary.

SPI 3-WIRE:

SJ3 must be opened.


SJ3 controls the lowest bit of the I2C address--can be: 0x1110110 0x1110111 Open for SPI 3-wire mode

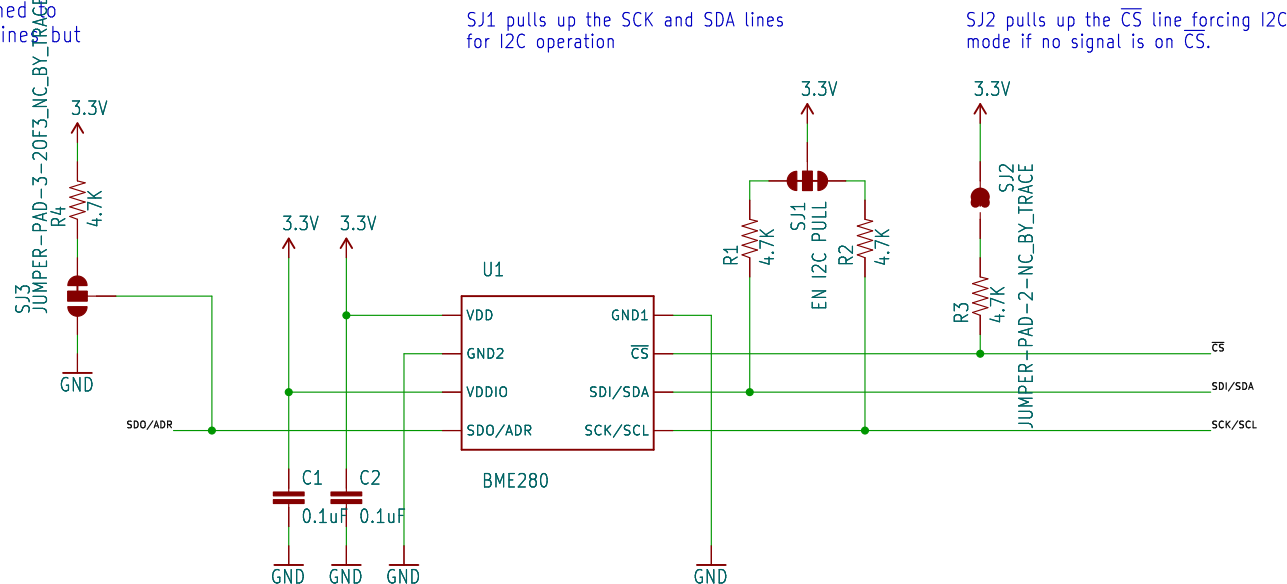


Ports:

(Use only 1)

I2C



SPI



open hardware

Released under the Creative Commons

Attribution Share-Alike 4.0 License

<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: Marshall Taylor

REV:

V10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User

Date:

KiCad E.D.A. eeschema 7.0.6

Rev:

Id: 1/1