



Clock Generator – 5P49V60

Decoupling Caps

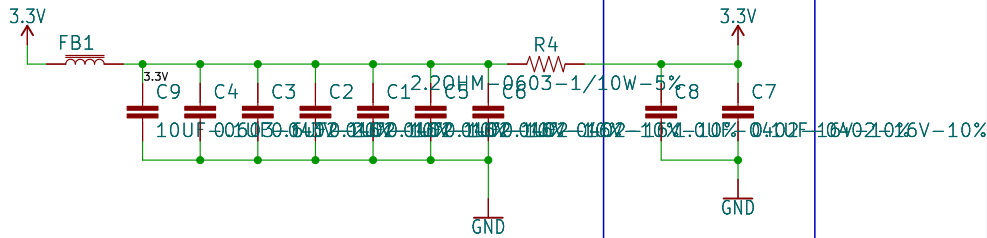

VCC Range: 1.71 – 3.465V


Coplanar Transmission Calculation:
14mil trace width w/ 5mil isolate
on all clock output = 61 Ohm Impedance

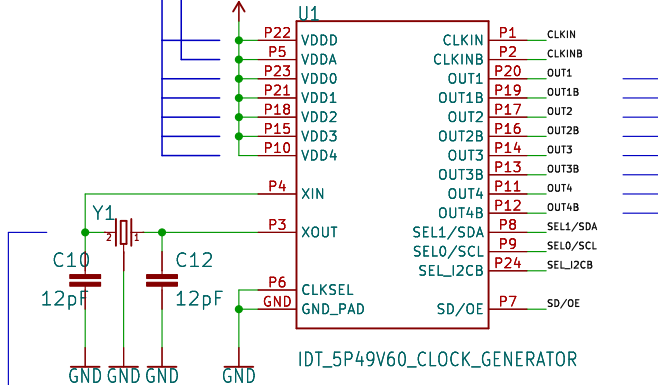


Default Unshifted 7 bit Address: 0x6A
Alternate Address: 0x6B

2* (8pF Load Capacitance – 2 stray Capacitance) = 12pF


Jumpers

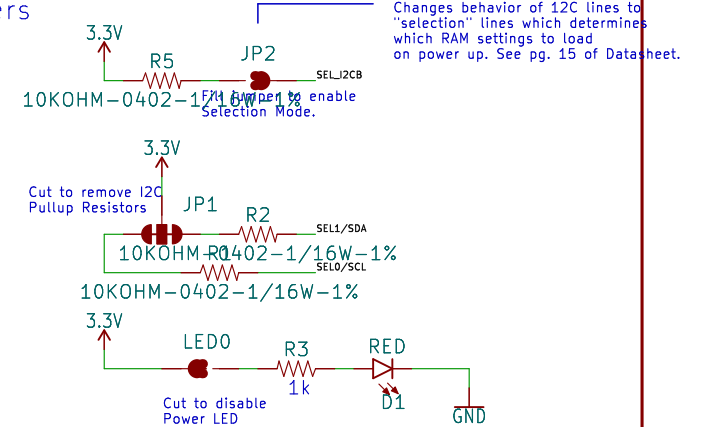

Headers

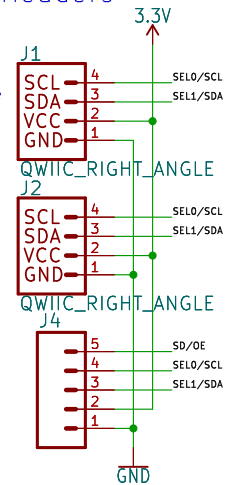

Clock Headers



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: Eli Seidman

REV: 1.0

Date: 2014-01-01

Sheet: 1/1

Size: User Date: KiCad E.D.A. eeschema 7.0.6

Rev: Id: 1/1