



ATECC508A – CryptoAuthentication IC

VCC RANGE: 2.0V to 5.5V
IO LEVELS: 1.8V to 5.5V

Cut this jumper to
disable power LED







DEFAULT I2C ADDRESS: 0x60
(software definable)

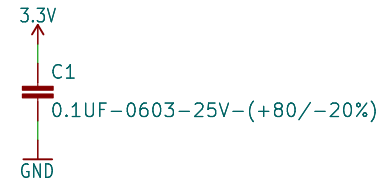

Connectors and I2C Pullups

This jumper connects
SDA and SCL
to 4.7k pull-up
resistors.

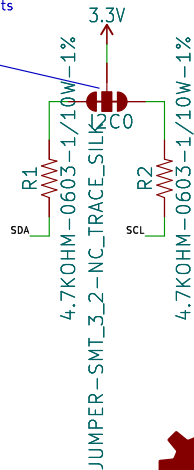

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: Pete \${DESIGNER}

REV:
\${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1