



PCA9615 IC

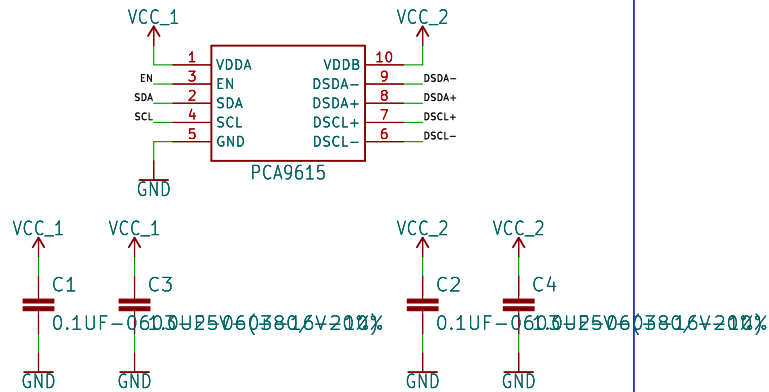

VDD_A = I2C-bus side power supply (2.3 V to 5.5 V)
VDD_B = differential side power supply (3.0 V to 5.5 V)

VDDA-to-VDDB Jumper




Qwiic Connectors



Headers




Differential I2C Termination Resistors

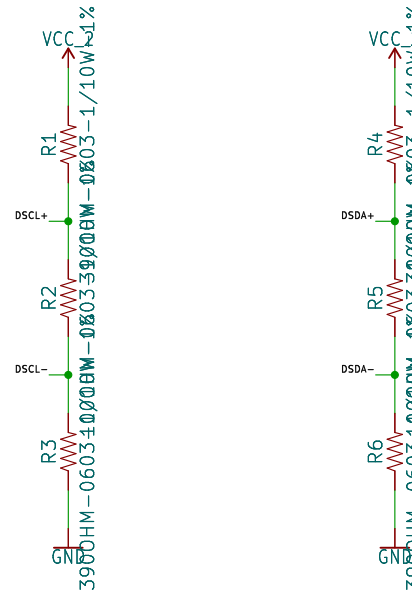


Populate termination resistors ONLY on the first and last peripheral on a I2C Bus.

I2C Pullups

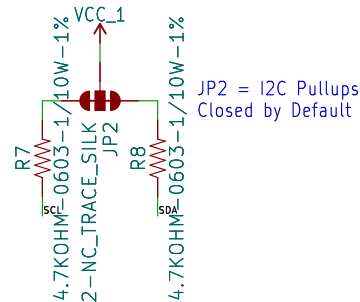

RJ-45 Connector

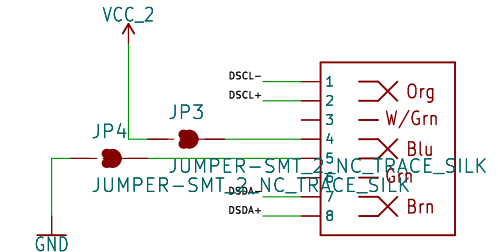

Cut traces on JP3 & JP4 to disconnect
VDD_B and GND from cable.



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Joel Bartlett

REV:
v10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1