



ADIN1110 BASE10-T1L ETHERNET MAC-PHY

VDD Ranges
3.13V - 3.46V [2.4V p-p or 1.0V p-p transmit level]
1.71V - 3.46V [1.0V p-p transmit level]

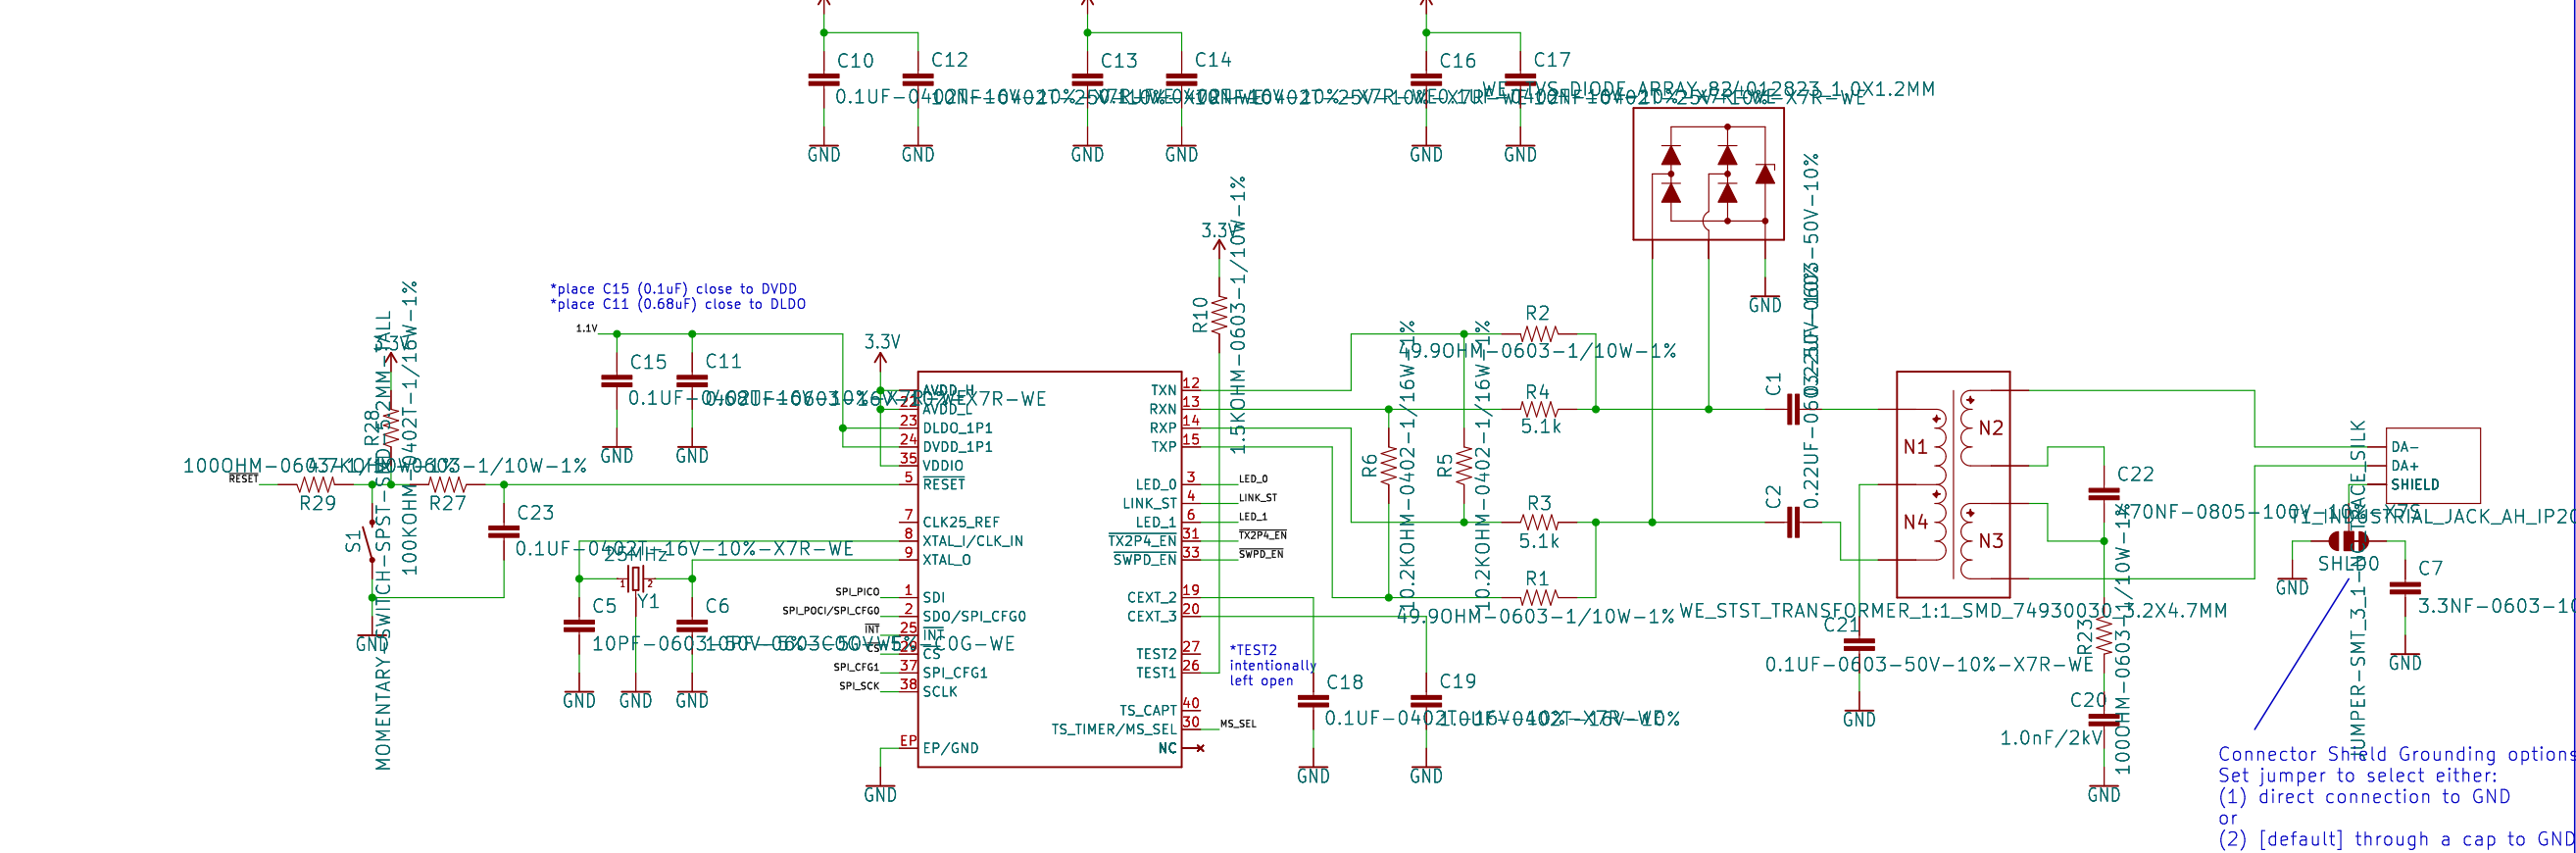


Configuration Pins/Jumpers

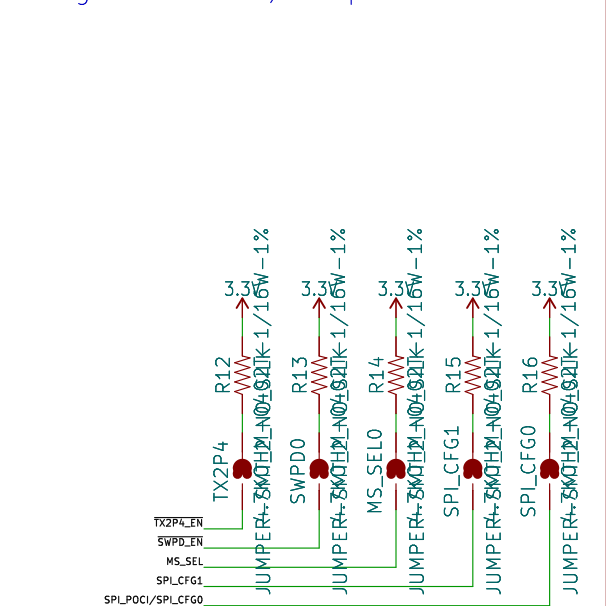


*All hardware config pins default low with internal pull down resistors. See datasheet page 16 for all available options.


MicroMod Function Connector

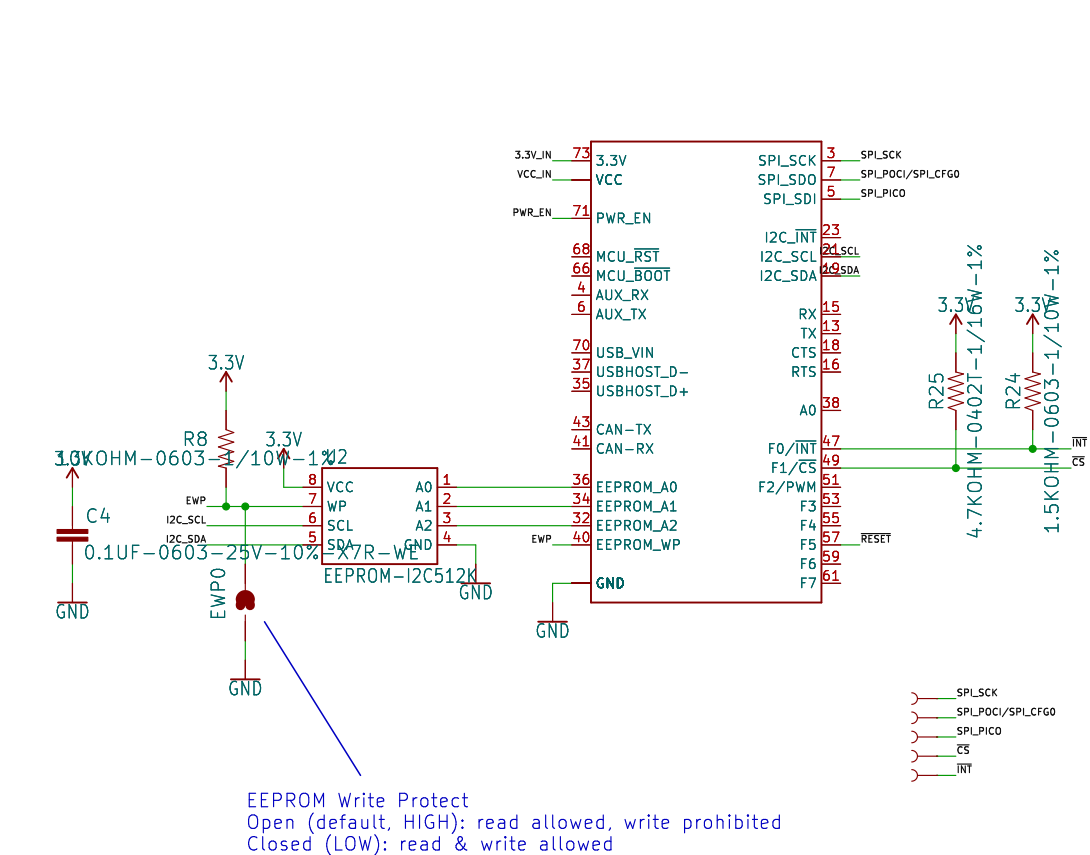

STATUS LEDs

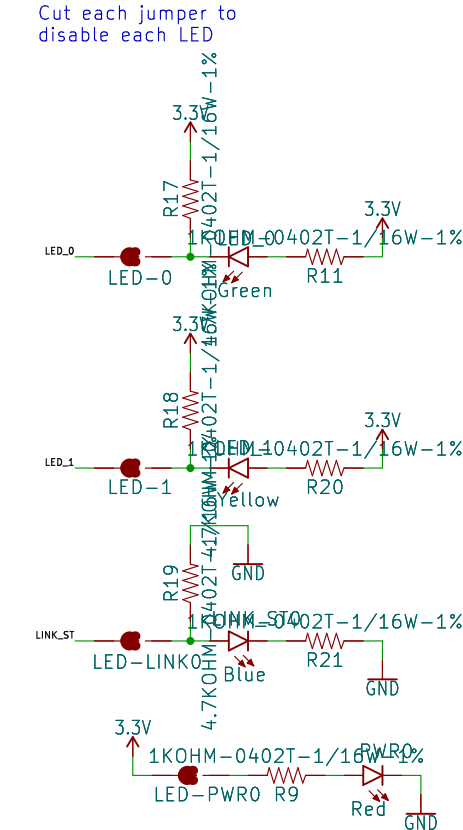

Power Enable

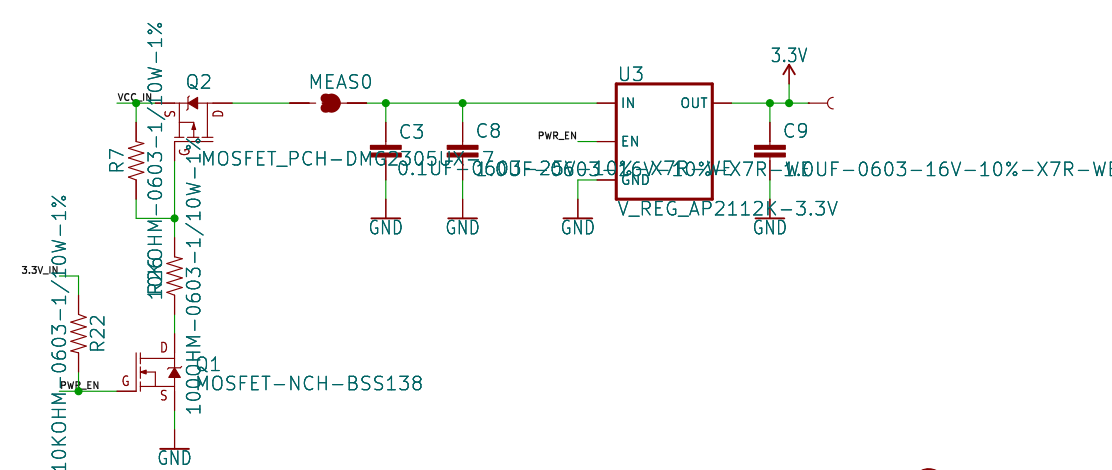

Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/				
				Special Instructions
TITLE: \${PROJECTNAME}				
Design by: <u>Pete Seidel</u> Based on a MM Ethernet board by N. Seidle				REV: <u>1</u>
Date: <u>2017-07-20</u>				REV: <u>1</u>
Sheet: /				REV: <u>1</u>
File: <u>Work\PCB\PCB1.kicad_pcb</u>				
Title: <u>PCB1</u>			Sheet: <u>1</u> / <u>1</u>	
Size: User			Rev:	
KiCad E.D.A. eeschema 7.0.6			Id: 1/1	