



Voltage Regulation

Input Voltage: 3.3V (Qwiic)

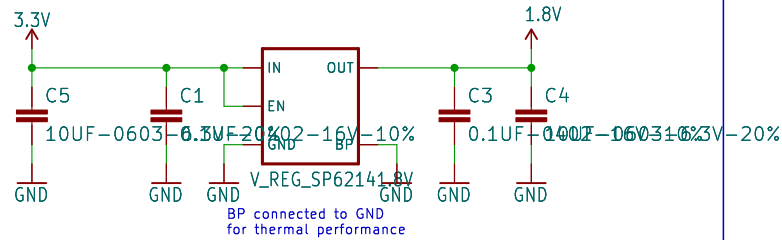


Logic Conversion

Clear Jumper to remove I2C Pull-ups from bus

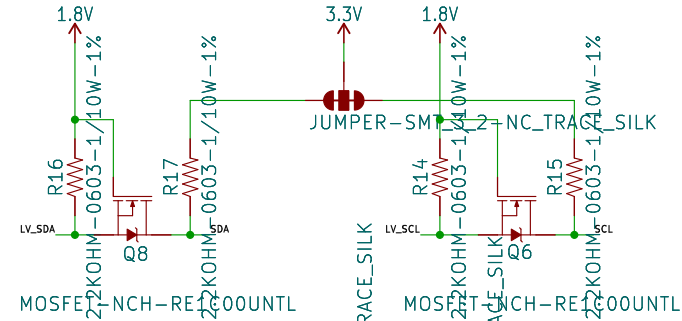


DC-DC Converter

Acceptable input voltage: 2.4–4.75 (3.3V via Qwiic)

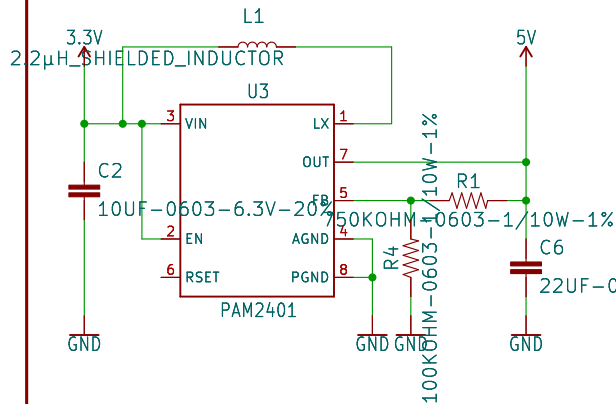


Sensor

Typical current consumption: 600–1100 uA
VCC Range: 1.7 – 2.0V
VCC RED and IR LED: 3.1–5.0V
VCC GREEN LED: 4.5 – 5.5V

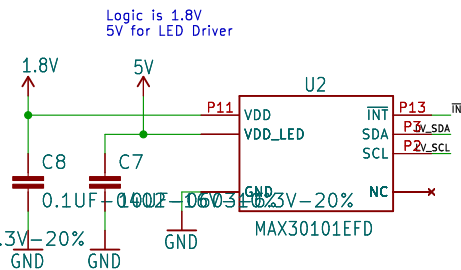

7-Bit I2C: 0x57

I2C Connections

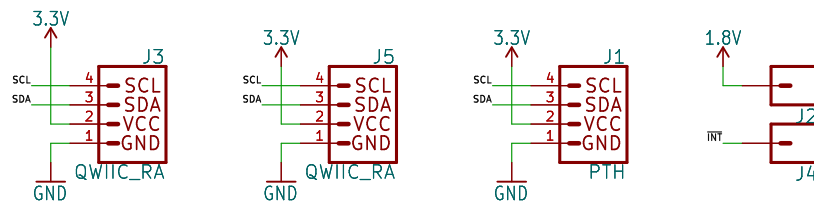

sparkfun



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		⊗ ⊗ ○ ○
TITLE: \${PROJECTNAME}		⊗ ⊗ ○ ○
Design by: \${DESIGNER}		REV: \${REV}
Based on a design for the MAX30105 by N. Seidle		
Date: \${CURRENT_DATE}	Sheet: \${#}/\${##}	
Size: User Date: KiCad E.D.A. eeschema 7.0.6		Rev: Id: 1/1