


MAX30101 Pulse Oximeter and Heart Rate Sensor

VCC Range: 1.7 – 2.0V

VCC RED and IR LED: 3.1–5.0V

VCC GREEN LED: 4.5 – 5.5V


Unshifted 7-bit Address: 0x57

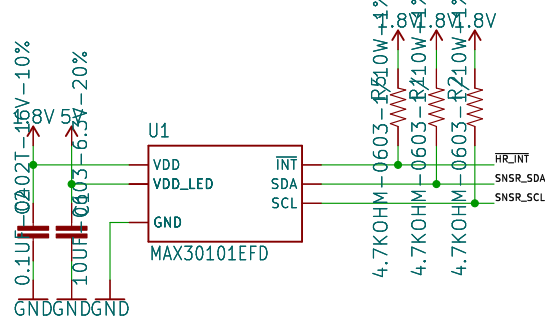

MAX32644 Biometric HUB

VCC Range: 1.71 – 3.63V


Unshifted 7-bit Address: 0x55

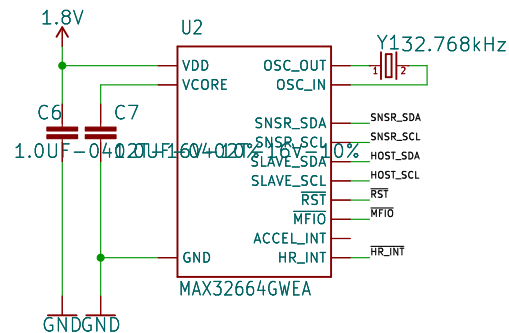

1.8V VREG – SP6214


VCC Range: 2.5 – 7V

IOUT MAX: 100mA

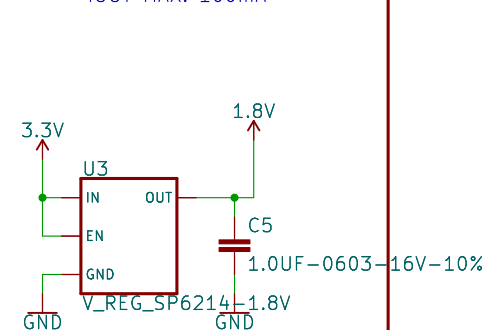


DC-DC Converter – PAM2401

VCC Range: 1–4.75V

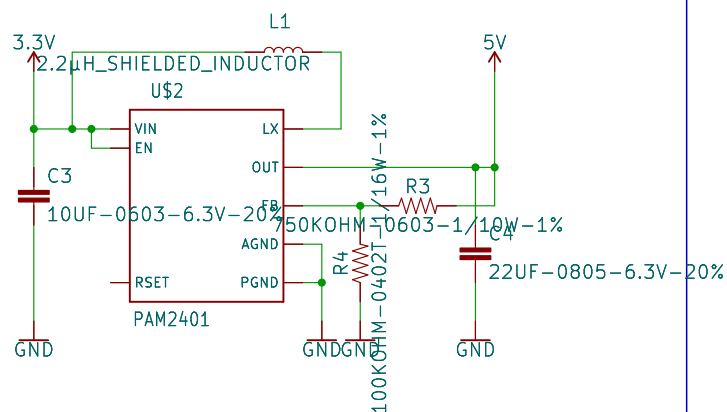


Connectors

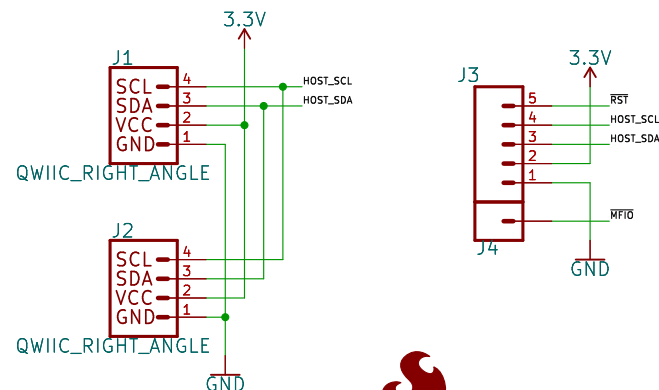

I2C Pullup Resistors

Cut jumpers to remove I2C Pullups.



sparkfun

open hardware

QWIIC

Released under the Creative Commons

Attribution Share-Alike 4.0 License

<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: \${DESIGNER}

Special Instructions

REV: \${REV}

Sheet: /

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Title:

Size: User

Date:

KiCad E.D.A. eeschema 7.0.6

Rev:

Id: 1/1