



Accelerometer – ISM330DHCX

VDD Range: 1.71V – 3.6V
VDDIO Range: 1.62V – 3.6V
I2C Address (selectable): 0x6B (Default)

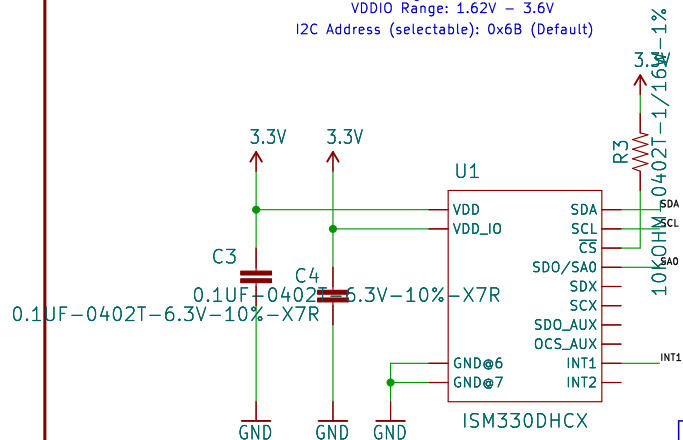


ISM330DHCX MODES
MODE1: Peripheral-only mode
I2C or SPI

Testpoints




Jumpers

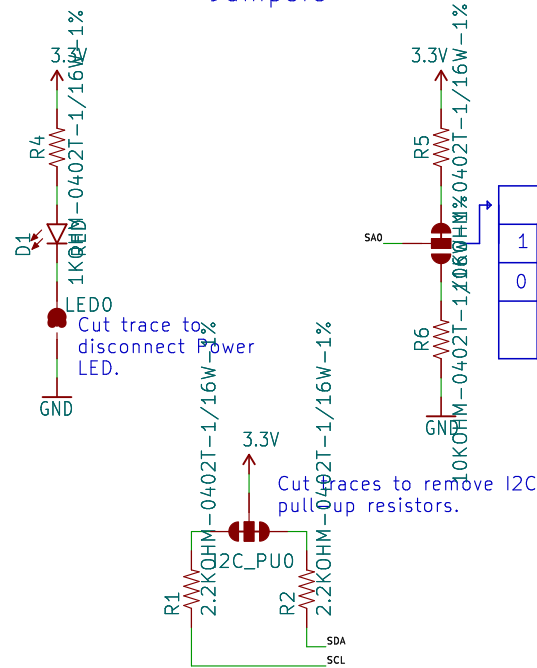

Connectors

PTH connectors only
accept 22AWG or smaller

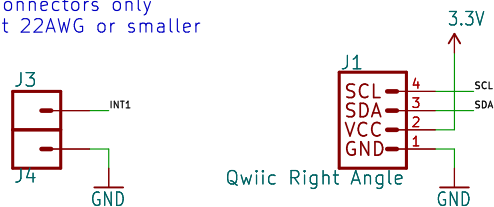

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Eyal Sivan

REV: 1.0
\${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1