Accelerometer – LSM6DSO

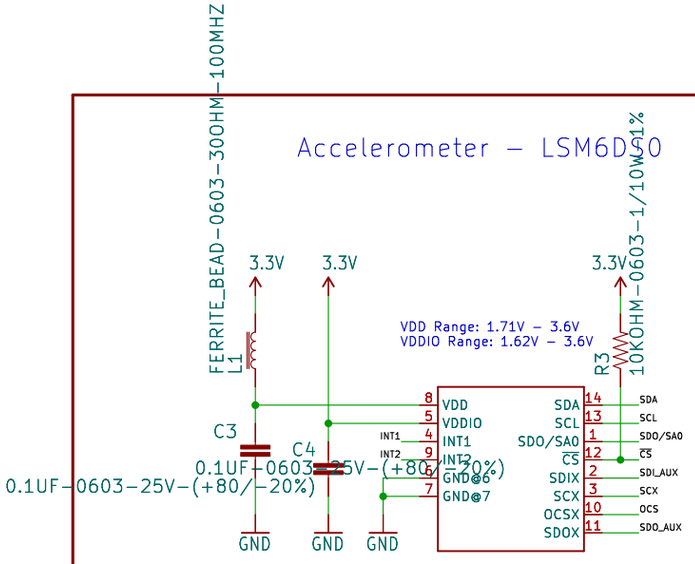

SERIAL MODES
MODE1: Perhipheral-only mode
I2C or SPI
MODE2: Sensor Hub mode
I2C or SPI with controller I2C port
MODE3: AUX SPI mode
I2C and SPI access (Multi-read)

Jumpers

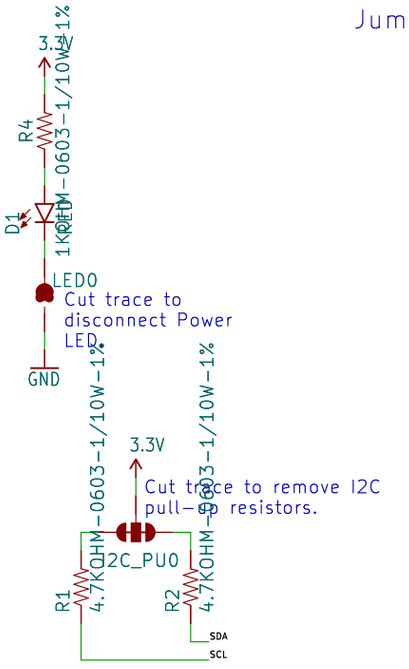

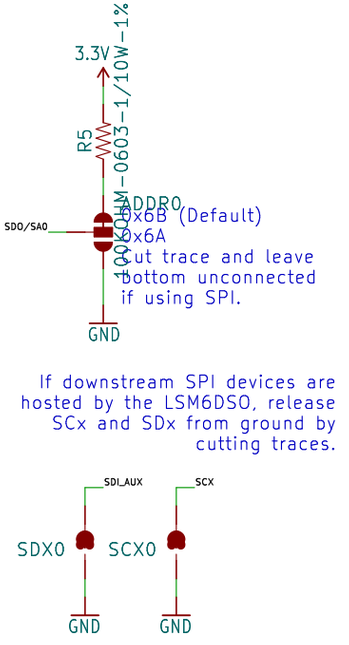

Connectors

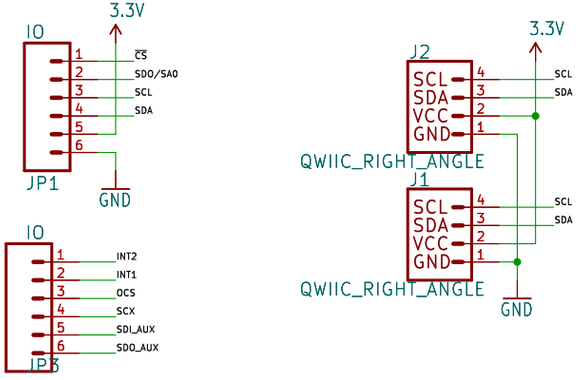

open hardware

qwiic sparkfun

Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/

TITLE: ${PROJECTNAME}	
Design by: ${DESIGNER} Revised by: Elias Santistevan	REV: ${REV} V10
Date: ${CURRENT_DATE}	Sheet: ${#}/${##}

Sheet: /
File: [illegible].kicad_sch
Title:

Size: User	Date:	Rev:
KiCad E.D.A. eeschema 7.0.6		Id: 1/1