



Accelerometer – ISM330DHCX

VDD Range: 1.71V – 3.6V
VDDIO Range: 1.62V – 3.6V
I2C Address (selectable): 0x6B (Default)

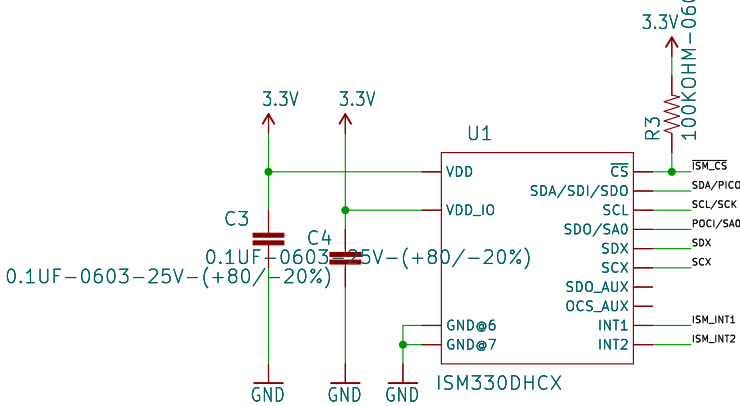

ISM330DHCX MODES
MODE1: Peripheral-only mode
I2C or SPI
MODE2: Sensor Hub mode
I2C or SPI with controller I2C port

Accelerometer Address Selection and Sensor Hub Jumpers

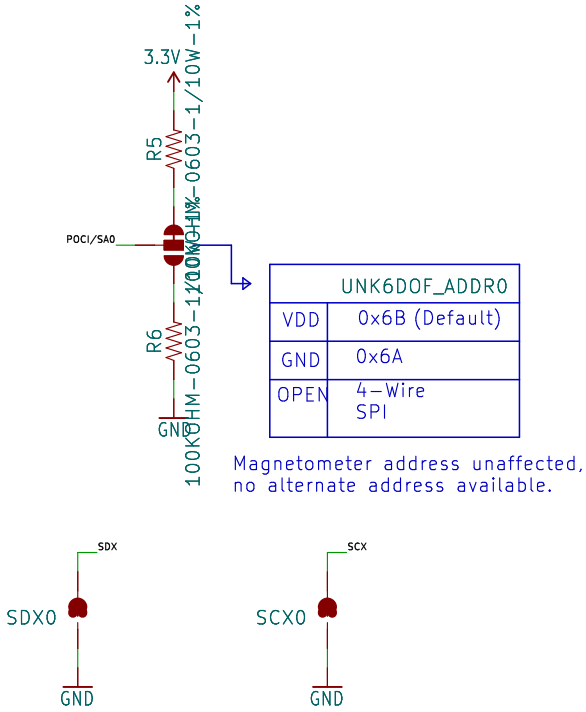


Magnetometer address unaffected, no alternate address available.


If using Mode 2 (Sensor Hub Mode), cut both traces.

Magnetometer – MMC5983MA


VDD Range: 2.8V – 3.6V
VDDIO Range: 2.8V – 3.6V
I2C address: 0x30

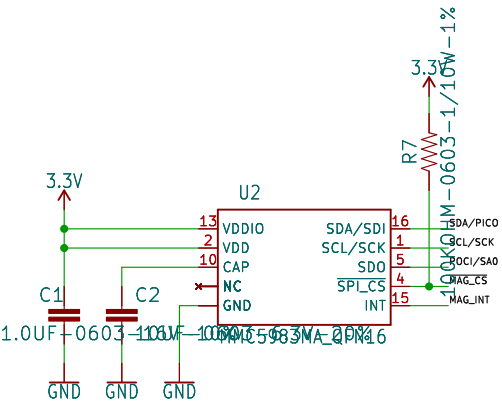

Connectors

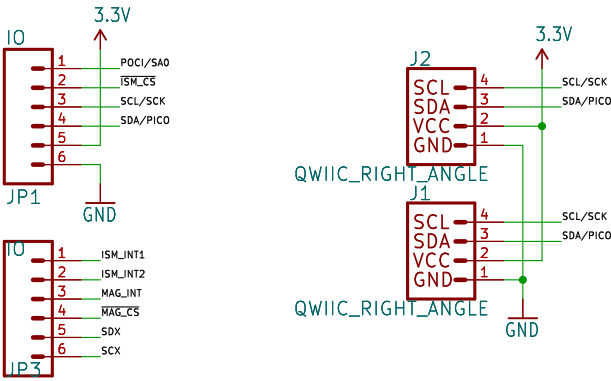

I2C and LED Jumpers

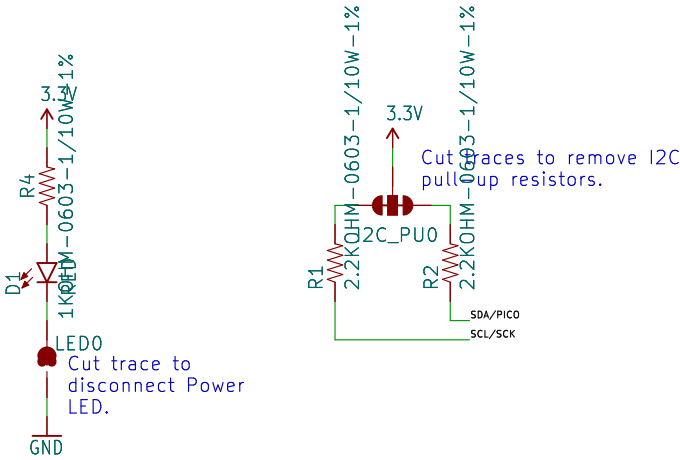

Cut trace to disconnect Power LED.

Cut traces to remove I2C pull-up resistors.



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		○○○○ ⊗⊗⊗⊗
TITLE: \${PROJECTNAME}		
Design by: EESIGNER	REV: \${REV}	
Date: \${CURRENT_DATE}	Sheet: \${#}/\${##}	
Size: User	Date:	Rev:
KiCad E.D.A. eeschema 7.0.6		Id: 1/1