



Accelerometer – BMA400

Voltage Range
VDD: 1.72V – 3.6V
VDDIO: 1.2V – 3.6V

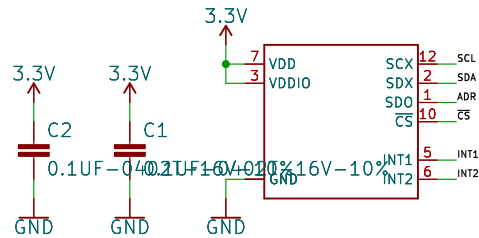


I2C Pullups

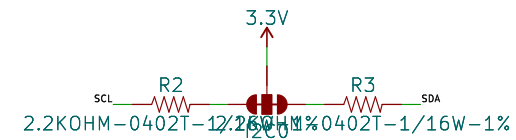

Cut traces to disconnect I2C pullup resistors


I2C Address Selection

I2C Address	
3V3	0x15
GND	0x14 (Default)
Open	SPI

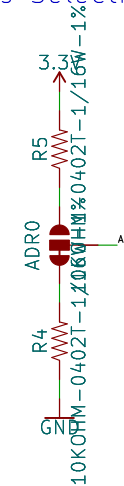

Connectors

PTH connectors only
accept 22AWG or smaller

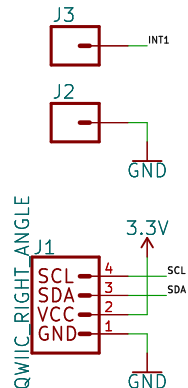

Power LED



Cut trace to
disconnect
power LED

CS Pullup



Test Points



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: \${DESIGNER}

REV:
\${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1