



Barometer – LPS28DFW

Voltage Input Range:
1.7V – 3.6V




I2C Pullups

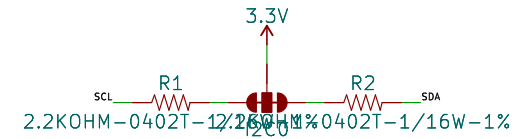

Cut traces to disconnect I2C pullup resistors


I2C Address Selection

I2C Address	
3V3	0x5D
GND	0x5C (Default)

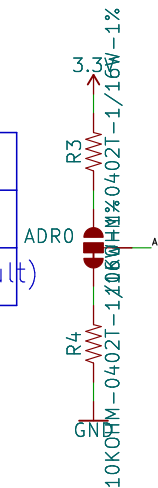

Connectors

PTH connectors only
accept 22AWG or smaller

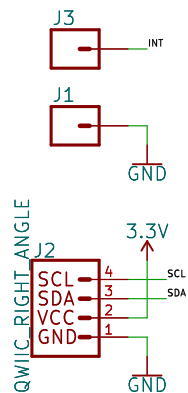

Test Points



Power LED

Cut trace to
disconnect
power LED



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: \${DESIGNER}

REV:
\${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Title:

Size: User

Date:

KiCad E.D.A. eeschema 7.0.6

Rev:

Id: 1/1