




APA102

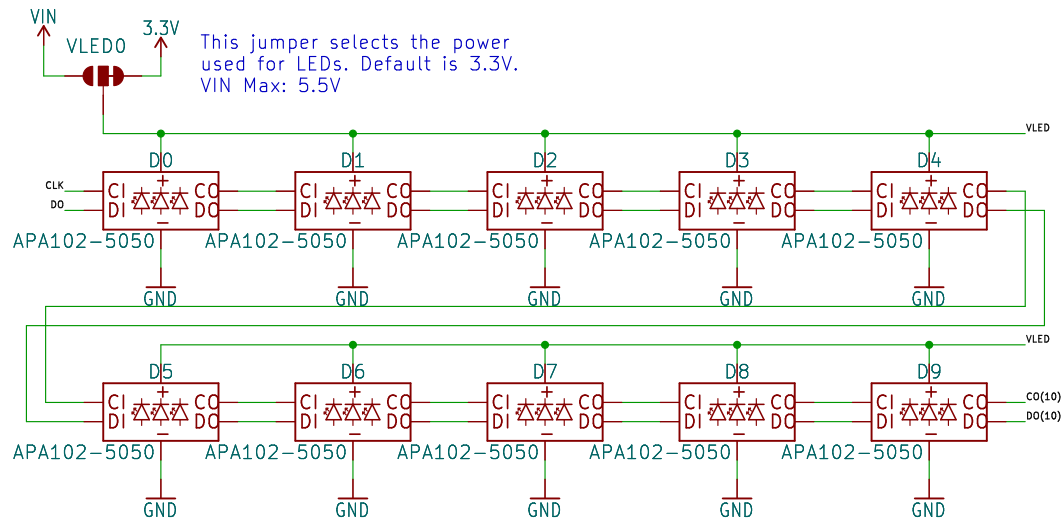



Connectors

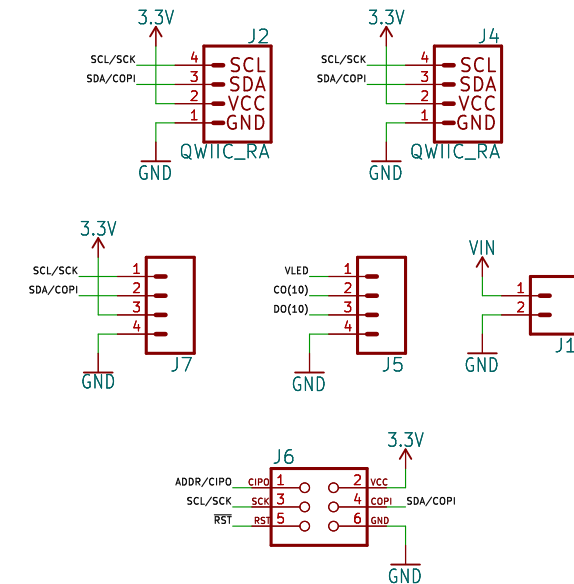

ATTiny85

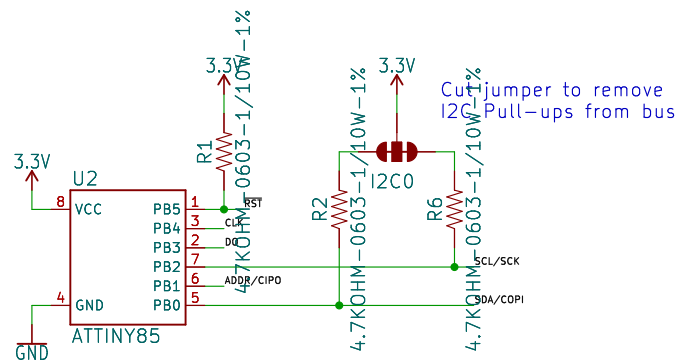

I2C Address Selection
Open Jumper (Default): 0x23
Closed Jumper: 0x22

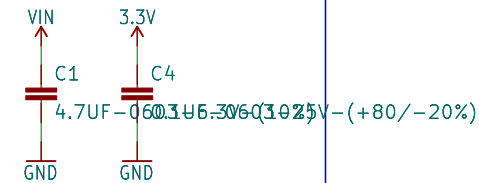

Power LED

Cut jumper to disable PWR LED



Operating voltage: 2.7V – 5.5V
7-bit unshifted I2C address: 0x23

sparkfun

qwilk
open hardware

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: C\${DESIGNER}

Revised by: Priyanka Makin

Date: \${CURRENT_DATE}

REV: \$10

Sheet: \${#}/\$10

Sheet: \${#}/\$10

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1