


Pressure Sensor – BMP581

VDD Range:
1.71V to 3.6V

WARNING


Interface pins should
be kept low while
not powered

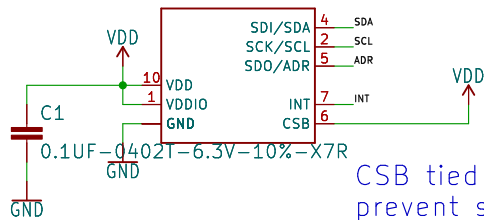

CSB tied to VDD to
prevent switching to SPI

SDA/SCL Pullups


Cut traces to remove pullup resistors

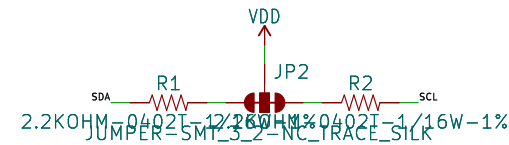


Test Points

Connectors

PTH connectors only
accept 22AWG or smaller




Power LED

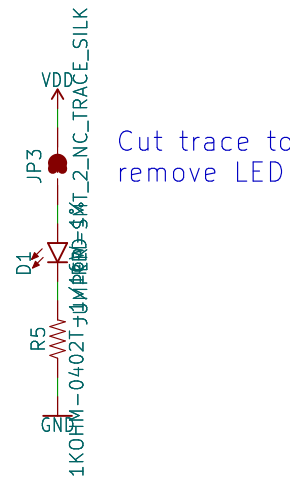

Cut trace to
remove LED

I2C Address Selection

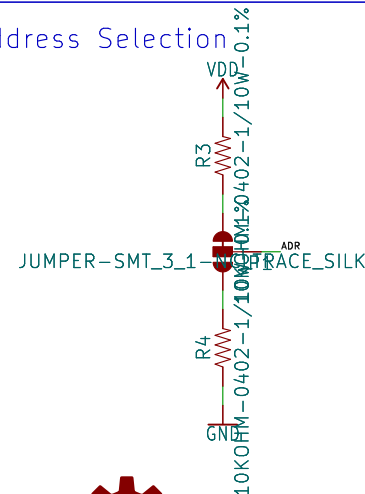

I2C Address Select

GND	0x46
VDD (Default)	0x47
Open	SPI
Both	Undef



Released under the Creative Commons

Attribution Share-Alike 4.0 License

<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: \${DESIGNER}

REV: \${REV}

Sheet: /

Date: \${CURRENT_DATE}

Sheet: \${#}/\$###

Size: User

Date:

Rev:

KiCad E.D.A. eeschema 7.0.6

Id: 1/1