

Voltage Regulator and Battery Charger

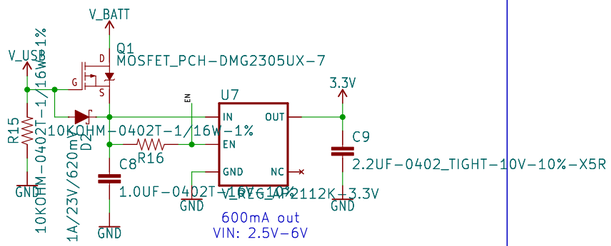


Lithium-Polymer Battery Charger (1-cell)

V_BATT should be a single-cell LiPo battery.

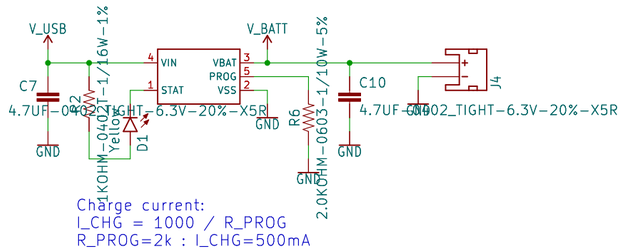


Charge current:
I_CHG = 1000 / R_PROG
R_PROG=2k : I_CHG=500mA


Debug Header




USB Connector




Raspberry Pi RP2040

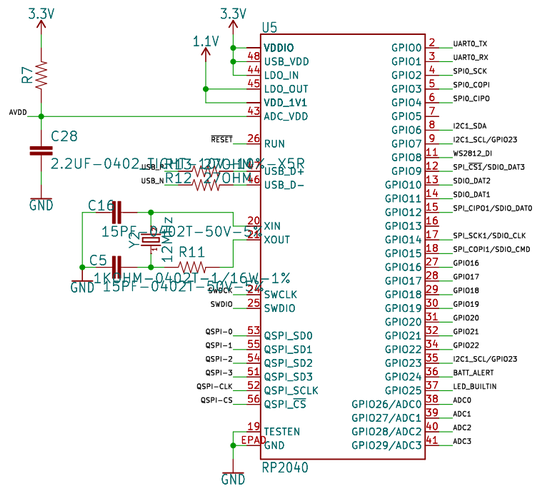


PIO must be contiguous for SDIO DAT pins but can fall back to SPI1

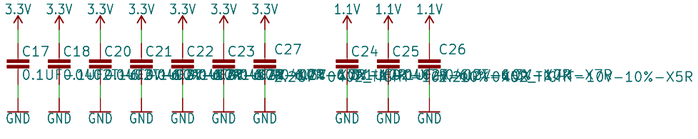

WS2812




Qwiic Connector




Cut the I2C pullup jumper to remove the pullups from the SDA and SCL lines

16MB / 128mbit Flash

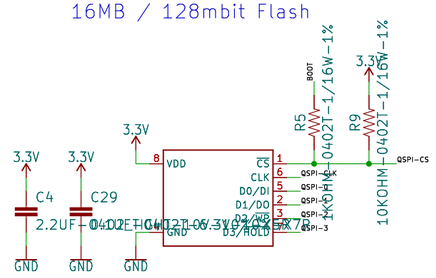


Battery Fuel Gauge




I2C_ADDR: 0x36


uSD Connector




Headers



Status LED



Power LED



Boot Select



Reset Button



Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/

TITLE: ${PROJECTNAME}

Design by: ${DESIGNER}

REV: ${REV}

Sheet: /

File: ${KICAD_PCB_PATH}

Date: ${CURRENT_DATE}

Sheet: ${#}/${##}

Title:

Size: User

Date:

Rev:

KiCad E.D.A. eeschema 7.0.6

Id: 1/1