
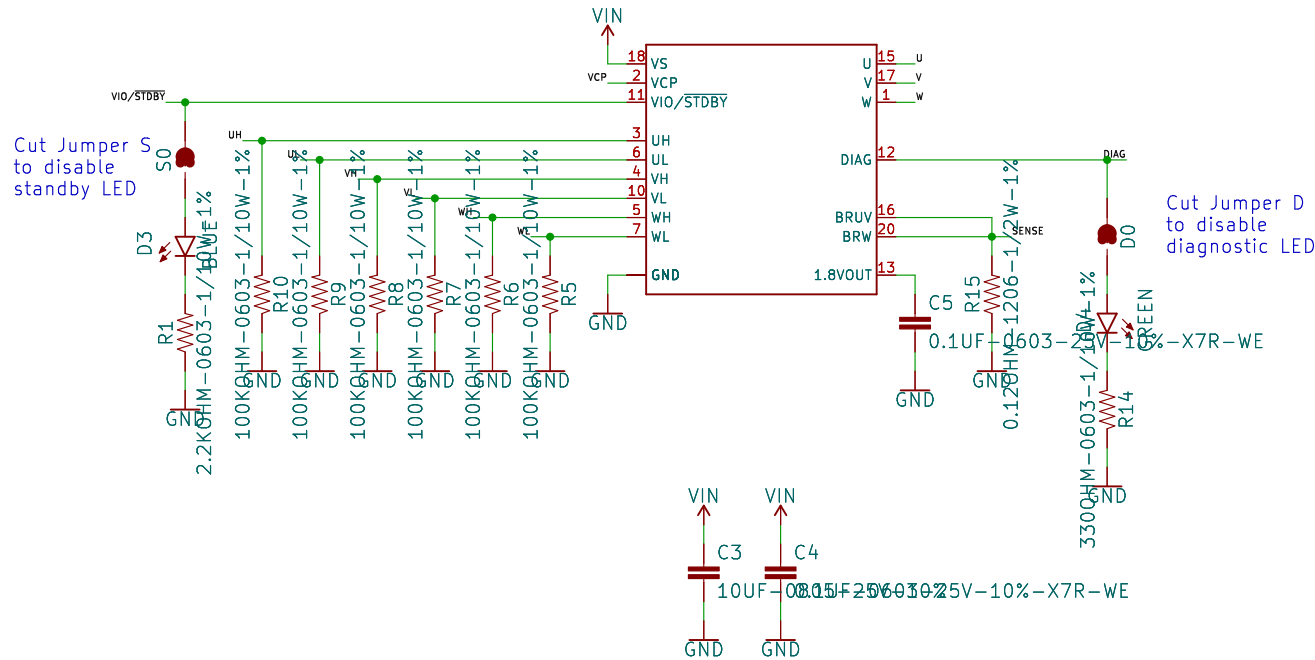


3-Phase Brushless Motor Driver

Input Range: 2V to 11V
I/O Supply: 2 - 5.25V
Max Current: 2A

0.1" Headers



Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Special Instructions

Design by: N. \${DESIGNER}

Revised by: M. Chodikov

REV: 1.0
\${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date: KiCad E.D.A. eeschema 7.0.6

Rev: Id: 1/1