


Circuit ground region

J3, J4, J5 are normals of TRS connections. If jack is not present, they connect to their respective T/R/S connections. If jack is present, they float.

D1, D2, D3, D4 form extended range clamp, holding input to 12V beyond the supply rails. The max Vin range published for the IC is $\pm 31V$.

This board requires bipolar power, in the range from $\pm 5\text{VDC}$ to $\pm 20\text{VDC}$.

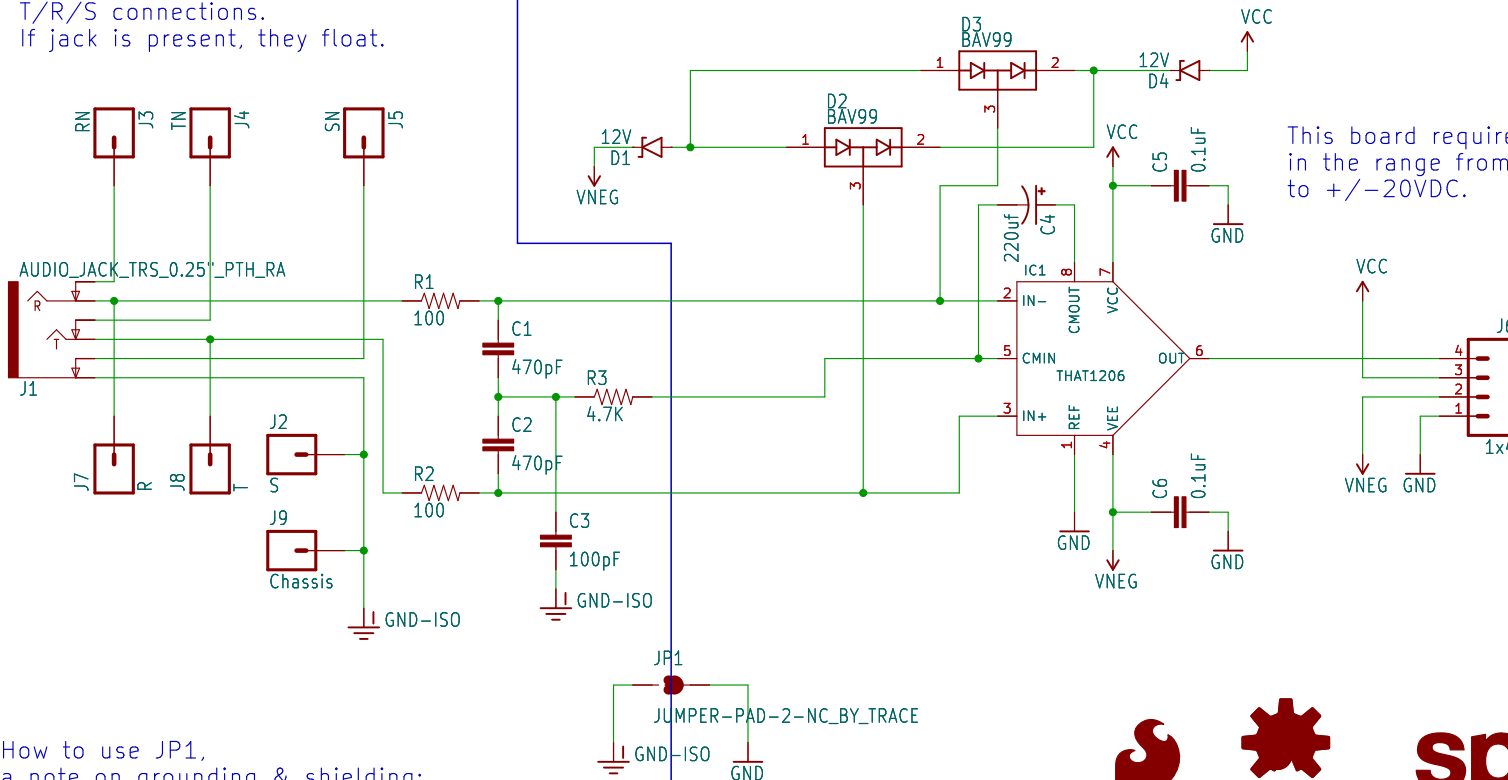

How to use JP1,
a note on grounding & shielding:
For prototyping/breadboarding, the entire board is grounded through the output connector (J4). In that case, leave JP1 intact.
If installing in a metal enclosure, the enclosure should be tied to earth, and the shield should be tied to the enclosure as directly as possible. In this case, cut JP1, and run a heavy wire from J9 to the chassis. This avoids the common "pin 1 problem,"
<http://www.rane.com/note151.html>
<http://www.rane.com/note165.html>



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by:	Byron Jacquot
------------	---------------

REV:
V10

	Sheet: /
Date: $\{CURRENT_DATE\}$	File: $\{workingDir\} \backslash \{sch\}$

Sheet: \${#}/\${##}

Size: User	Date:
KiCad E.D.A.	eeschema 7.0.6

Rev:
Id: 1/1