



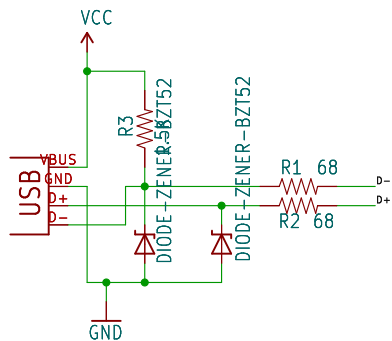










SJ2:
Closed: Target is powered from 5V USB
Open: Target must have external VCC provided

3x2 connector can be used to program targets.

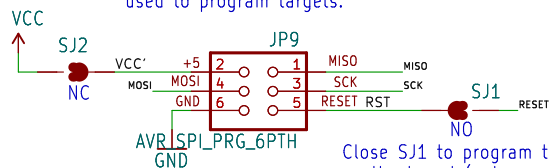

Close SJ1 to program the ATtiny84 on the board (not recommended).

Changes on v1.2:
Capitalized on silk indicators
Squished PCB layout
Added 6-pin SIP to end of board
Added comments to schematic

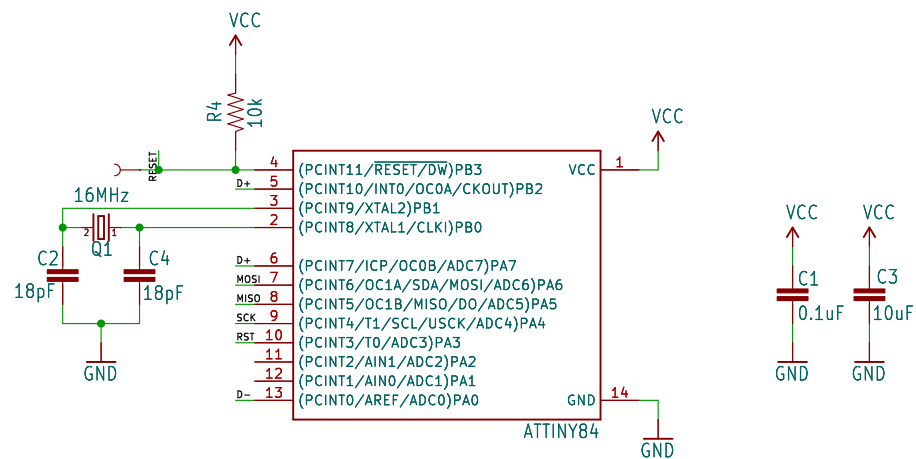

Released under the Creative Commons Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0>

TITLE: \${PROJECTNAME}

Design by: David A. Mellis, Jordan McConnell
REV: v13

Date: \${CURRENT_DATE} Sheet: \${#}/\${##}

Size: User Date: KiCad E.D.A. eeschema 7.0.6 Rev: Id: 1/1