



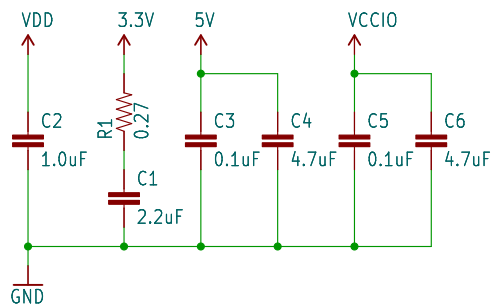



## Power Supply and Distribution

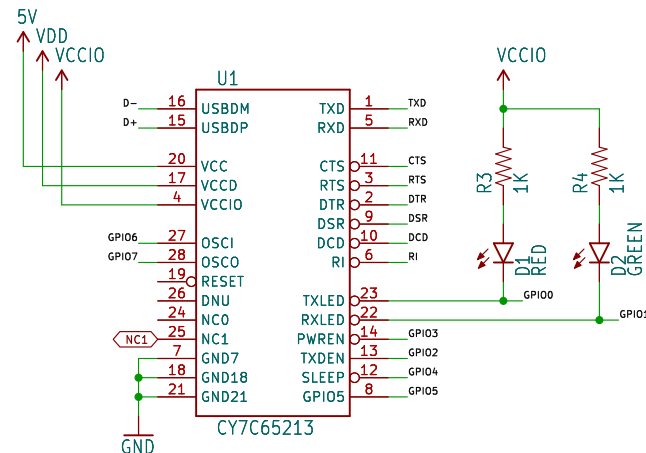





VDD protection circuit  
Use of battery charger  
may cause spikes on  
5V line.



D3 and D5 clamp DTR to VCCIO and GND during Arduino programming. This chip is particularly susceptible to latchup events.

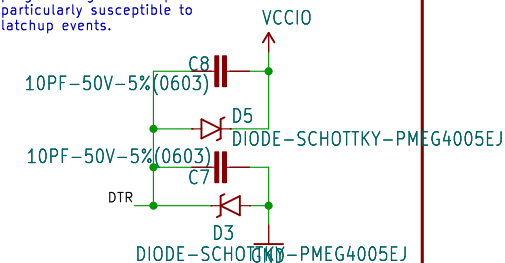

## CY7C65213 Connectors



sparkfun

open hardware

Released under the Creative Commons Attribution Share-Alike 4.0 License  
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Mike Hord

REV: 10

Date: \${CURRENT\_DATE}

Sheet: \${#}/\${##}

Size: User Date: KiCad E.D.A. eschema 7.0.6

Rev: Id: 1/1