




Power

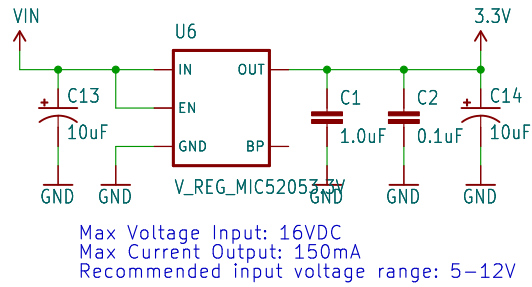


Conversion

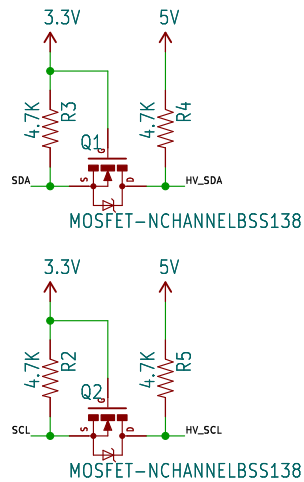

Arduino

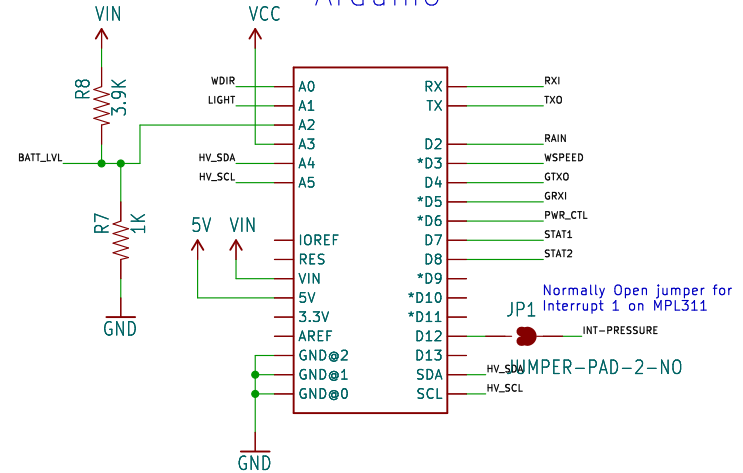


Sensors




7-bit I2C Address is 0x40
I2C write is 0x80
I2C read is 0x81


Pressure

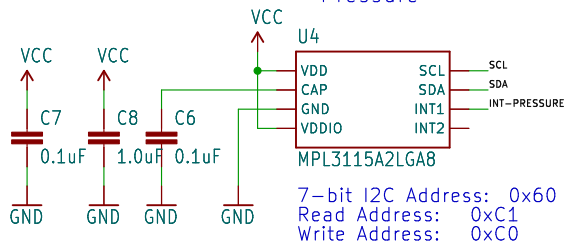


Rain (optional)

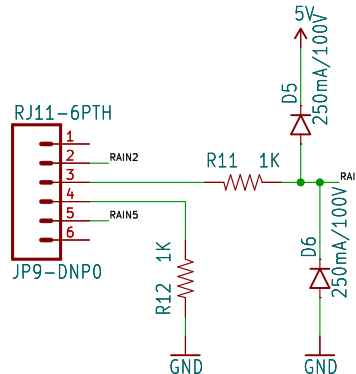


Wind (optional)

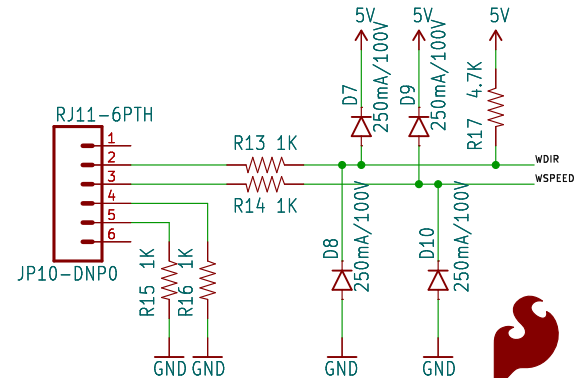


sparkfun

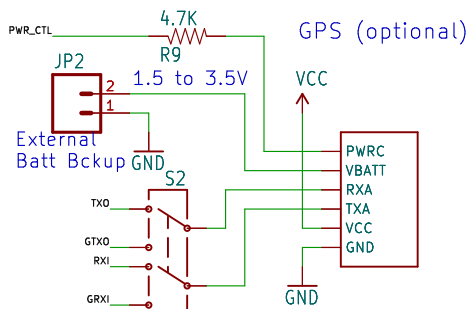

Digital Pins 4 and 5 are used for software serial with switch is set to "Soft".



LEDs



open hardware



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: N. Seidle

Revision By: Joel Bartlett

REV:
v1.2

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1