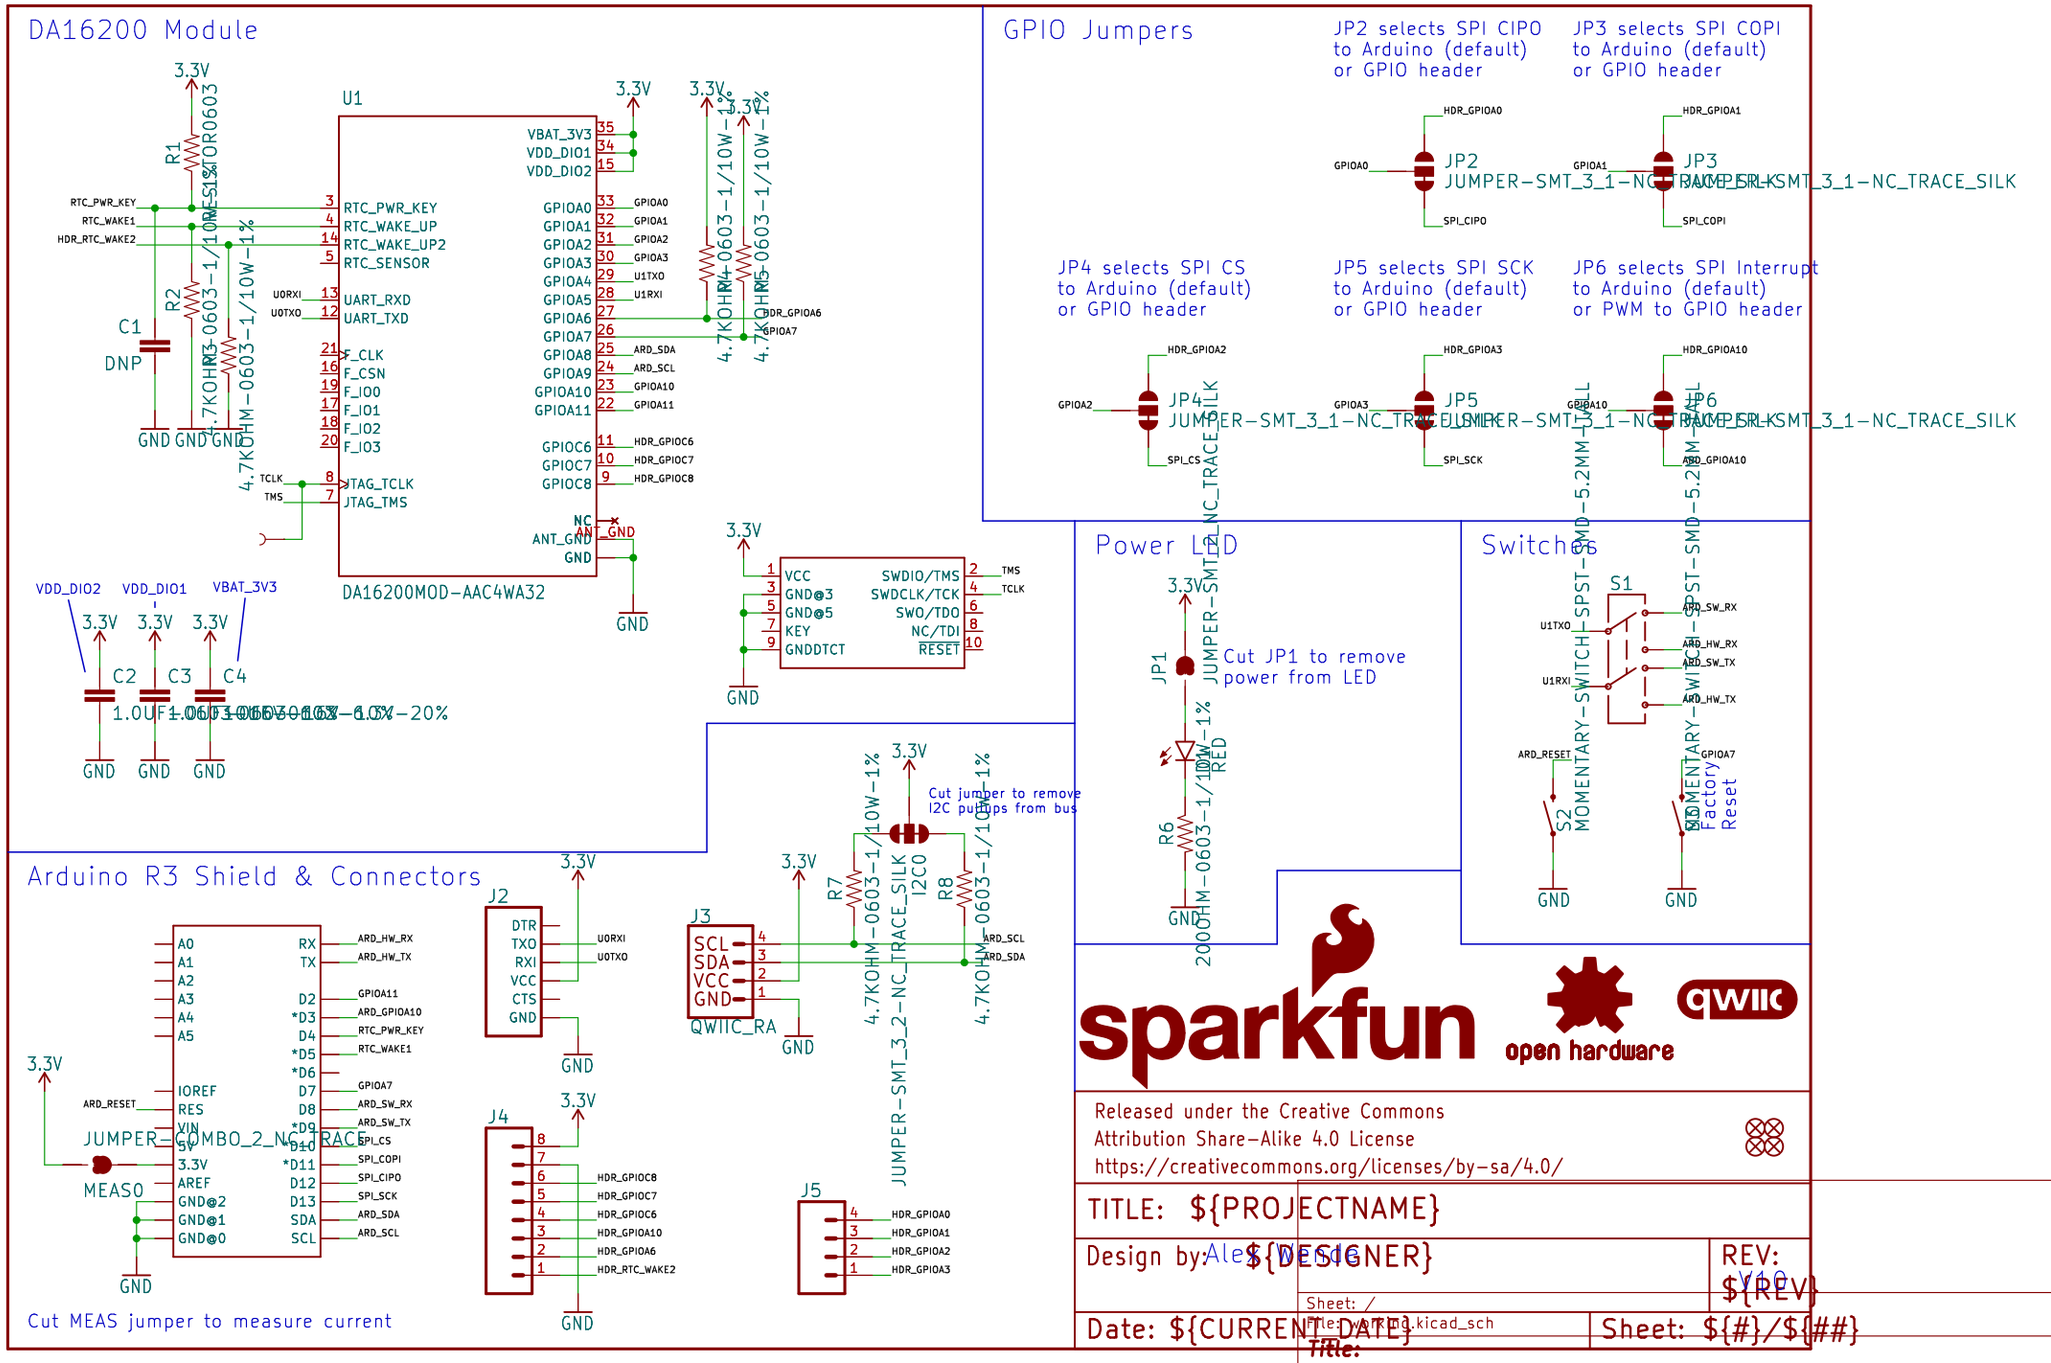

DA16200 Module
U1
DA16200MOD-AAC4WA32
GPIO Jumpers
JP2 selects SPI CIPO to Arduino (default) or GPIO header
JP3 selects SPI COPI to Arduino (default) or GPIO header
JP4 selects SPI CS to Arduino (default) or GPIO header
JP5 selects SPI SCK to Arduino (default) or GPIO header
JP6 selects SPI Interrupt to Arduino (default) or PWM to GPIO header
Power LED
Cut JP1 to remove power from LED
Switches
Arduino R3 Shield & Connectors
Cut jumper to remove I2C pullups from bus
Cut MEAS jumper to measure current
sparkfun
open hardware
Released under the Creative Commons Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
TITLE: ${PROJECTNAME}
Design by: ${DESIGNER}
REV: ${REV}
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
Sheet: /
File: DA16200.kicad_sch
Title:
Size: User
Date:
Rev:
KiCad E.D.A. eeschema 7.0.6
Id: 1/1