




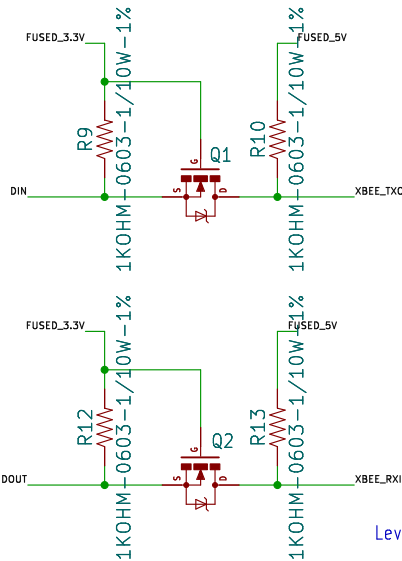


Level shifting circuit for XBEE

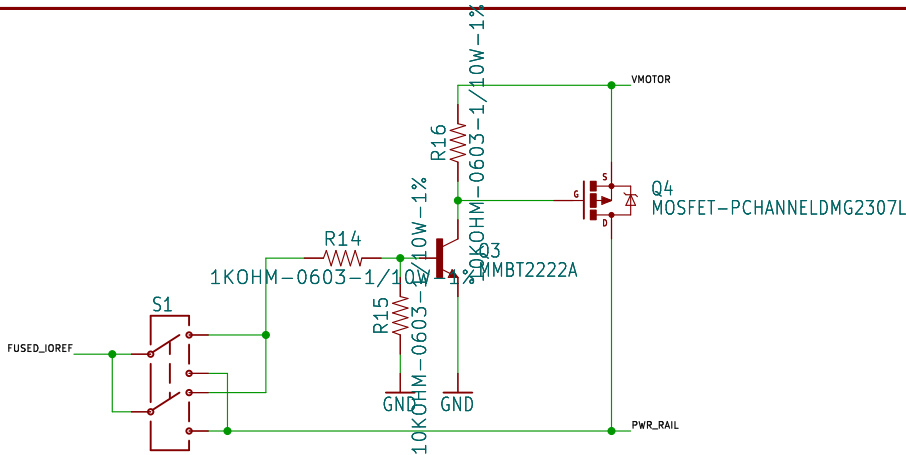




Power Rail Select Switch

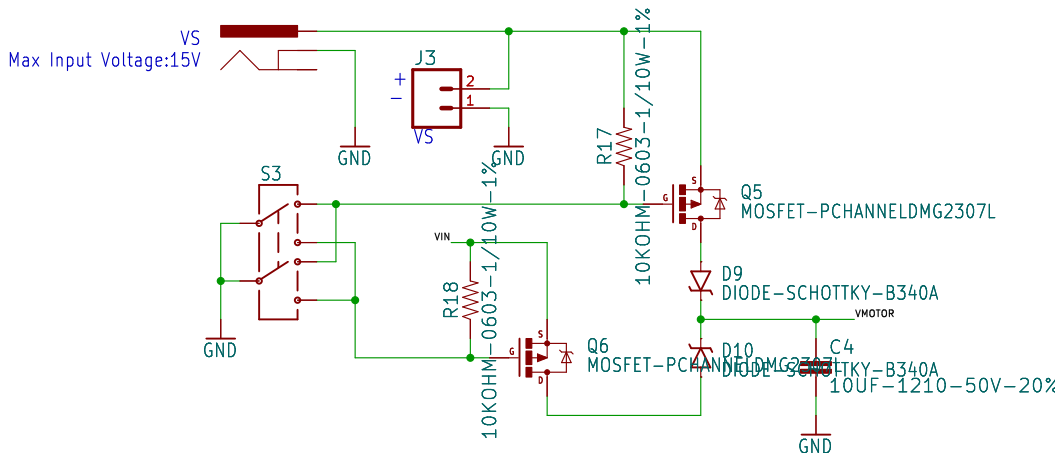


Power Input Select Switch

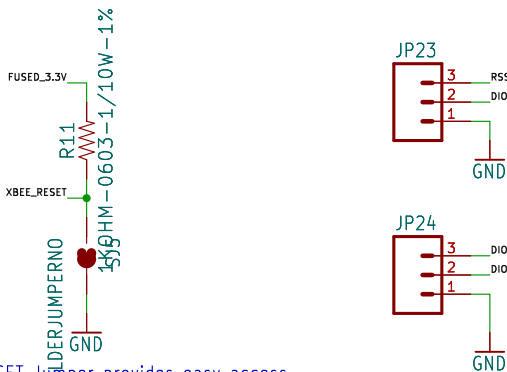


RESET Jumper provides easy access to reset the XBEE Radio Module using the flat end of a screwdriver or something comparable.

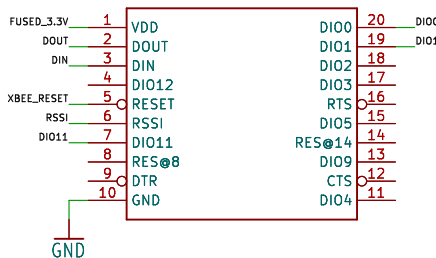


XBee Breakout

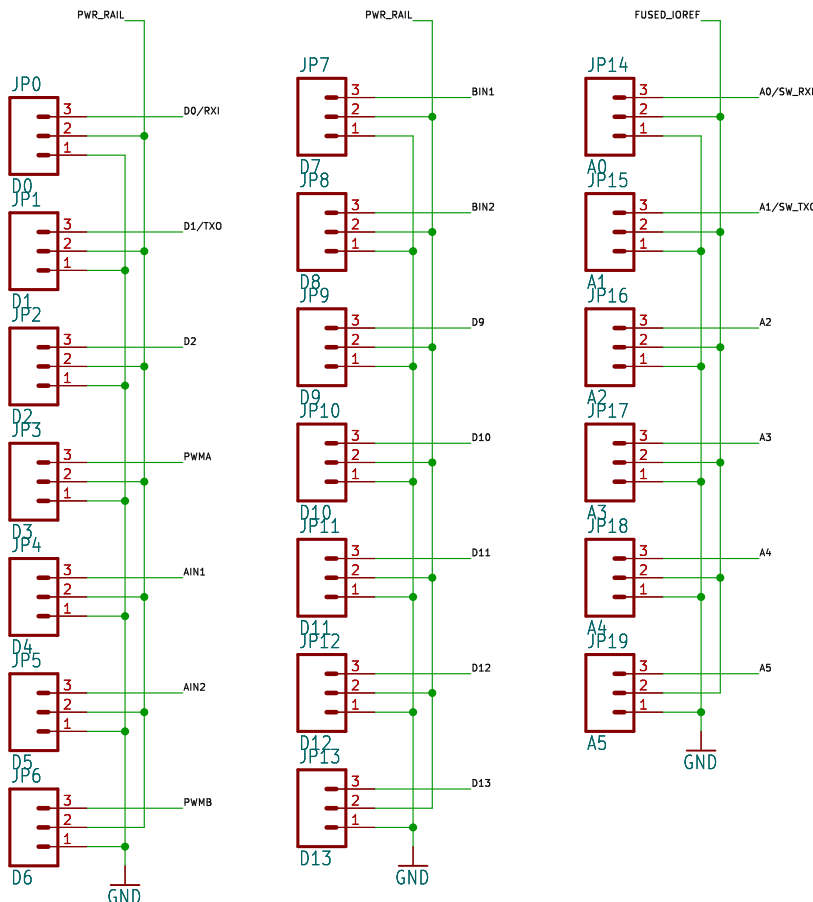


3 Pin Header Field

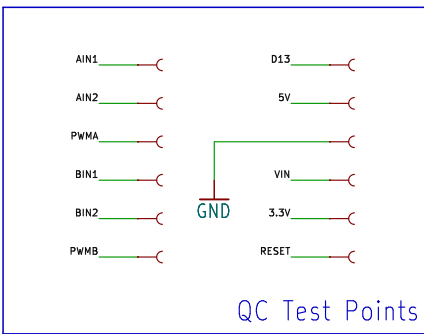


QC Test Points




I2C Header

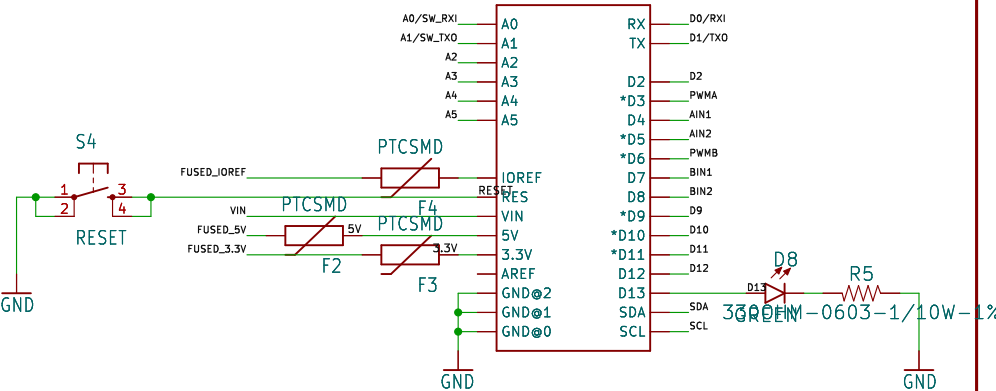


Arduino Shield

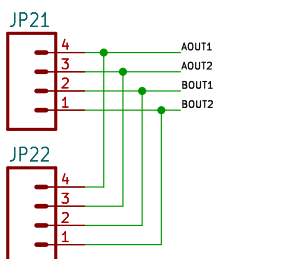

H-Bridge Driver

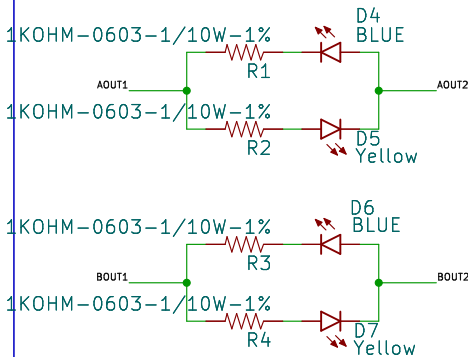

Motor Outputs

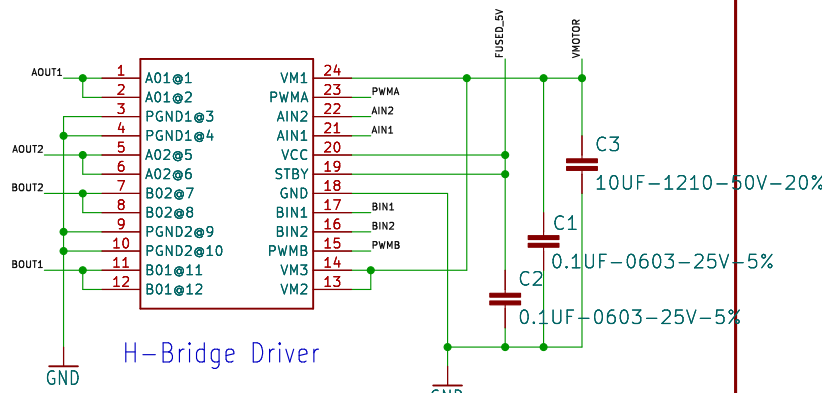

Dual Motor Driver:

Motor A
Pwm (pin 3)
AIN1 (pin 4)
AIN2 (pin 5)

Motor B
Pwm (pin 6)
BIN1 (pin 7)
BIN2 (pin 8)

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}		
Design by: B. Huang Revised by Shawn Hymel		
Date: \${CURRENT_DATE}		
Rev: v14		