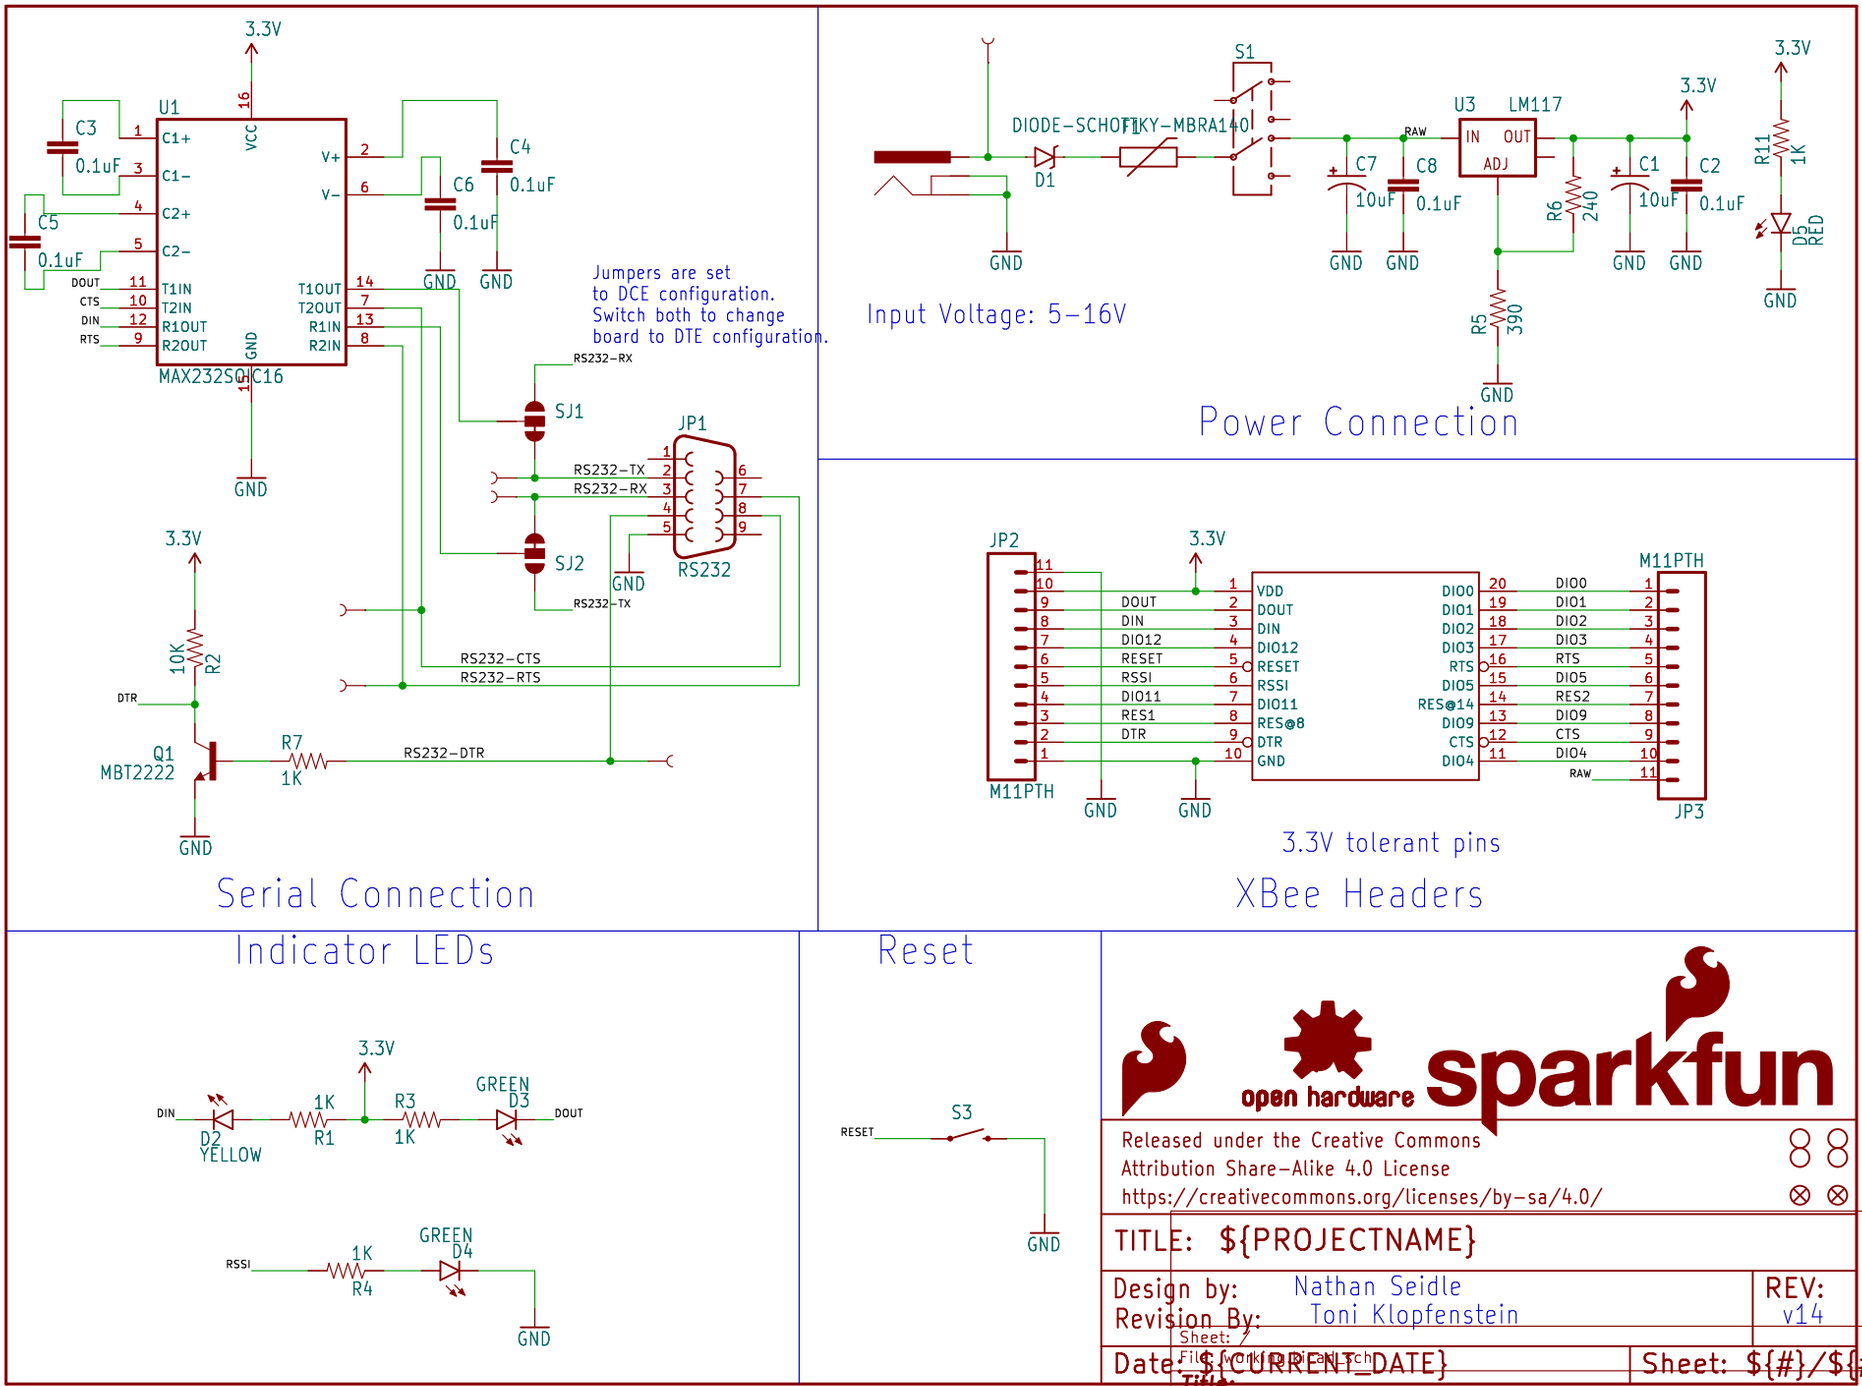
3.3V
U1
MAX232SOIC16
C3
0.1uF
C4
0.1uF
C5
0.1uF
C6
0.1uF
C1+
C1-
C2+
C2-
V+
V-
T1IN
T2IN
R1OUT
R2OUT
T1OUT
T2OUT
R1IN
R2IN
VCC
GND
DOUT
CTS
DIN
RTS
Jumpers are set
to DCE configuration.
Switch both to change
board to DTE configuration.
RS232-RX
SJ1
SJ2
JP1
RS232
RS232-TX
RS232-RX
RS232-CTS
RS232-RTS
RS232-DTR
10K
R2
DTR
Q1
MBT2222
R7
1K
Serial Connection
S1
DIODE-SCHOTTKY-MBRA140
D1
U3
LM117
IN
OUT
ADJ
RAW
C7
10uF
C8
0.1uF
C1
10uF
C2
0.1uF
R6
240
R5
390
R11
1K
D5
RED
Input Voltage: 5-16V
Power Connection
JP2
M11PTH
VDD
DOUT
DIN
DIO12
RESET
RSSI
DIO11
RES@8
DTR
GND
DIO0
DIO1
DIO2
DIO3
RTS
DIO5
RES@14
DIO9
CTS
DIO4
RES2
JP3
3.3V tolerant pins
XBee Headers
Indicator LEDs
DIN
D2
YELLOW
R1
1K
R3
1K
D3
GREEN
DOUT
RSSI
R4
1K
D4
GREEN
Reset
S3
RESET
Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
TITLE: ${PROJECTNAME}
Design by: Nathan Seidle
Revision By: Toni Klopfenstein
REV: v14
Sheet: /
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
Title:
Size: User
Date:
Rev:
KiCad E.D.A. eeschema 7.0.6
Id: 1/1