




Power Supply

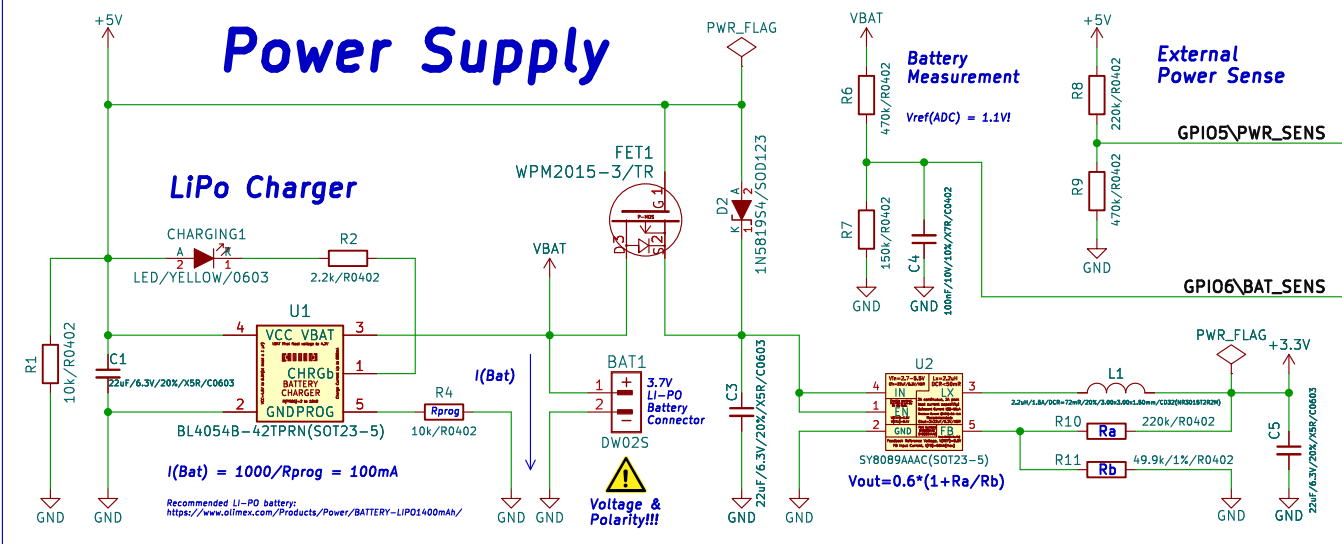

USB to UART

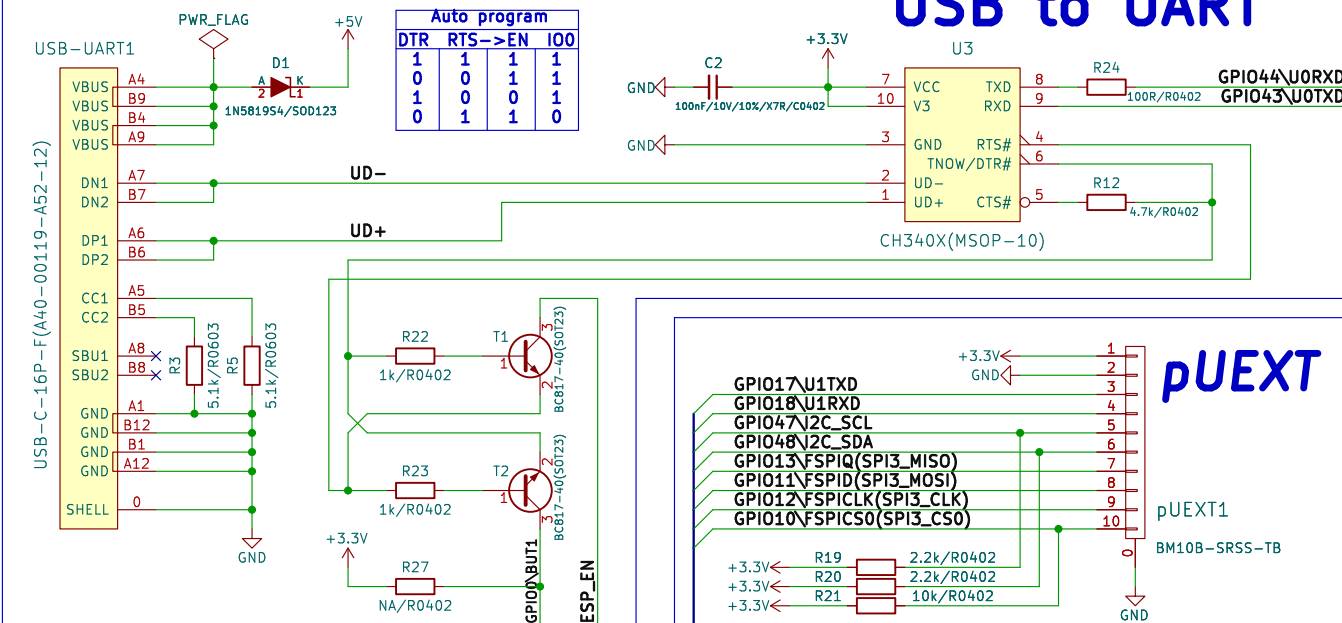


Extensions

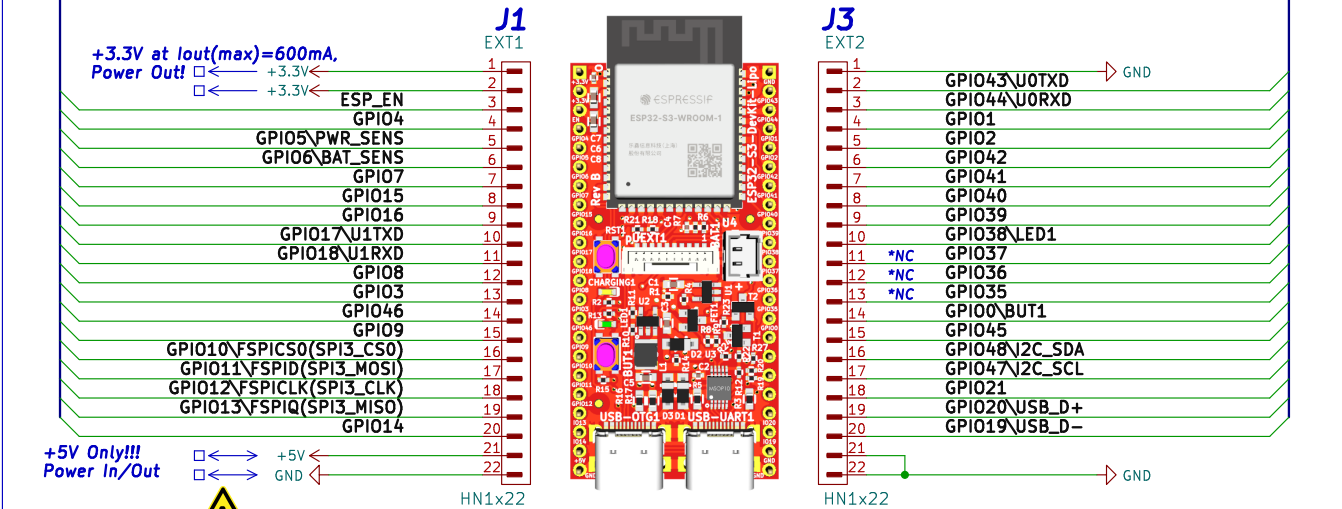


Extension's pinout is fully compatible to the Espressif's ESP32-S3-DevKitC-1.


ESP32-S3-WROOM MODULE

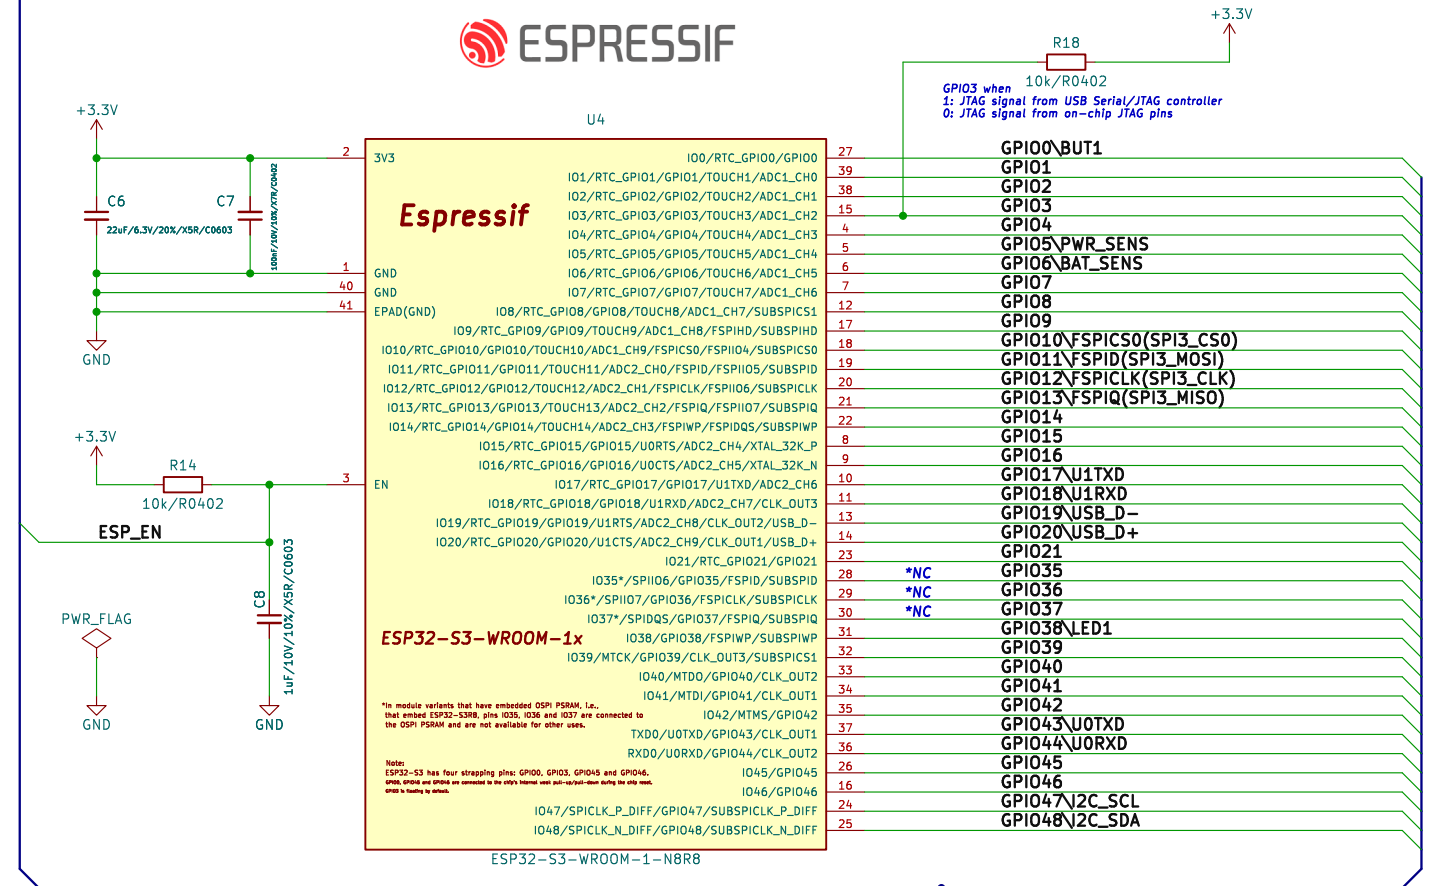


USER LED




Fiducials

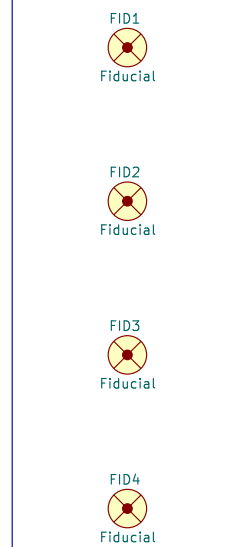


Full-speed USB 1.1 On-The-Go (OTG) interface or USB Serial/JTAG controller. The ESP32-S3 contains an USB Serial/JTAG controller. This unit can be used to program the SoC's flash, read program output, as well as attach a debugger to the running program. The ESP32-S3 has an internal PHY, which is shared between the USB-OTG and the USB Serial/JTAG hardware. Either one of these can use the internal PHY.

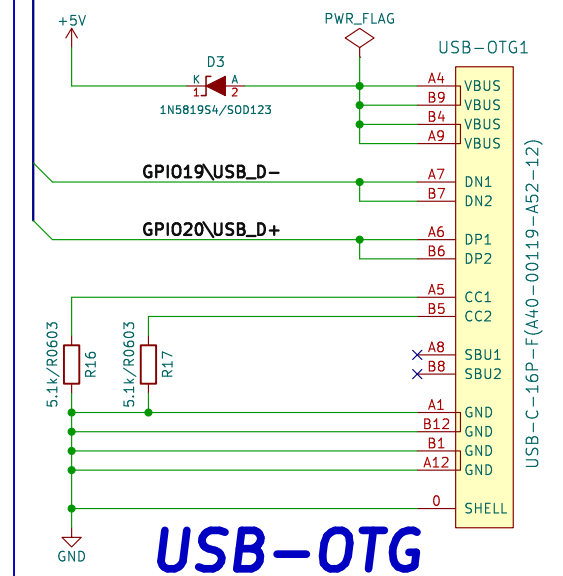

Reset Button

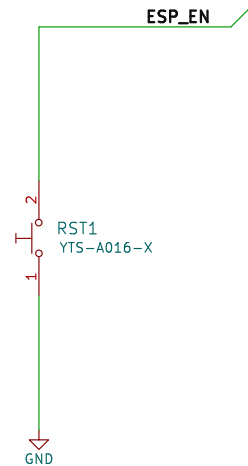

USER Button

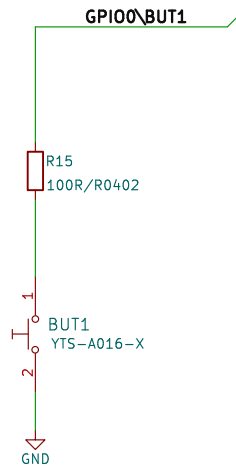

www.olimex.com

OLIMEX LTD

Sheet: /
File: working.kicad_sch

Title: ESP32-S3-DevKit-LiPo

Size: A3

Date: 2023-05-16

KiCad E.D.A.	eeschema 7.0.6
--------------	----------------



ev: B

Id: 1/1