


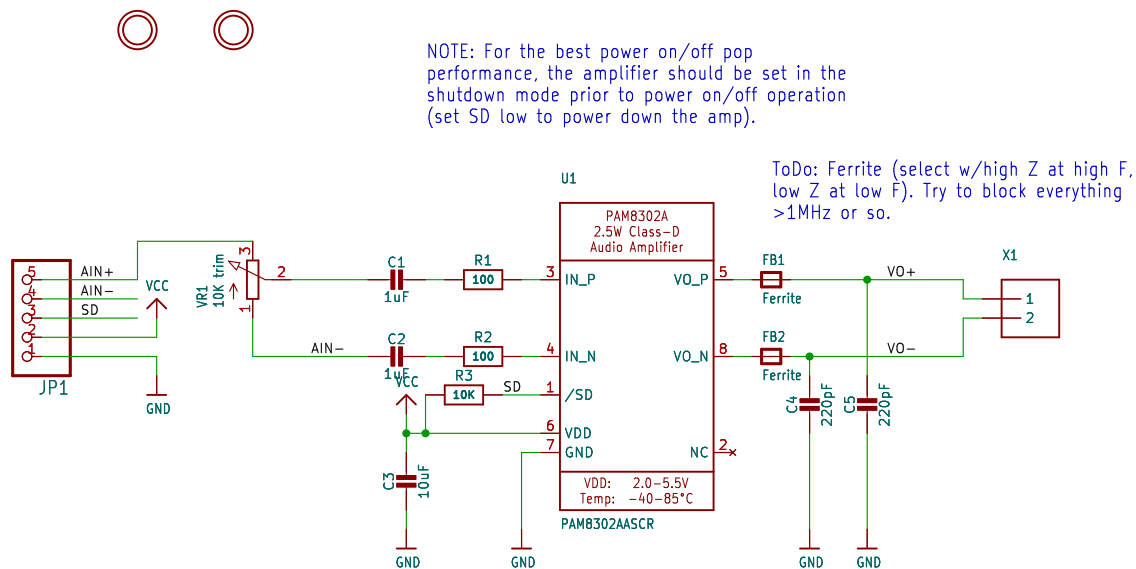

C3: Use 1uF to filter high frequency noise, or 10uF if lower frequency noise is present

ISSUE	\${COMPANY}		© 2014
DRAWN \${DRAWN}	TITLE		REV
CHECKED \${CHECKED}	DATE	\${REV}	
DATE \${DATE}	DRG No \${DRGNO}		
FILE: FILE: working.kicad_sch		PAGE: 1/1	

Title:			
Size: User	Date:	Rev:	
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1		Id: 1/1	