


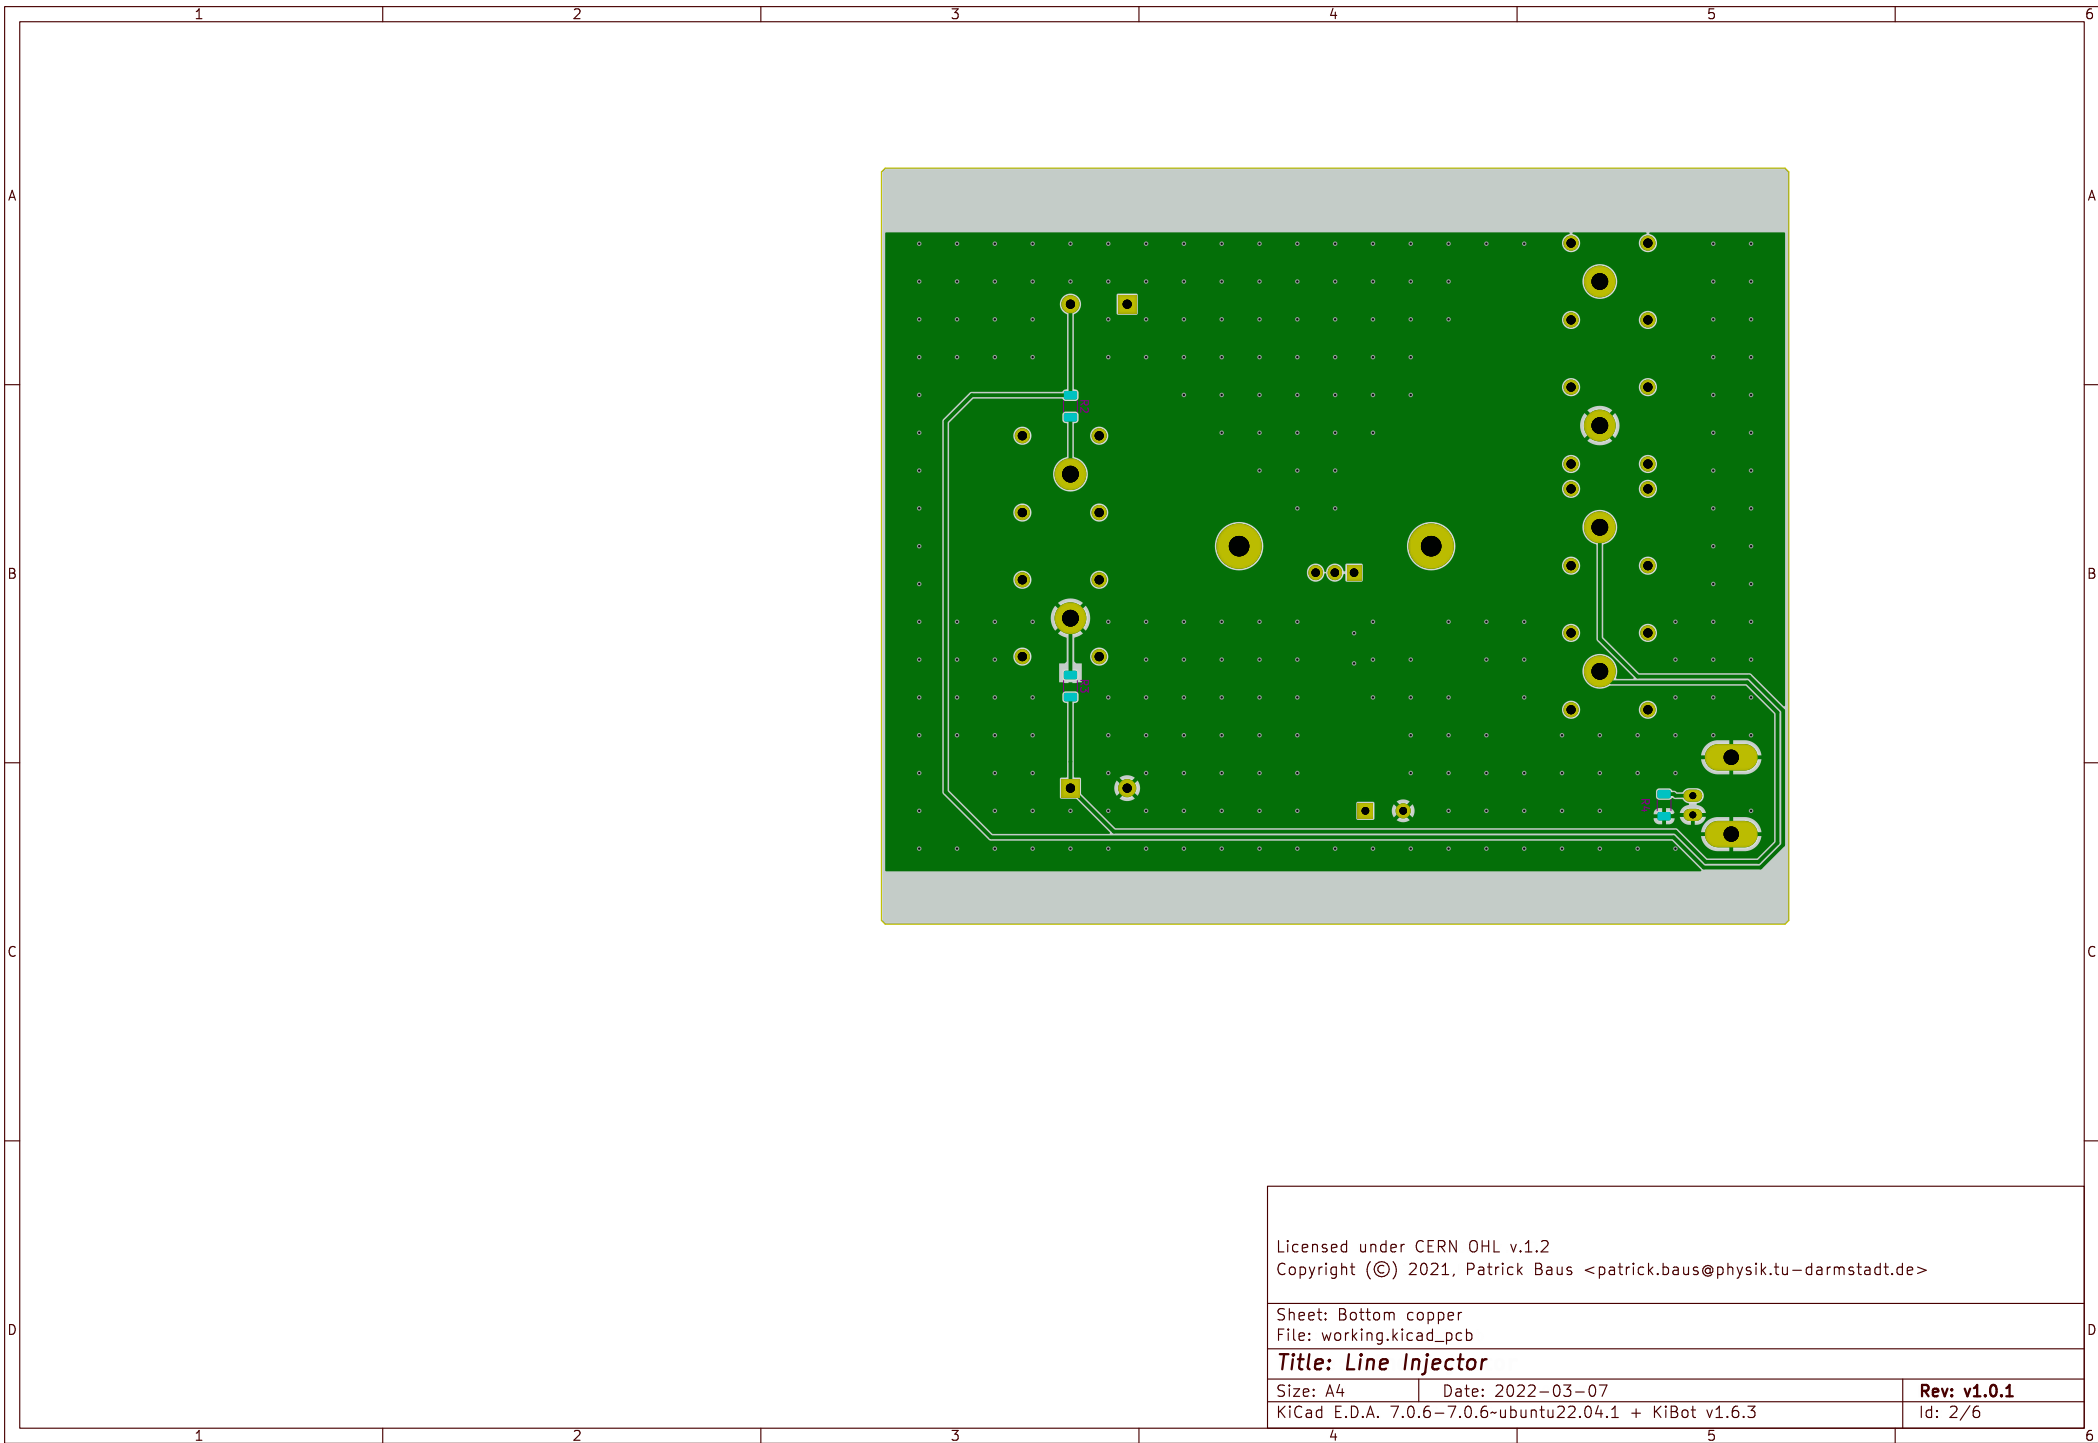


Licensed under CERN OHL v.1.2
Copyright (©) 2021, Patrick Baus <patrick.baus@physik.tu-darmstadt.de>

Sheet: Bottom copper
File: working.kicad_pcb

Title: Line Injector

Size: A4 Date: 2022-03-07
KiCad E.D.A. 7.0.6-7.0.6-ubuntu22.04.1 + KiBot v1.6.3

Rev: v1.0.1
Id: 2/6

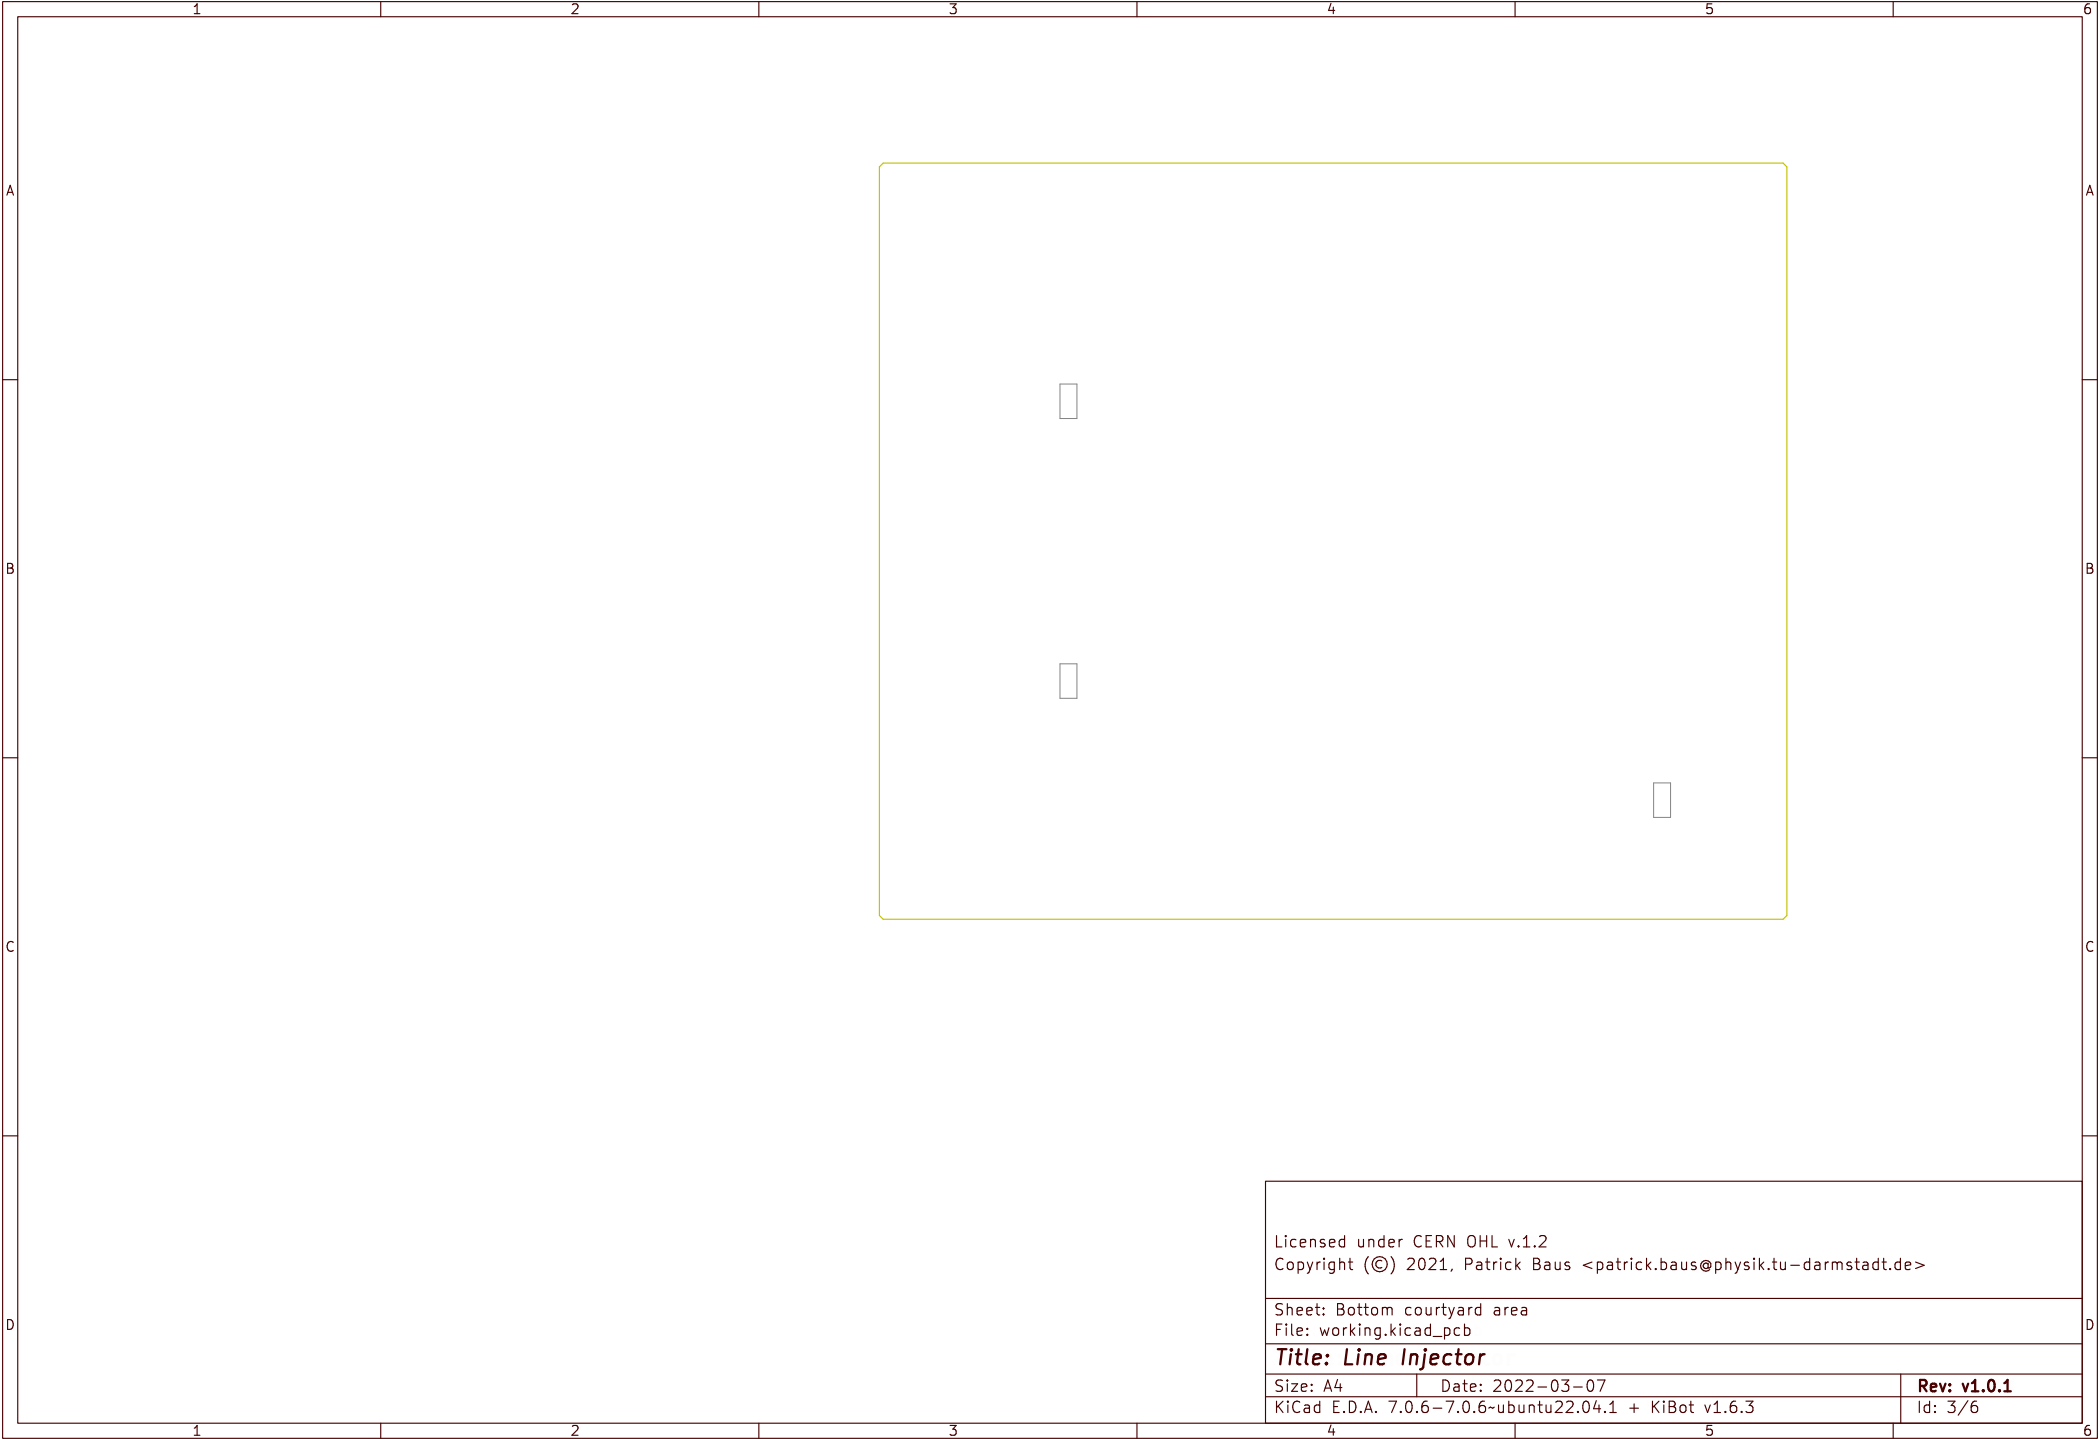


Licensed under CERN OHL v.1.2
Copyright (©) 2021, Patrick Baus <patrick.baus@physik.tu-darmstadt.de>

Sheet: Bottom courtyard area
File: working.kicad_pcb

Title: Line Injector

Size: A4	Date: 2022-03-07	Rev: v1.0.1
KiCad E.D.A. 7.0.6-7.0.6-ubuntu22.04.1 + KiBot v1.6.3		Id: 3/6

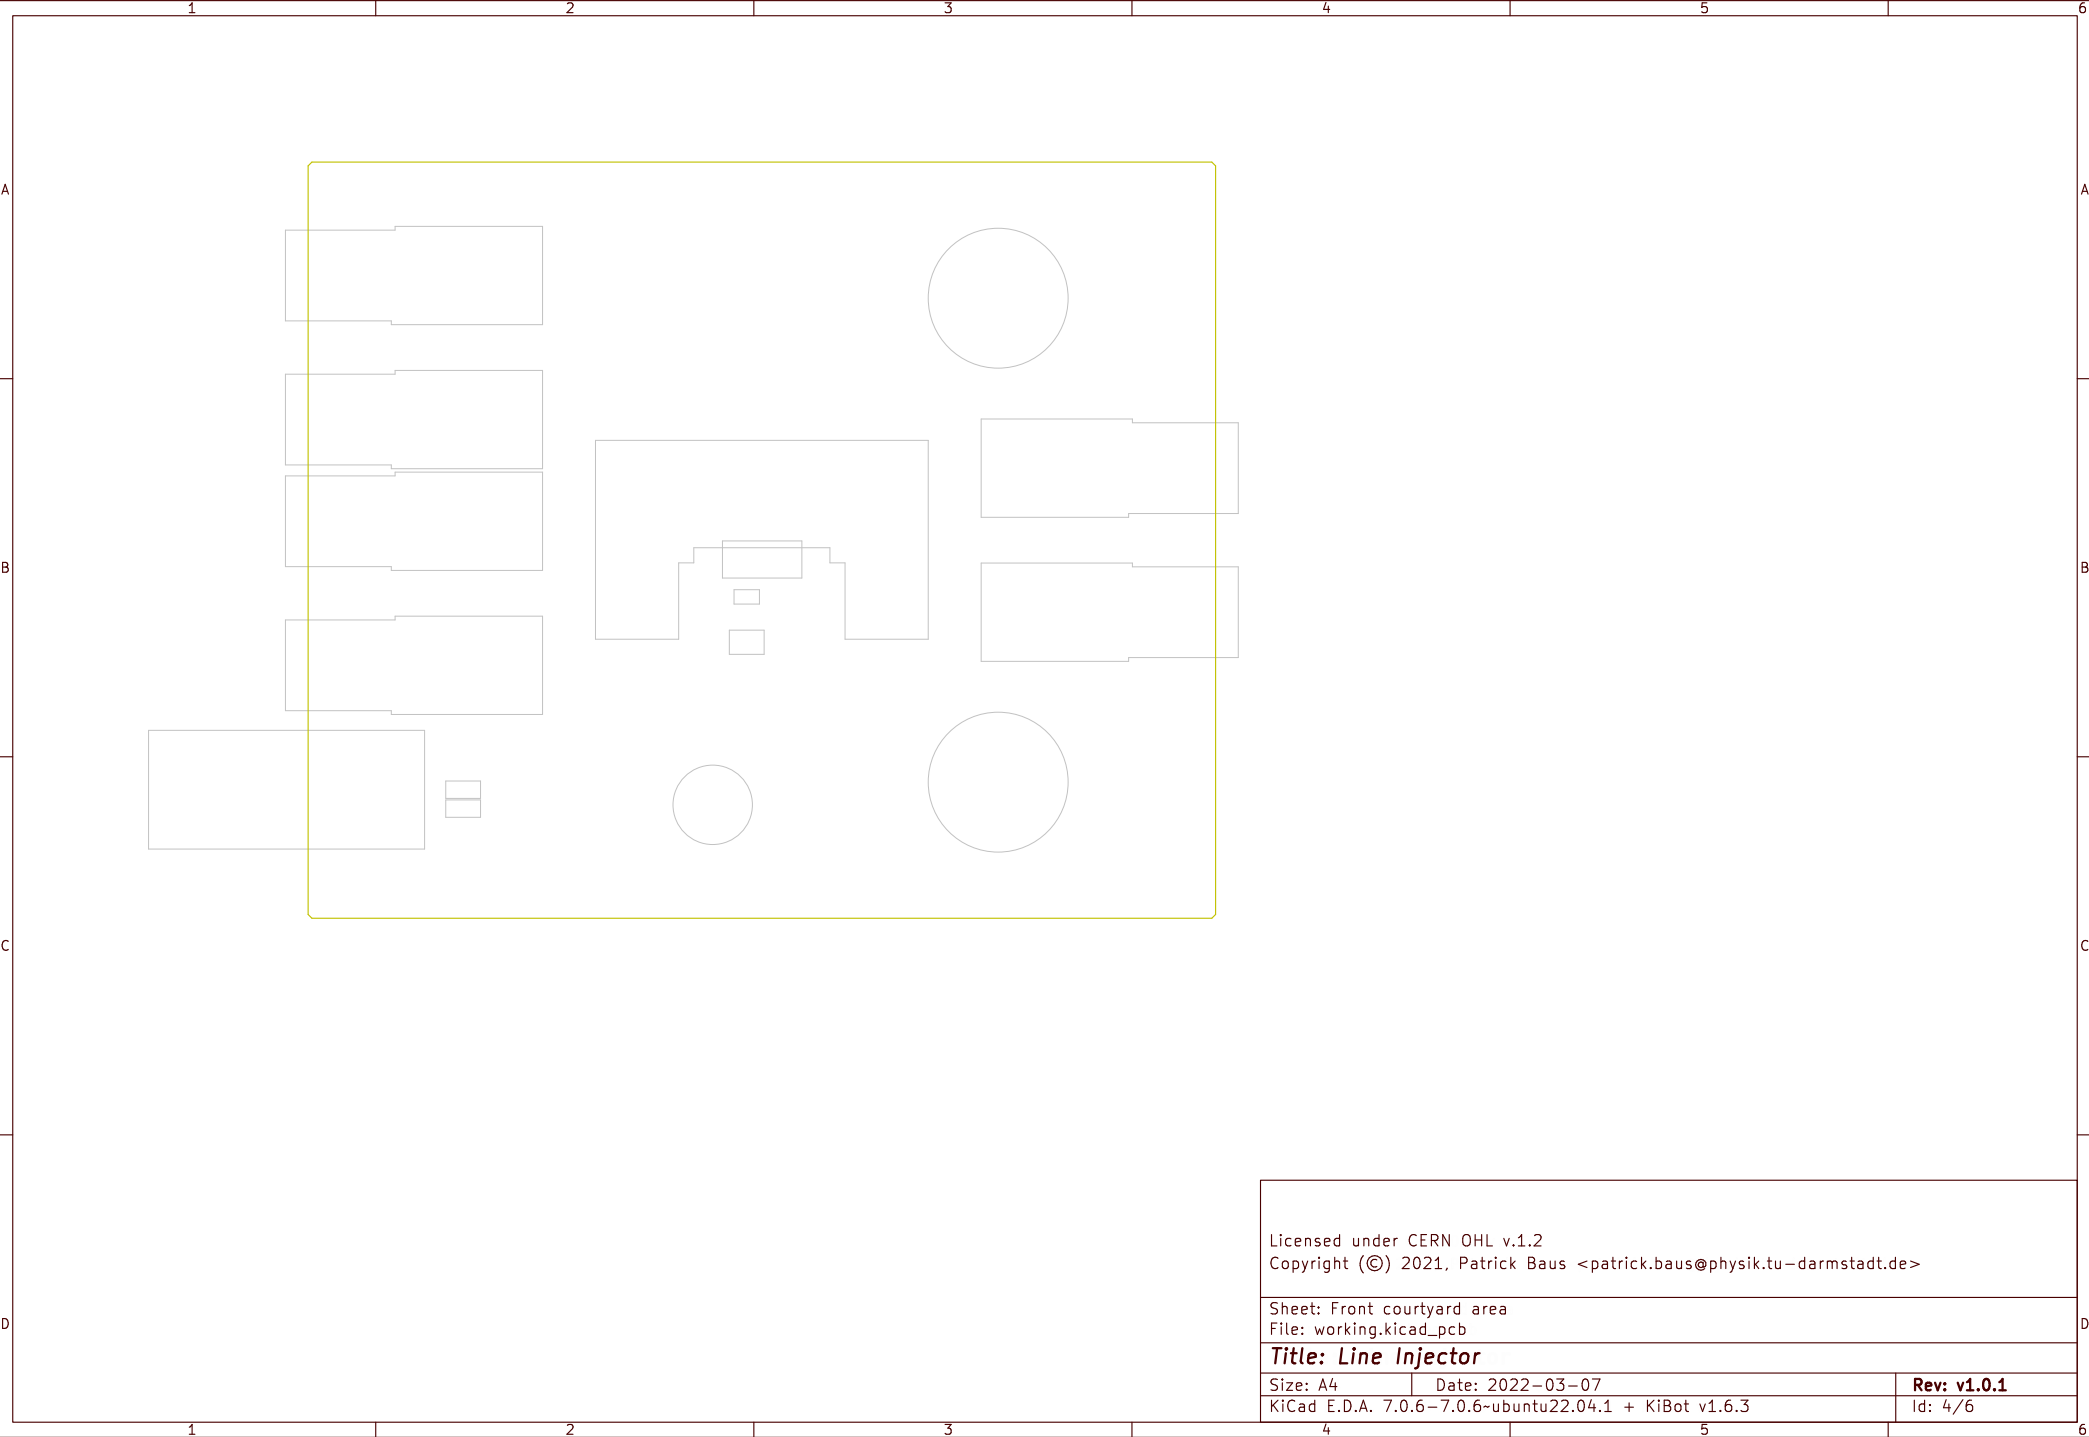


Licensed under CERN OHL v.1.2
Copyright (©) 2021, Patrick Baus <patrick.baus@physik.tu-darmstadt.de>

Sheet: Front courtyard area
File: working.kicad_pcb

Title: Line Injector

Size: A4	Date: 2022-03-07	Rev: v1.0.1
KiCad E.D.A. 7.0.6-7.0.6-ubuntu22.04.1 + KiBot v1.6.3		Id: 4/6

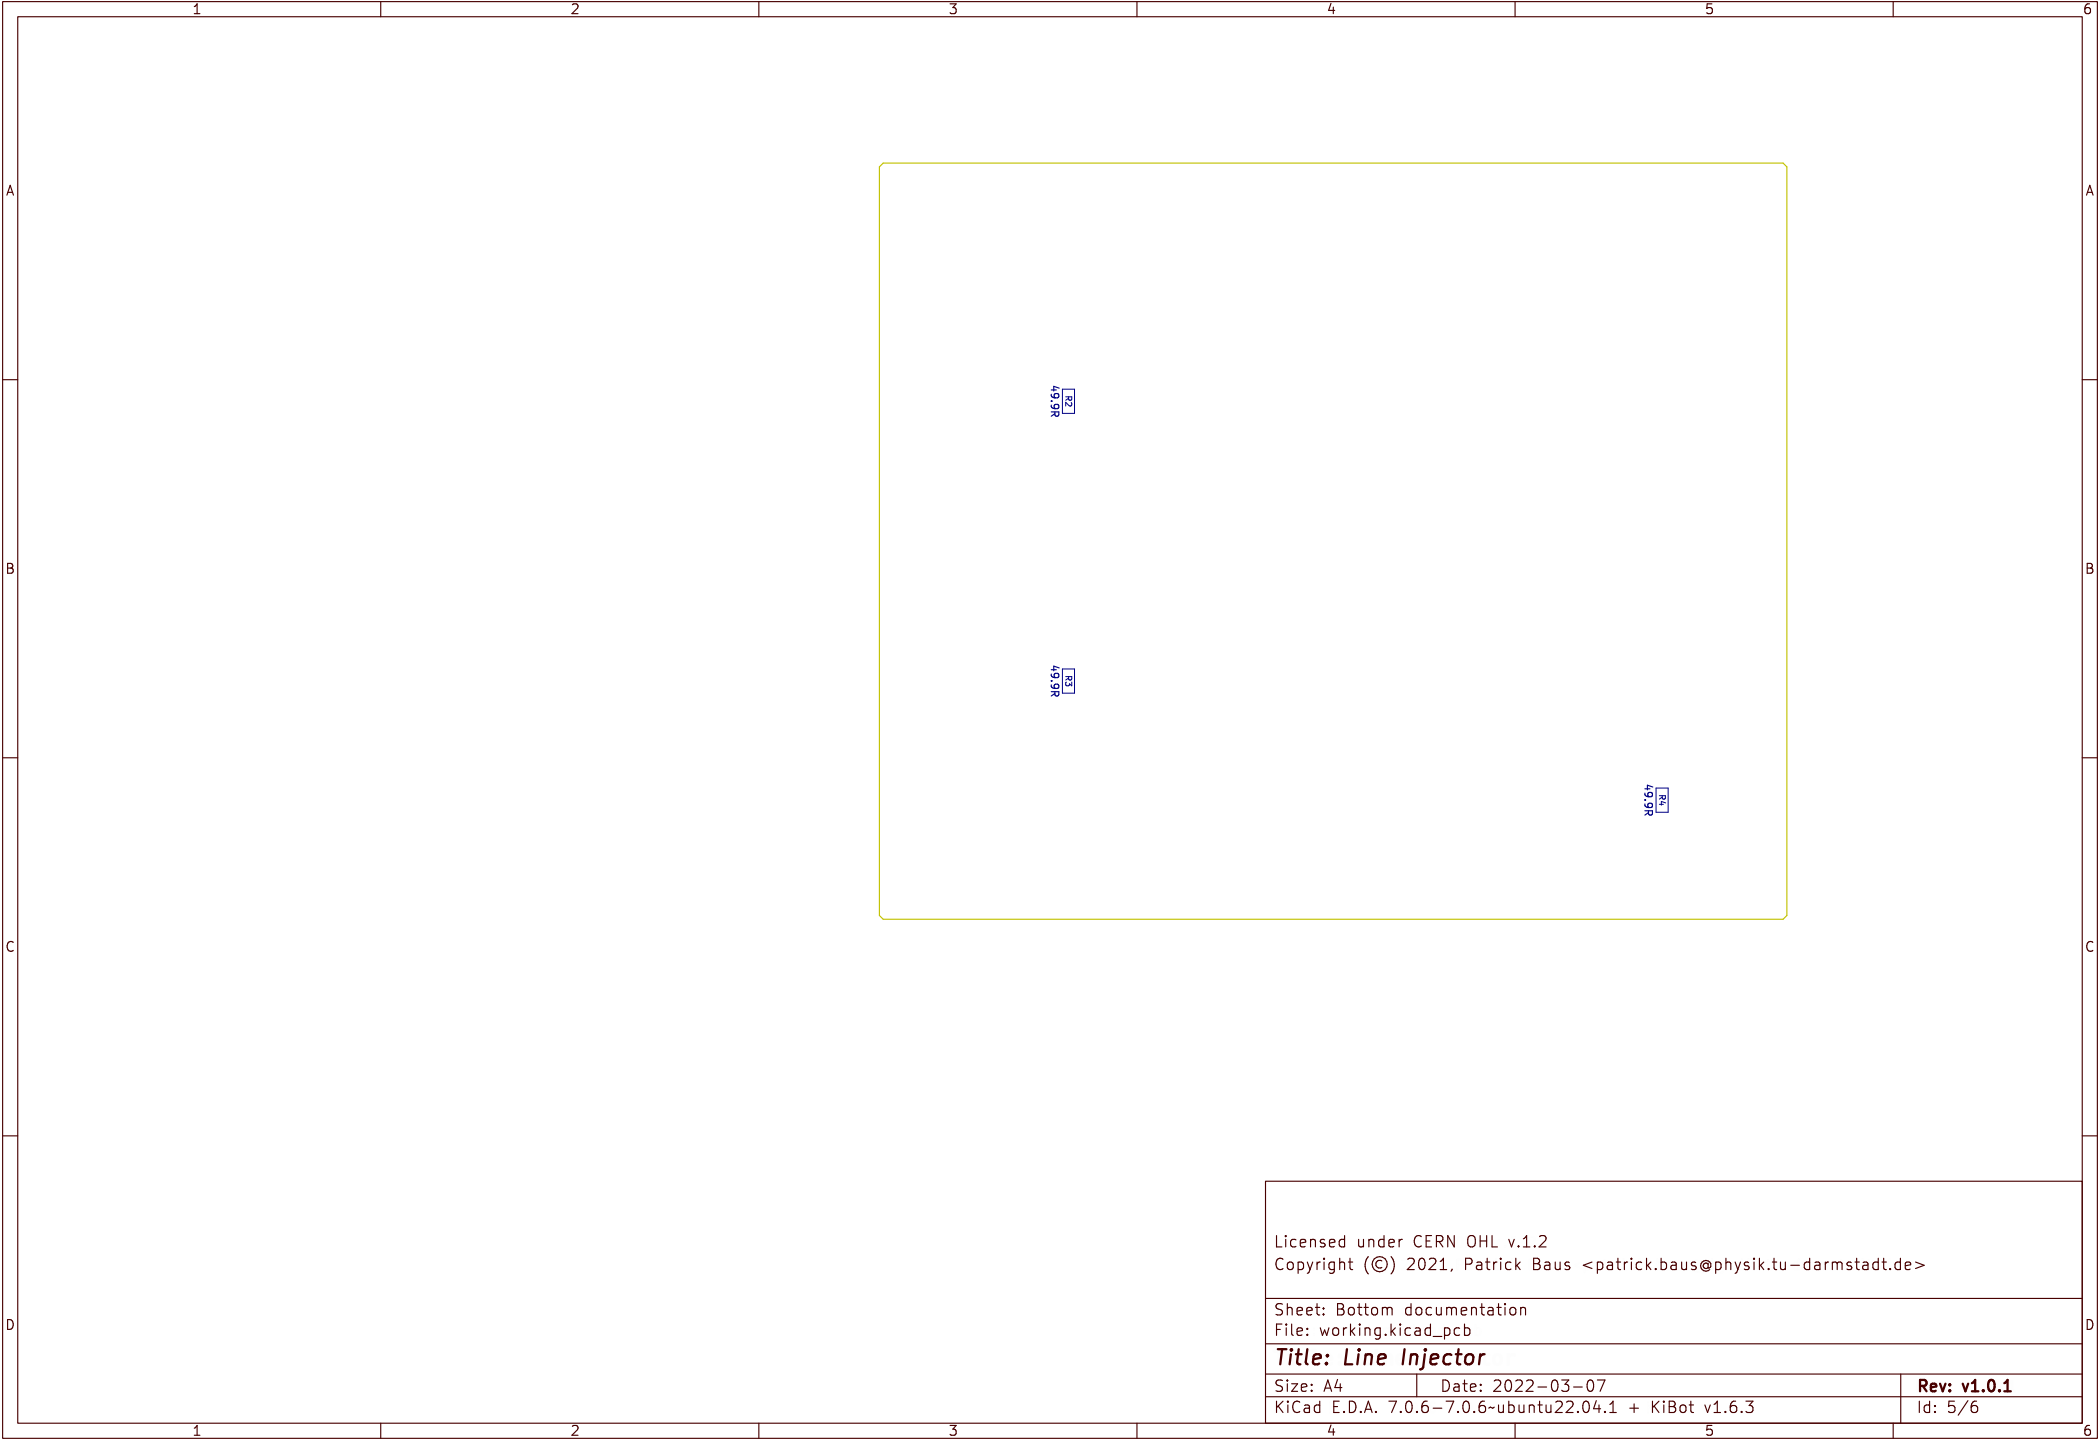

The case is a Hammond Manufacturing 1457N1201EBK

- Manufacturing Instruction:
- Material FR-4
 - Finished thickness: 1.57 mm $\pm$ 0.13 mm
 - Surface finish: ENIG
 - Solder mask color: Blue (preferred) or green (if the parameters require it)
 - PCBs are to be RoHS compliant
 - Do not edit artwork, e.g. to add logos or order numbers
 - Clean to meet IPC J-STD-001E, Class 2 after assembly

Stackup:

Material	Thickness
Copper	35 μ m
Core	1.5 mm
Copper	35 μ m

Press the connectors down firmly when soldering to ensure they are at the proper height.

The 4mm jack is 0.8 mm above the PCB.
(Confirm by inspection)
Its center pin is 6.3 mm above the PCB.

The center pin is 8,5 mm above the PCB.

Remember: Add thermal compound or a thermal pad between the MOSFET and the heatsink

Licensed under CERN OHL v.1.2
Copyright (©) 2021, Patrick Baus <patrick.baus@physik.tu-darmstadt.de>

Sheet: Front documentation
File: working.kicad_pcb

Title: Line Injector

Size: A4	Date: 2022-03-07	Rev: v1.0.1
KiCad E.D.A. 7.0.6-7.0.6-ubuntu22.04.1 + KiBot v1.6.3		Id: 6/6