



Audio Amp


C3: Use 1uF to filter high frequency noise,
or 10uF if lower frequency noise is present

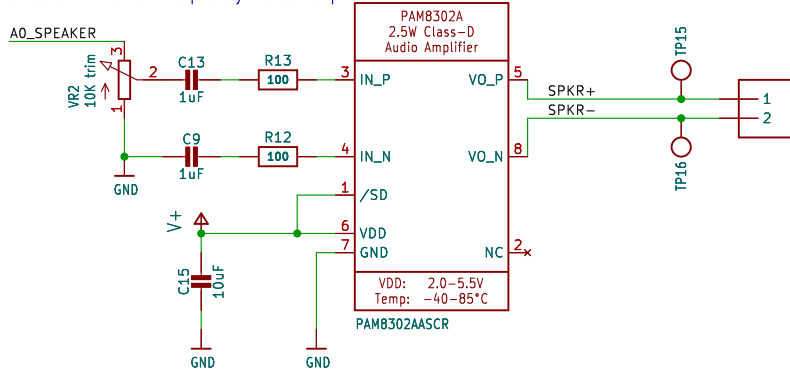



Backlight



JST Connectors

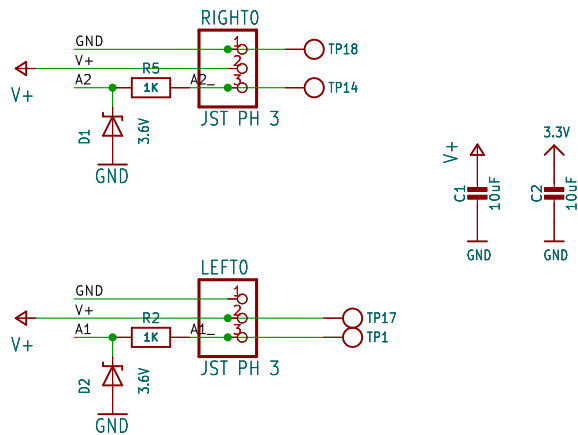


Reset

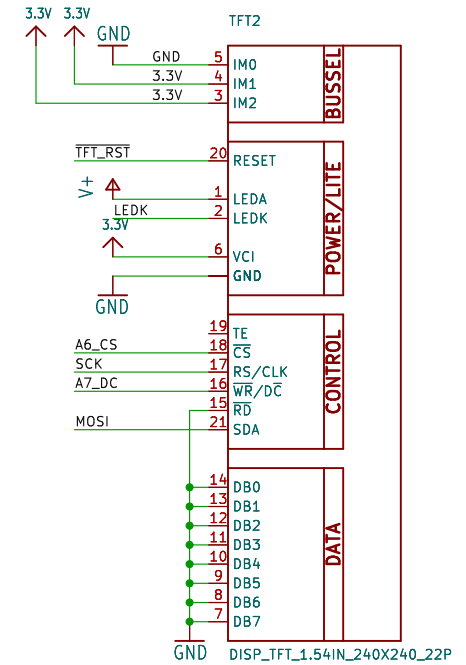

Capacitive Touch/I/O Pads



Test Points



\${PROJECTNAME} CC 2.5 BY-SA
 \${CURRENT_DATE} Sheet: \${#}/\${##}
 Drawing: \${AUTHOR} Adafruit Industries

Sheet: /
 File: working-kicad-5.sh
 Title: Size: User Date: Rev:
 KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1 Id: 1/1