




Voltage Regulator

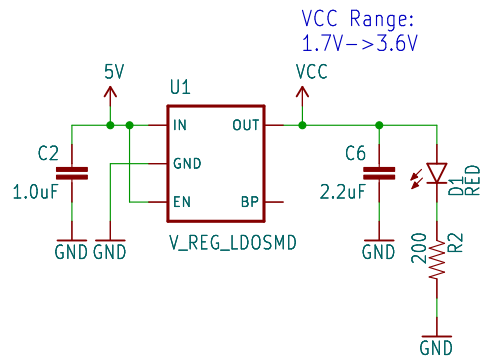


UART Level Shift & Select

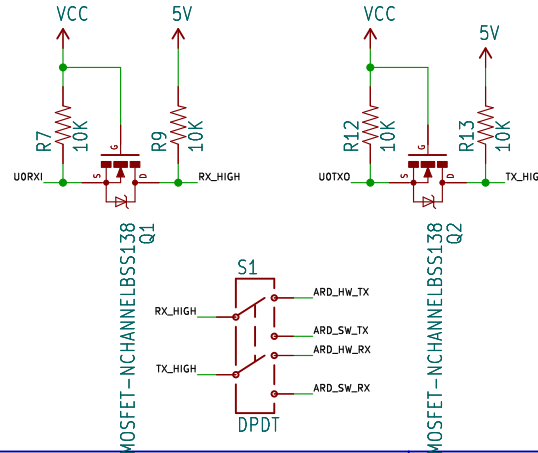


Arduino Shield

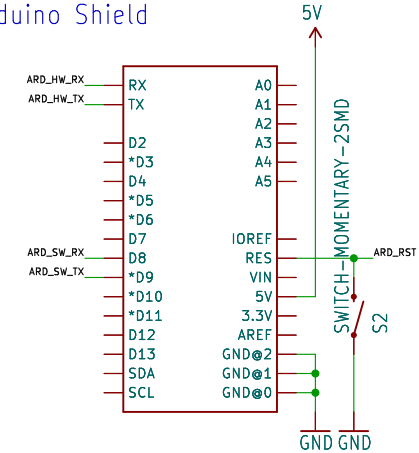


ESP8266 & 4 Mbit Flash

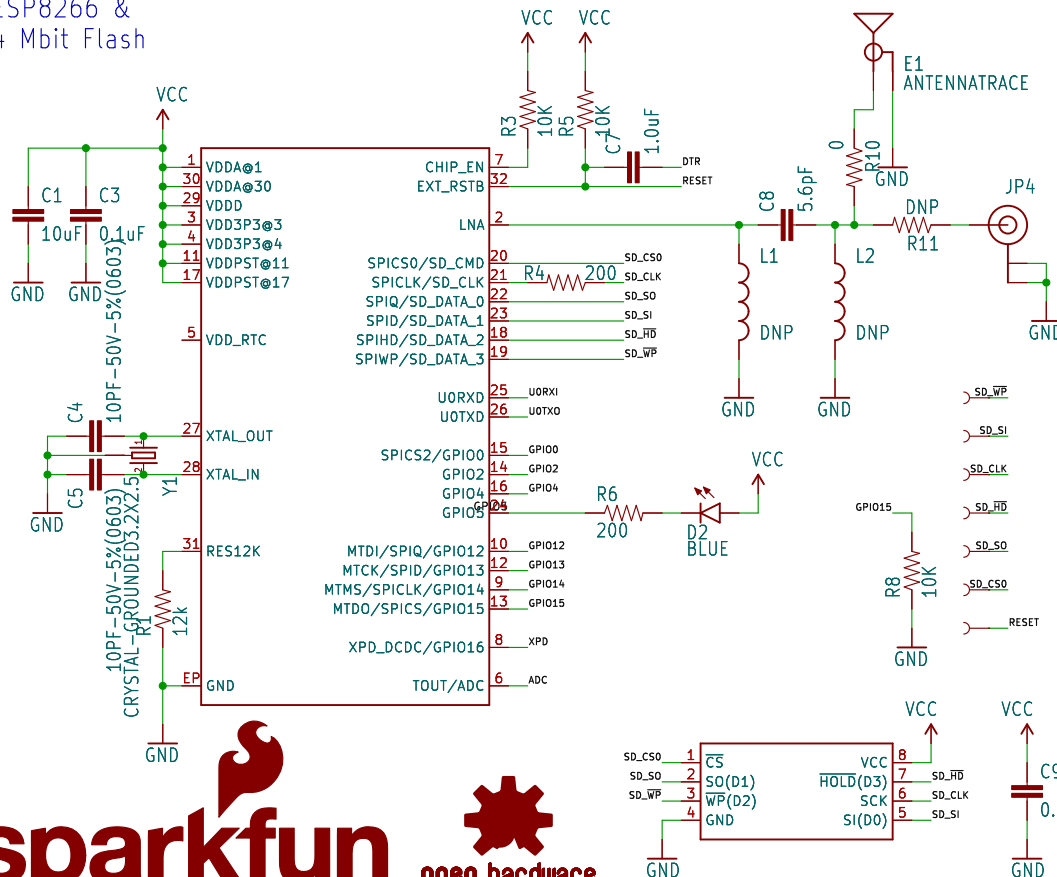

ESP8266 I/O Headers

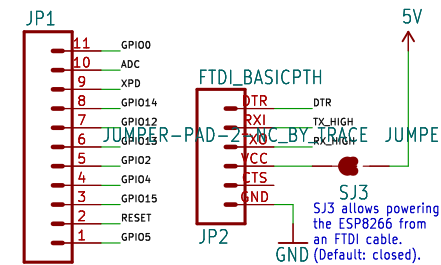


Arduino Reset



Auto-Programming Mode

SJ1 and SJ2 allow auto-control of GPIO0 for programming. Disconnecting may be required to use serial terminal debugging.



Released under the Creative Commons

Attribution Share-Alike 4.0 License

<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by:

Jim Lindblom

REV:
v10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User

Date:

Rev:

KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Id: 1/1

