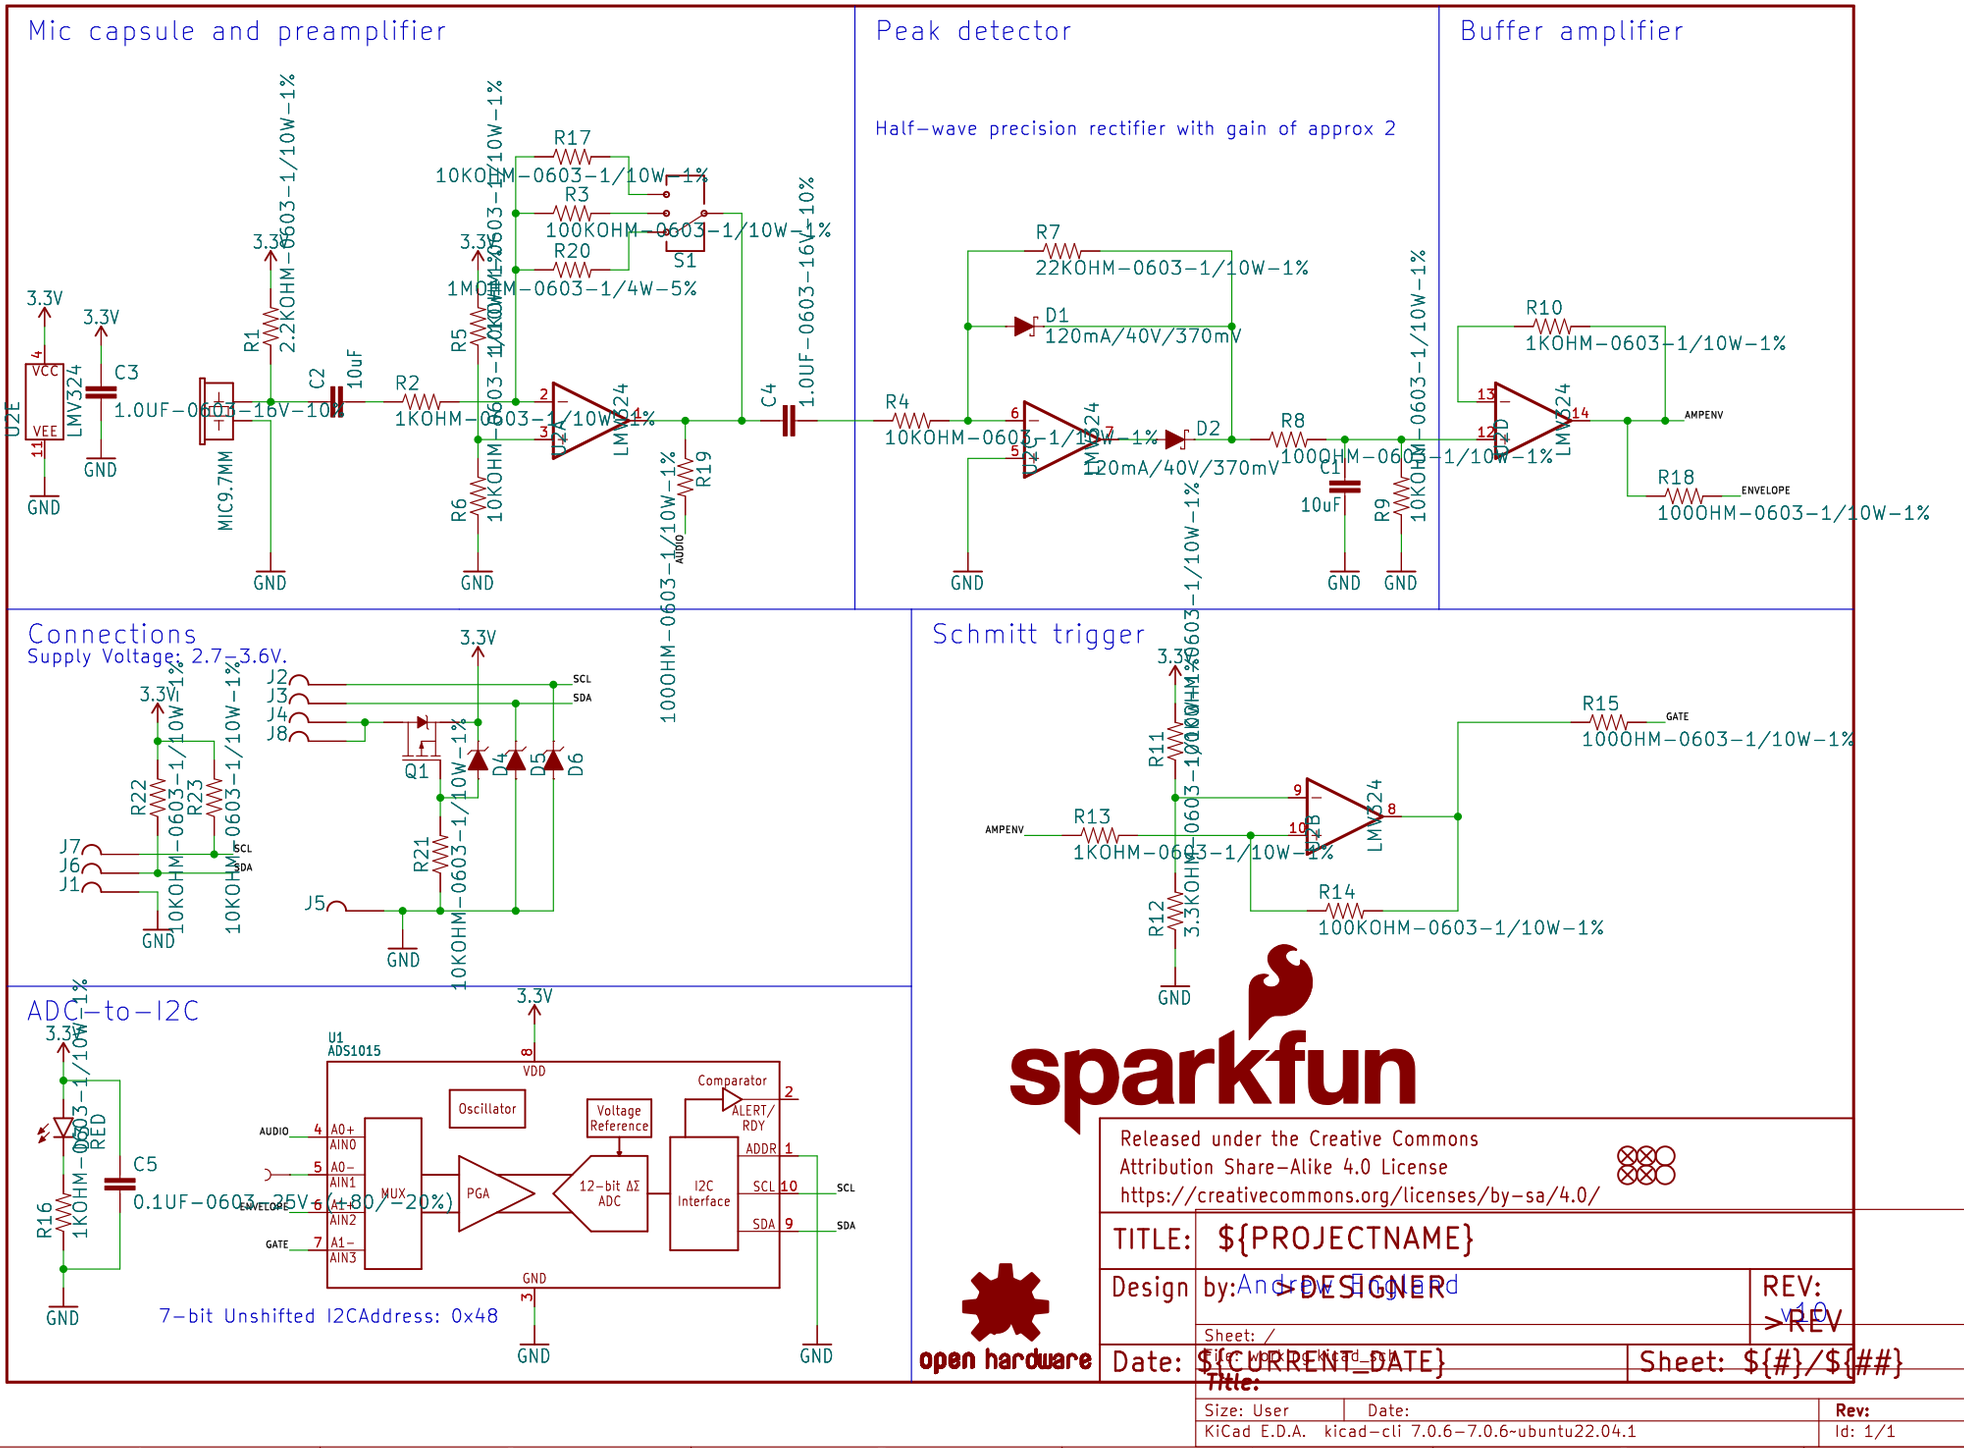

Mic capsule and preamplifier
Peak detector
Half-wave precision rectifier with gain of approx 2
Buffer amplifier
Connections
Supply Voltage: 2.7-3.6V.
Schmitt trigger
ADC-to-I2C
7-bit Unshifted I2CAddress: 0x48
sparkfun
Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
TITLE: ${PROJECTNAME}
Design by: >DESIGNER
REV: >REV
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
open hardware
Size: User
Date:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Rev:
Id: 1/1