


Molex Molded




Part: Molex 1462350001
Gain: 1.4dBi
Center: 1.575GHz
Antenna Type: LDS

PulseLarsen W3011

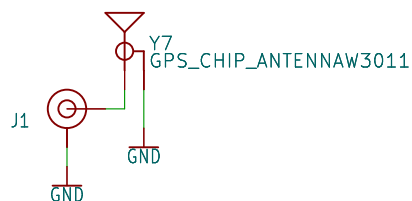


Part: PulseLarsen W3011
Gain: 3.4dBi
Center: 1.575GHz
Antenna Type: Chip

PulseLarsen W3062A

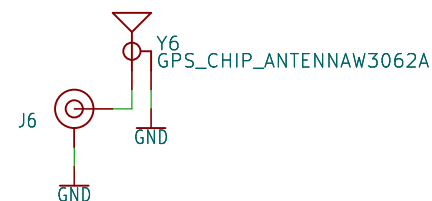


Part: PulseLarsen W3062A
Gain: 2.5dBi
Center: 1.575GHz
Range: 1.565 – 1.585GHz
Antenna Type: Chip

TE Puck

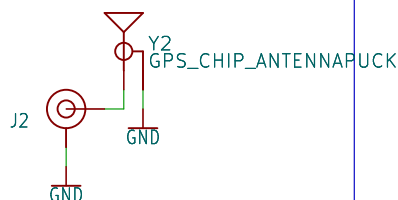


Part: TE 1513634-1
Gain: 0dBi
Center: 1.575GHz
Range: 1.565 – 1.585GHz
Antenna Type: Raised Puck

Molex Cube

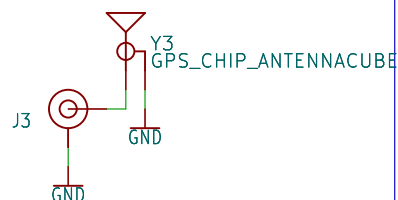

Part: Molex 1462160001
Gain: 1dBi
Center: 1.575GHz
Antenna Type: PIFA

Molex Chip

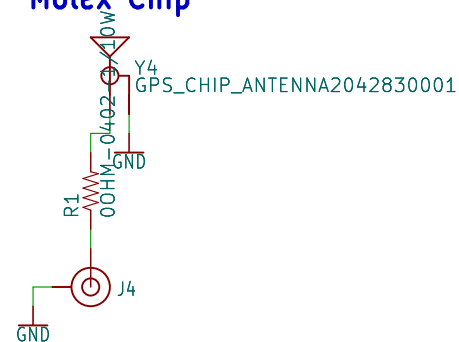

Part: Molex 2042830001
Gain: 2dBi
Center: 1.575GHz
Range: 1.561 – 1.602GHz
Antenna Type: Loop



open hardware

GNSS L1 Frequencies

GPS: 1.575GHz
GLONASS: 1.598-1.609GHz
Galileo: 1.575GHz
BeiDou: 1.561 / 1.575GHz

Microstrip Calculation:

Copper Thickness (1oz): 1.4mil/0.035mm
Board thickness: 0.8mm
Dielectric thickness: 0.73mm
Er: 4.58
Polygon Isolation: 8mil/0.2032mm
RF Trace Width: 34.6mil/0.88mm
<https://chemandy.com/calculators/coplanar-waveguide-wltb-ground-calculator.htm>

Released under the Creative Commons

Attribution Share-Alike 4.0 License

<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: >DESIGNER

REV: >REV

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User

Date:

Rev:

KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Id: 1/1