




128Mb Flash

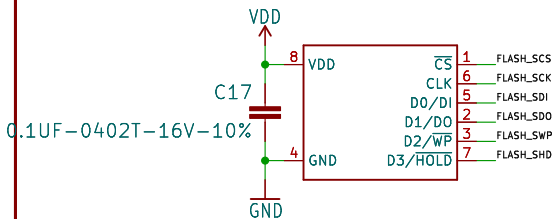


32.768kHz RTC Cryst

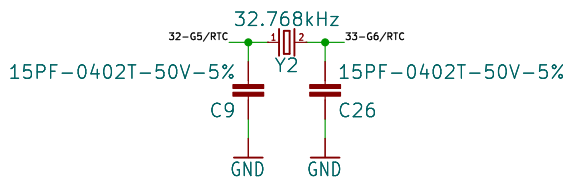


MicroMod Connector

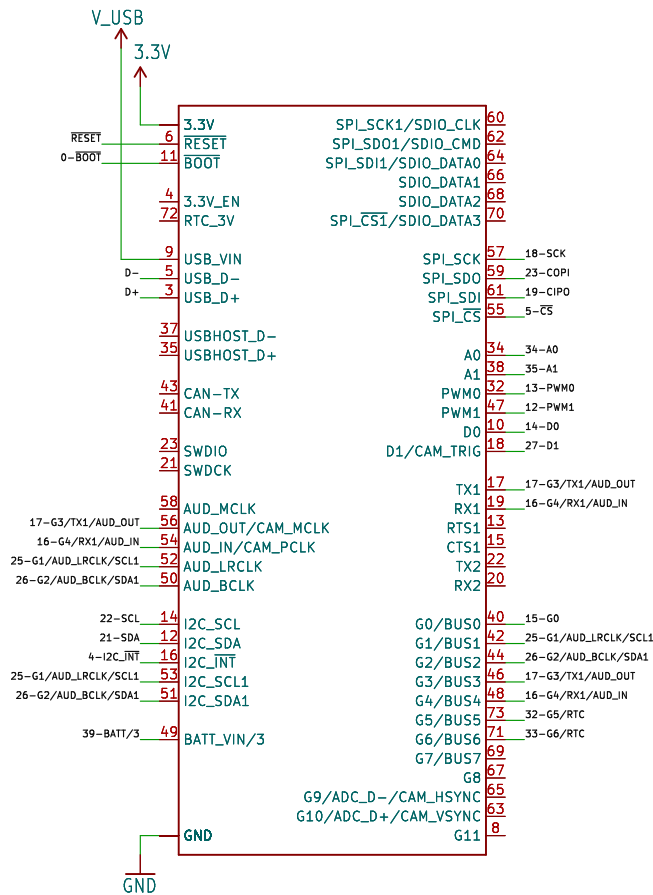

CP2104/2N (USB-to-Serial Converter)

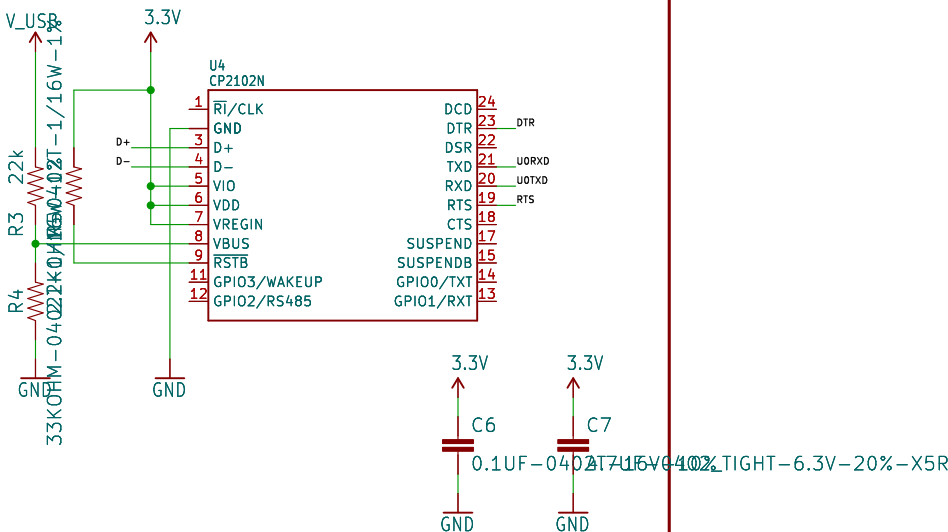

Espressif ESP32

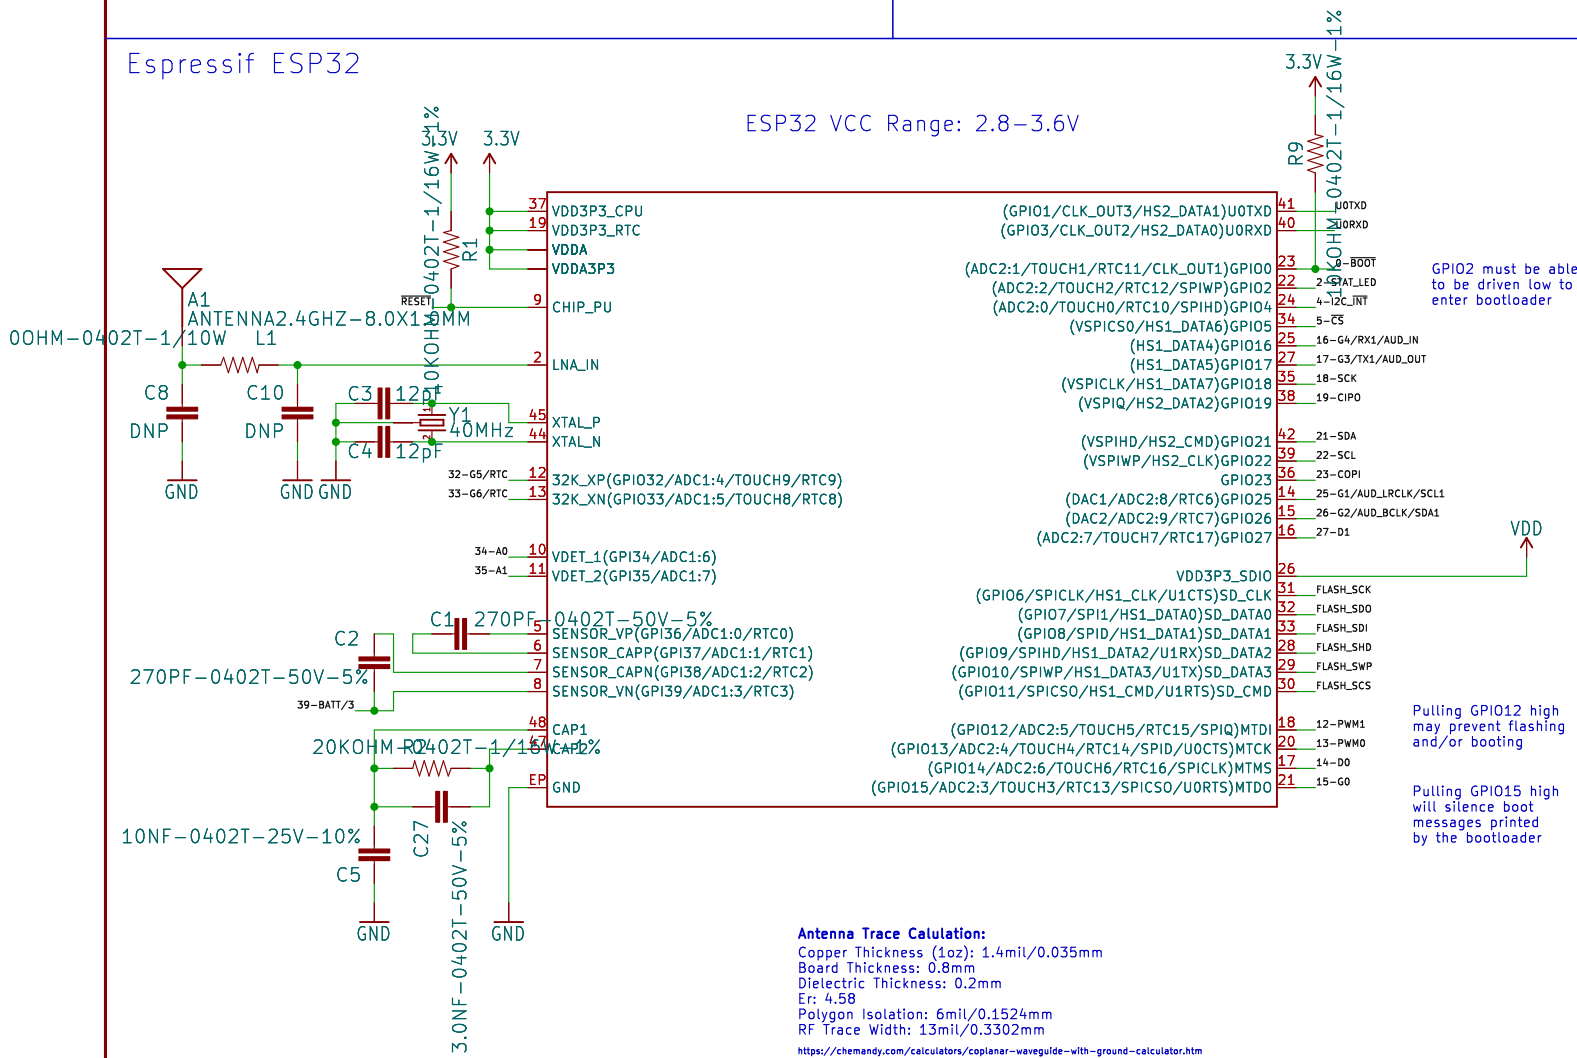


Antenna Trace Calculation:
Copper Thickness (1oz): 1.4mil/0.035mm
Board Thickness: 0.8mm
Dielectric Thickness: 0.2mm
Er: 4.58
Polygon Isolation: 6mil/0.1524mm
RF Trace Width: 13mil/0.3302mm
<https://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm>

Auto-Reset

Pin	Default	Boot	Download
GPIO0	1	1	0
U0TXD	1	1	x
GPIO2	0	x	0
GPIO4	0	x	x
MTDO	1	x	x
GPIO5	1	1	x

If U0TXD, GPIO2, GPIO5 are floating, GPIO0 determines boot mode

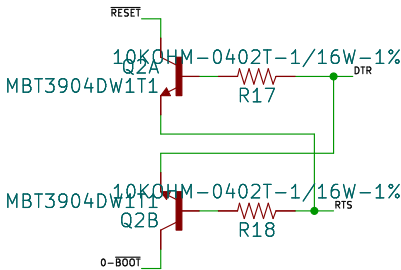

If DTR is LOW, toggling RTS from HIGH to LOW resets to run mode.
If RTS is HIGH, toggling DTR from LOW to HIGH resets to bootloader.

Status LED



Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}
Design by: >DESIGNER
Date: \${CURRENT_DATE} Sheet: \${#}/\${##}

Sheet: /
working.kicad_sch
Title:
Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1

