



Raspberry Pi RP2040

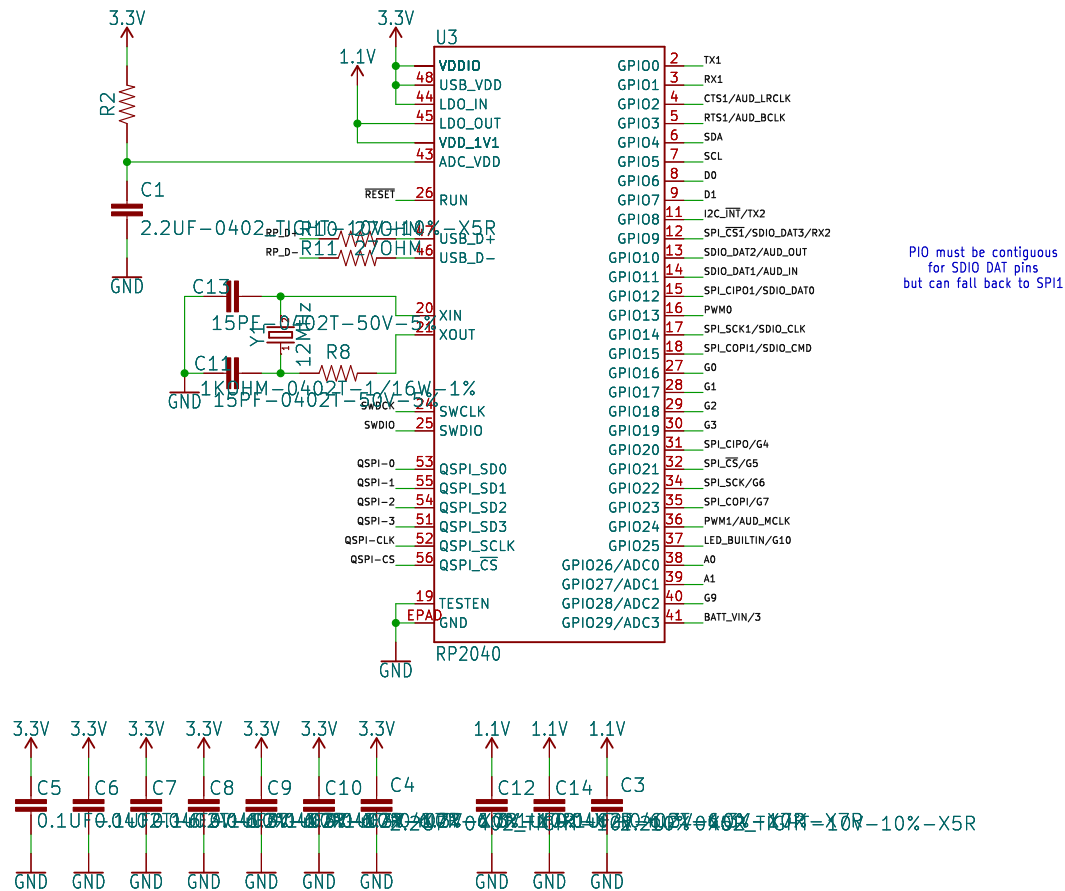


0.3uA Leakage
0.280V drop at 1mA
MicroMod Connector

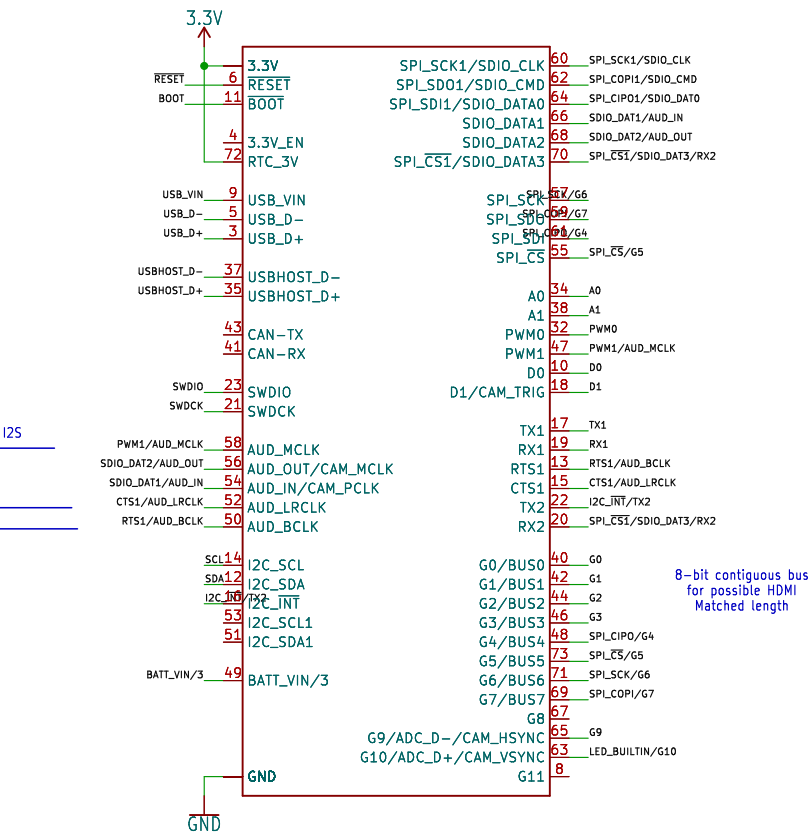


Differential Microstrip Calculation:

Single Ended Impedance: 50Ω
Differential Impedance: 100Ω
Trace Thickness (1oz): 1.4mil/0.035mm
Dielectric thickness (layer 1 to 2): 3.93mil/0.1mm
Er: 4.6 (JLC7628)
Board thickness: 0.8mm
Required Trace Width: 5mil
Required Trace Separation: 4mil
<https://calc3pcba.com/ImpedanceCalculation>


Status LED



16MB Flash

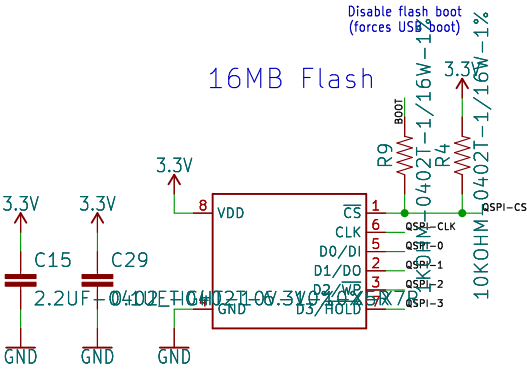

USB Mux

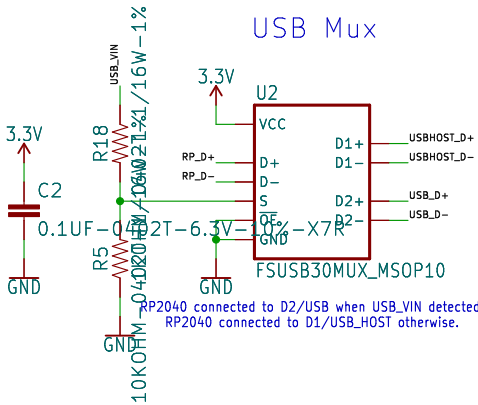

Special Instructions		
Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		
TITLE: \${PROJECTNAME}		
Design by: N. S. DESIGNER		REV: v0.7
Date: \${CURRENT_DATE}		Sheet: \${#}/\$10
Size: User Date: Rev: KiCad E.D.A. eeschema 7.0.6 Id: 1/1		