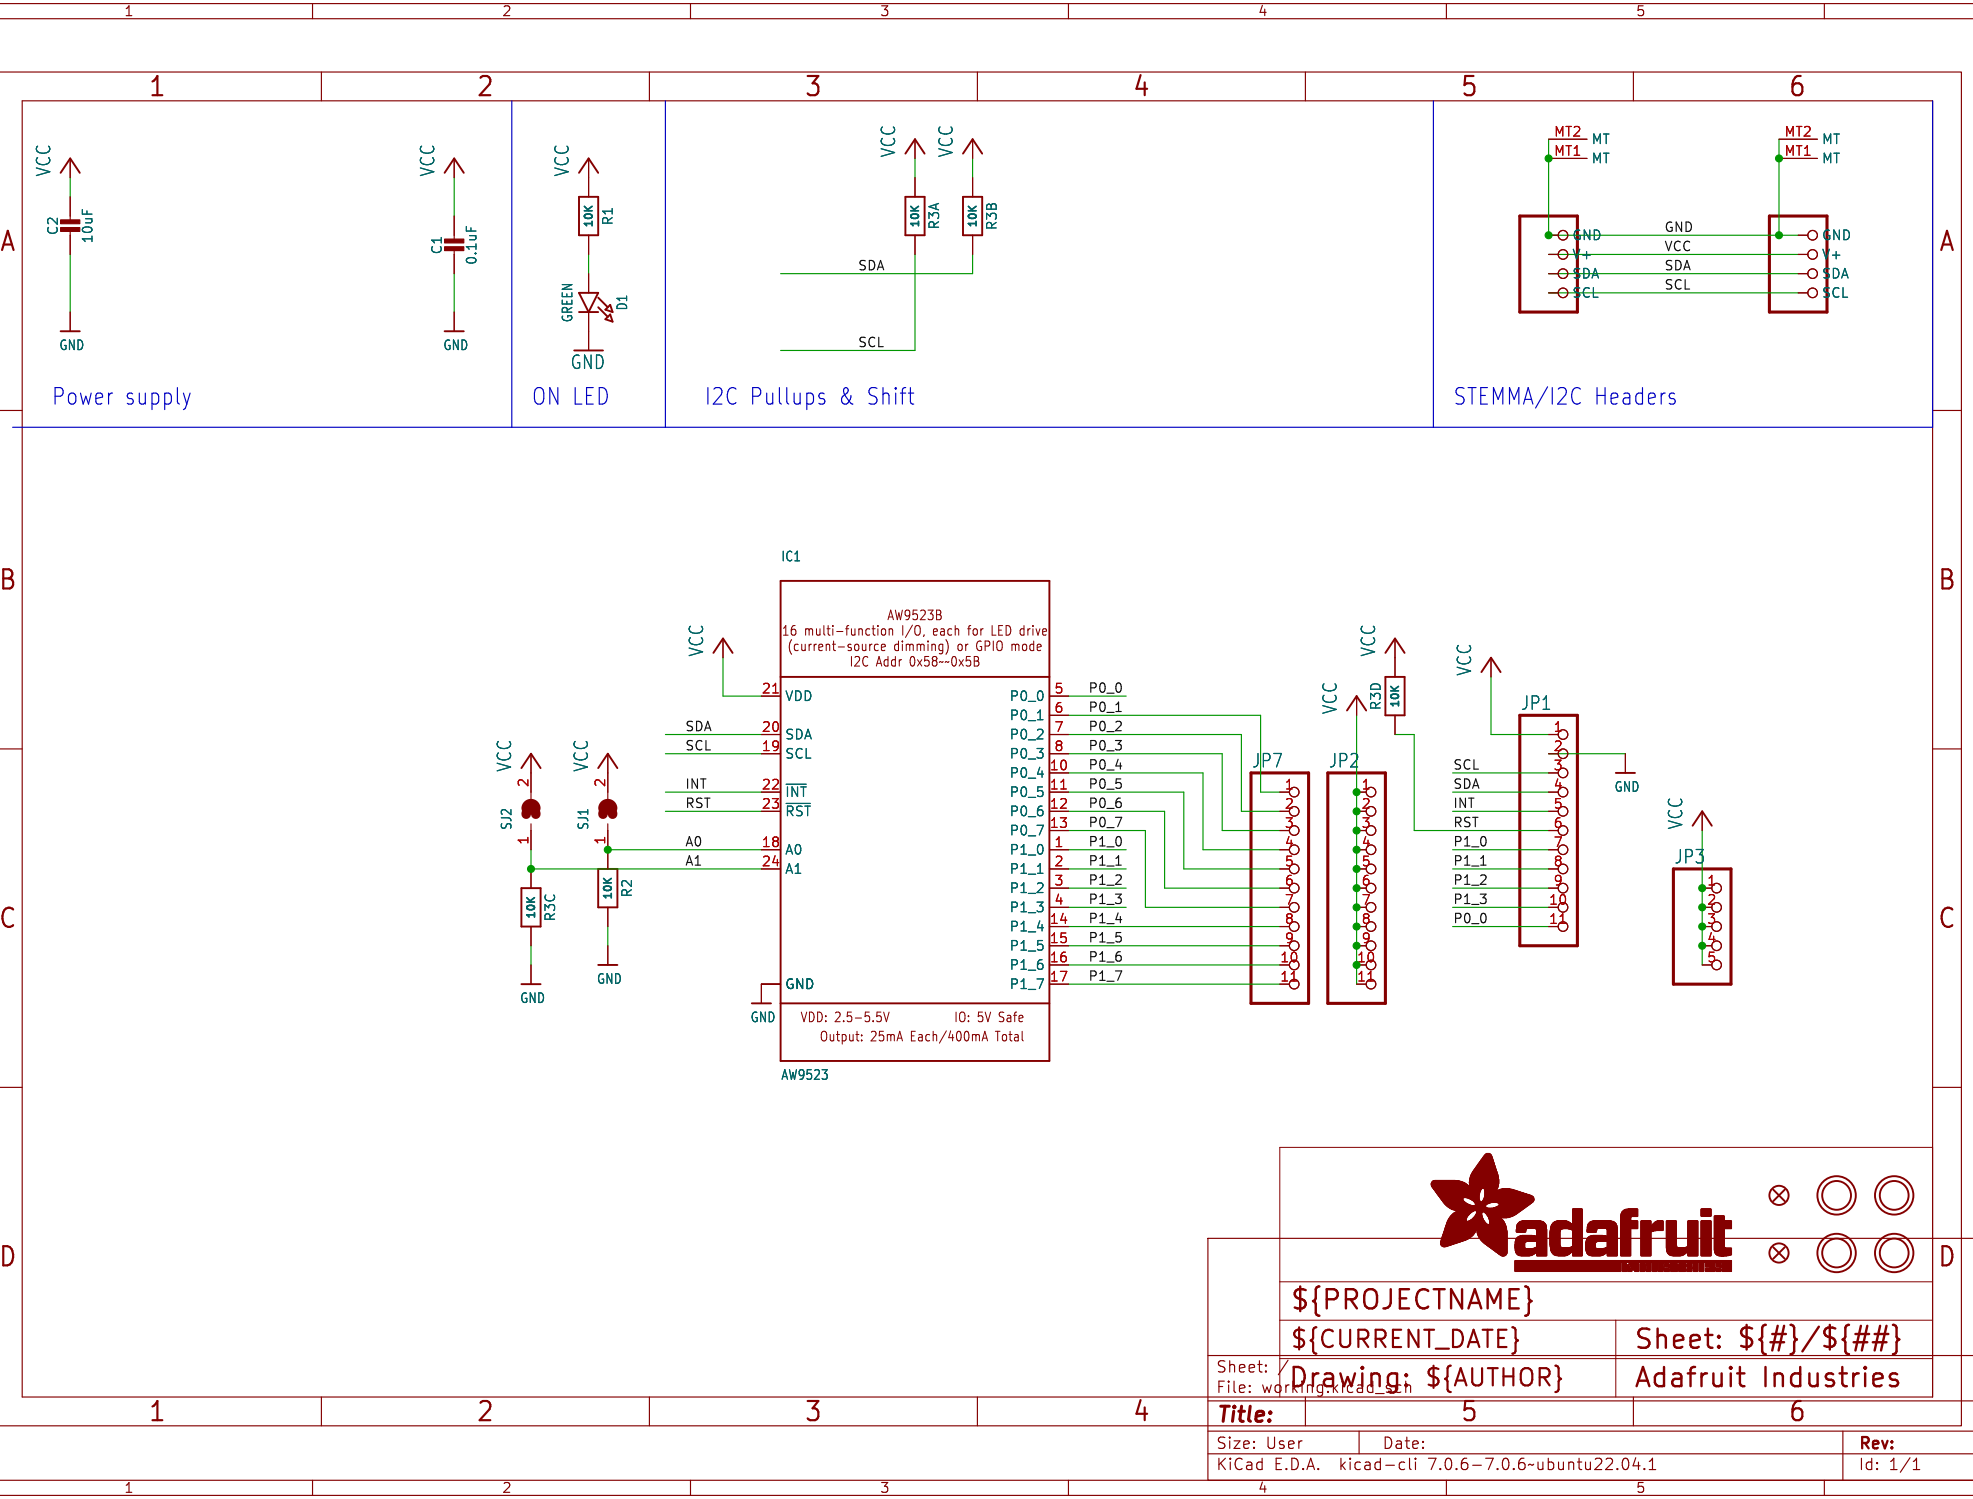
Power supply
ON LED
I2C Pullups & Shift
STEMMA/I2C Headers
IC1
AW9523B
16 multi-function I/O, each for LED drive
(current-source dimming) or GPIO mode
I2C Addr 0x58~0x5B
VDD: 2.5~5.5V
IO: 5V Safe
Output: 25mA Each/400mA Total
AW9523
JP1
JP2
JP3
JP7
${PROJECTNAME}
${CURRENT_DATE}
Sheet: ${#}/${##}
Drawing: ${AUTHOR}
Adafruit Industries
Title:
Size: User
Date:
Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Id: 1/1