
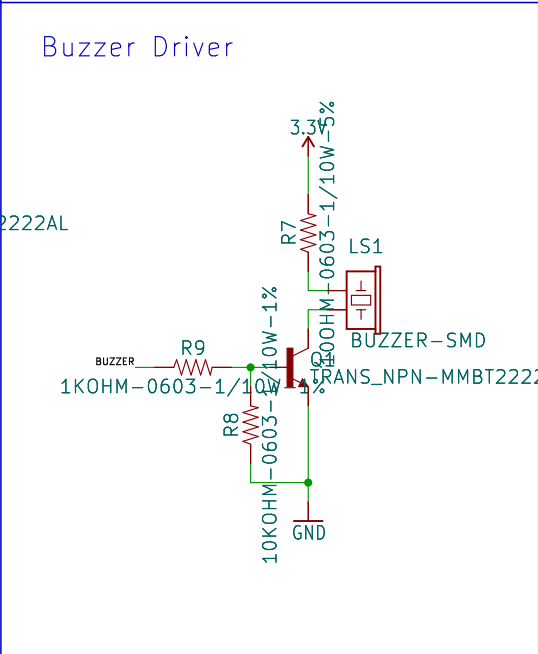


3.3V Regulation


The diagram shows an AP2112 voltage regulator (U1) configured for 3.3V regulation. The input (IN) is connected to a 5V source through capacitor C1 (1.0UF-0603). The enable pin (EN) is connected to GND. The output (OUT) is connected to a 3.3V output through capacitor C2 (1.0UF-0603). The feedback pin (FB) is connected to the output through a 10% resistor. The chip is labeled U1 and AP2112.

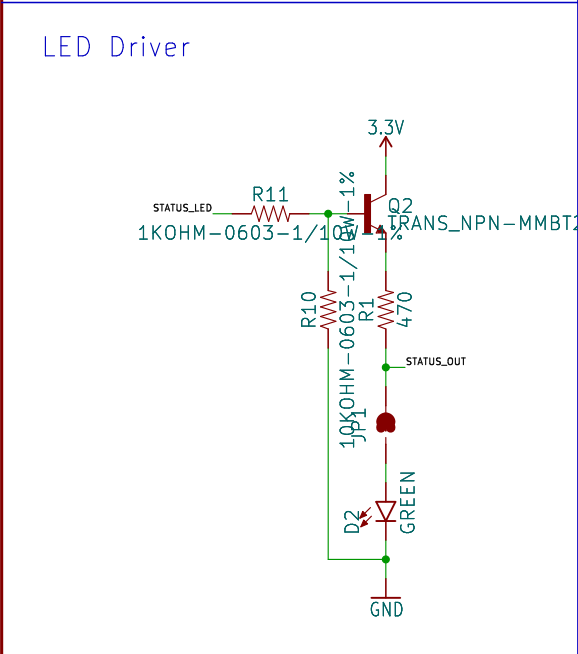

Pin Header

The diagram shows a 6-pin header labeled J4. The pins are numbered 1 through 6 from bottom to top. The connections are as follows:

- Pin 6: 3.3V
- Pin 5: RXI
- Pin 4: TXD
- Pin 3: GND
- Pin 2: SCAN_TRIGGER
- Pin 1: STATUS_OUT

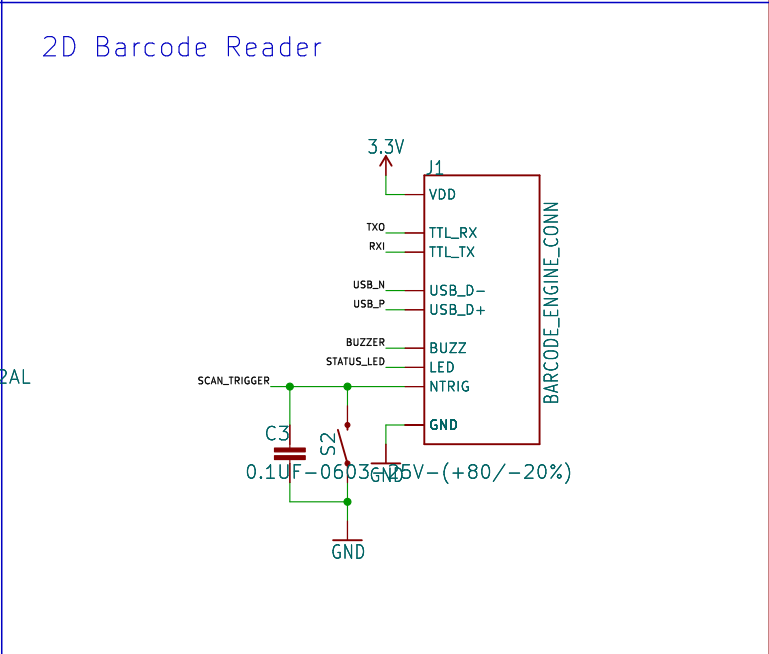

TITLE: \${PROJECTNAME}		
Design by: \${DESIGNER}		REV: \${REV}
Sheet: /		
Date: \${CURRENT_DATE}	Sheet: \${#}/\${#}	
Title:		
Size: User	Date:	Rev:
KiCad E.D.A.	kiCad-cli 7.0.6-7.0.6-ubuntu22.04.1	Id: 1