


ACS723LLCTR-05AB-T2



NOTES:
-VCC: 4.5V-5.5V
-Current Range: +/-5A

Bandwidth Select

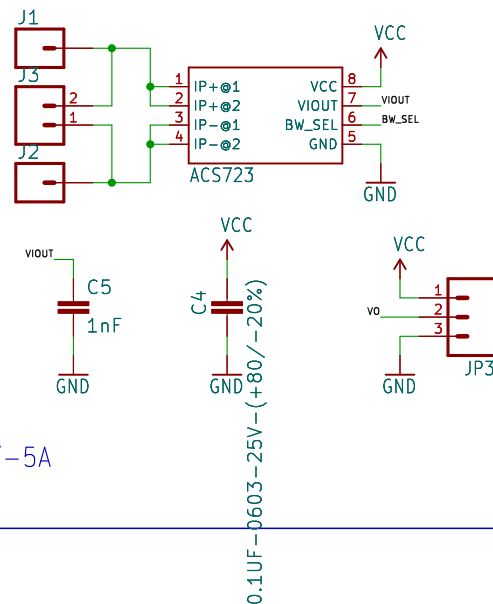


JP1 (Sets bandwidth):
OPEN = 20kHz Low Noise (default)
CLOSED = 80kHz

Opamp

VR1 (GAIN): turns
counter-clockwise
to increase gain
Min Gain: 2x
Max Gain: 22x

VR2 (VREF): turns
clockwise to increase
output reference voltage

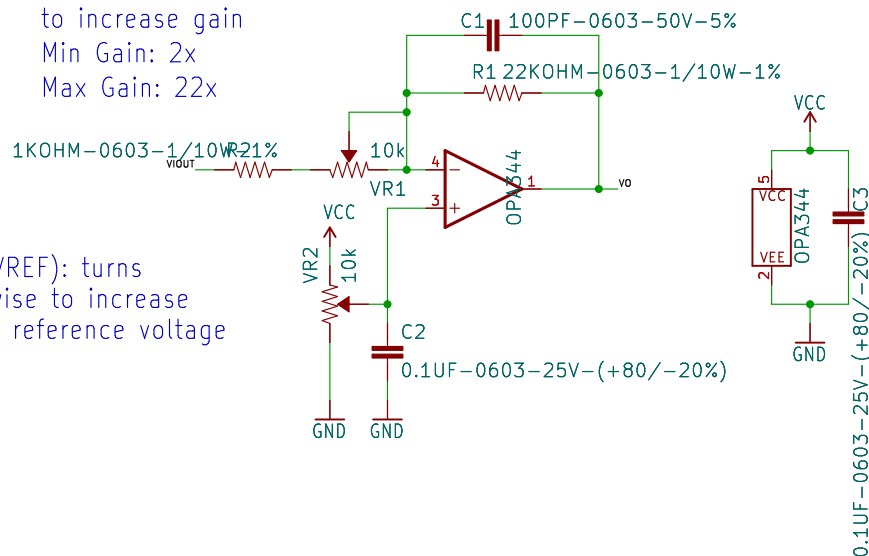

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Pete Dokter
Revised by: Eric Orosel

REV:
v10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date: KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1 Rev: Id: 1/1