



3.3V Voltage Regulator

Input supplied by Arduino 5V

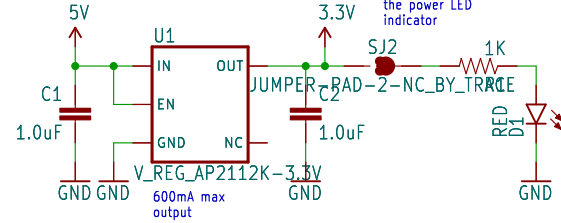


GPS Module

GP3906 VCC Range: 3.3V +/-5%

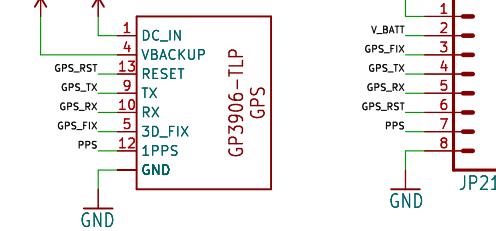


Battery Supply


The MG2639 requires some form of voltage supply on its VBACKUP input. V_BATT Range: 2.0V-4.3V

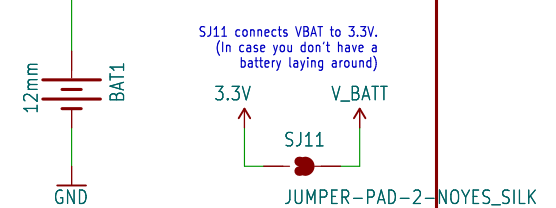

Arduino Shield

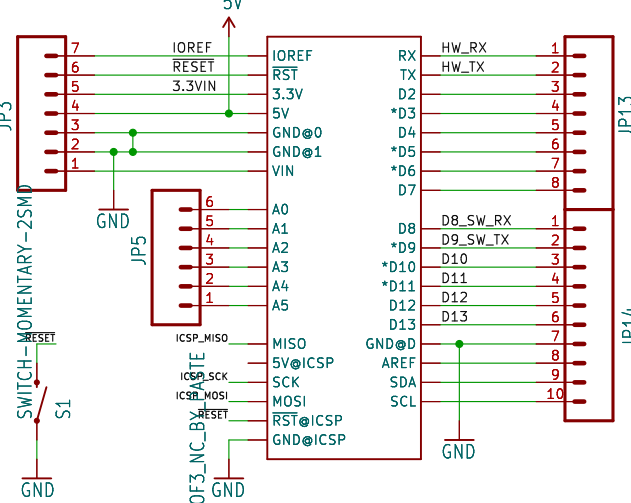


µSD Socket

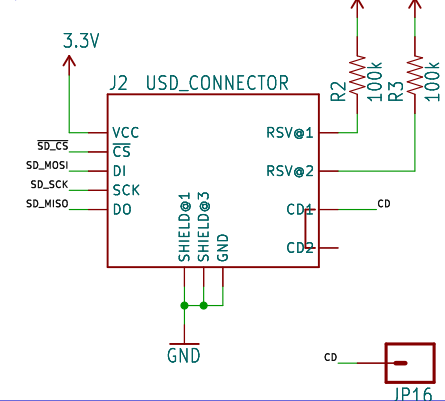


Level Shifting

IOREF should be 3.3V or 5V. If the Arduino doesn't have IOREF, it should be set with SJ3.

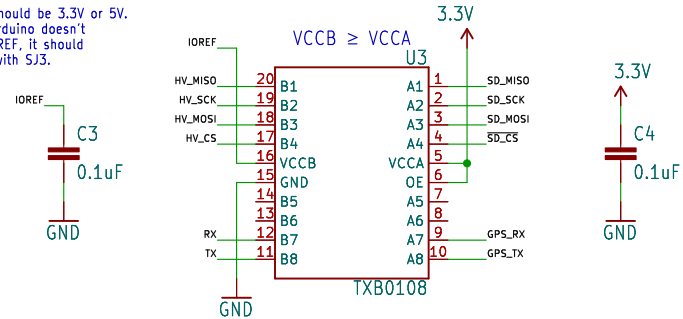

µSD SPI Interface Configuration

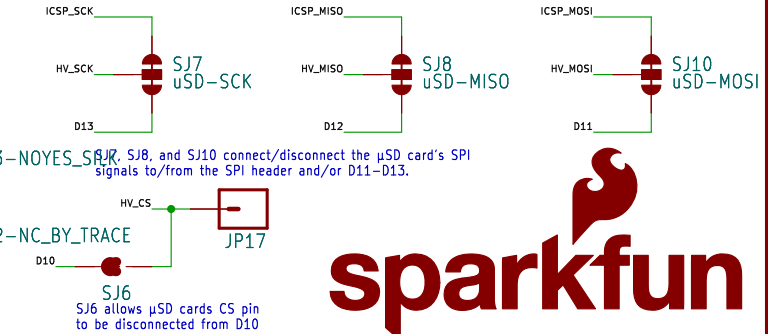

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Jim Lindblom
 Based on a design by: Aaron Weiss

REV: v20

Date: \${CURRENT_DATE}


Sheet: \${#}/\${##}

Size: User Date: KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev: Id: 1/1


IOREF Select

SJ3 selects the IOREF voltage. (Only required for Arduino's with no IOREF signal.)



Serial Switch

SJ4 and SJ5 connect/disconnect GPS RX and TX to/from DB and D9.

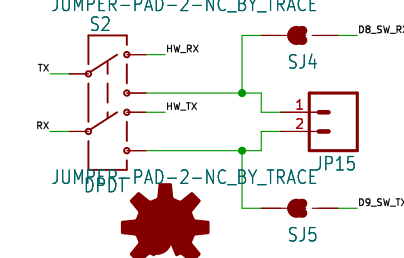

open hardware