



Voltage Regulator

Input Voltage Range:
4.5–16V

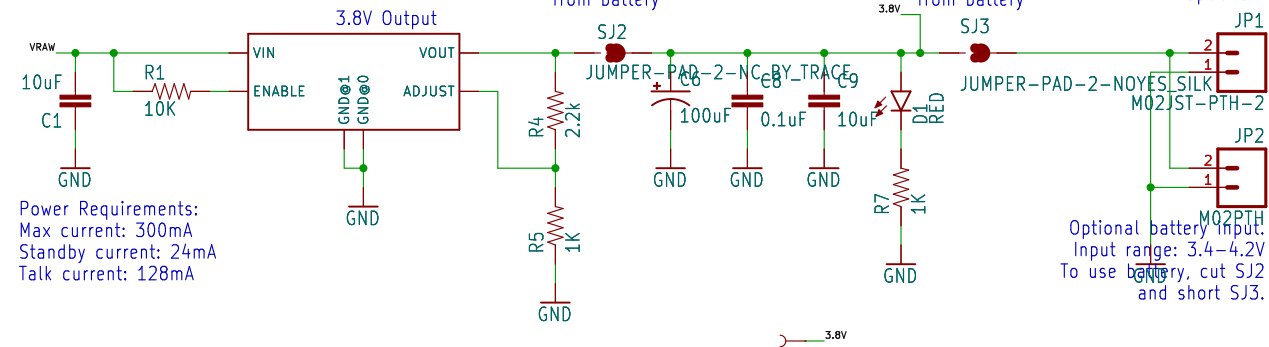


Power Requirements:
Max current: 300mA
Standby current: 24mA
Talk current: 128mA

Level Shifter

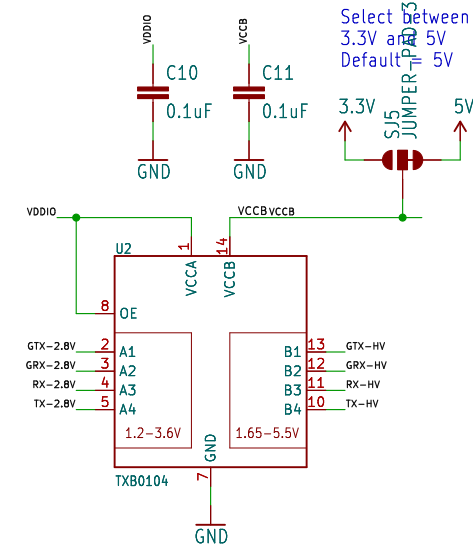


UART Select


Select between hardware UART
and software UART for both GPS
and cellular UART's
Both default to software

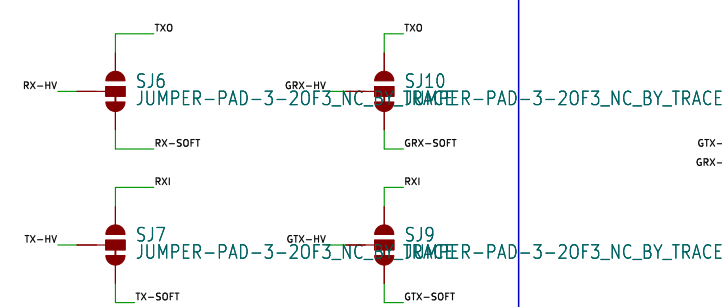

Arduino Shield

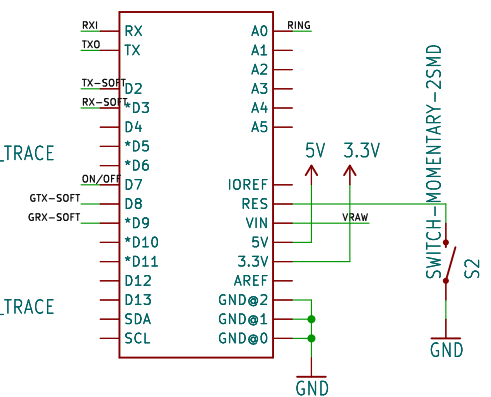


Boot Button

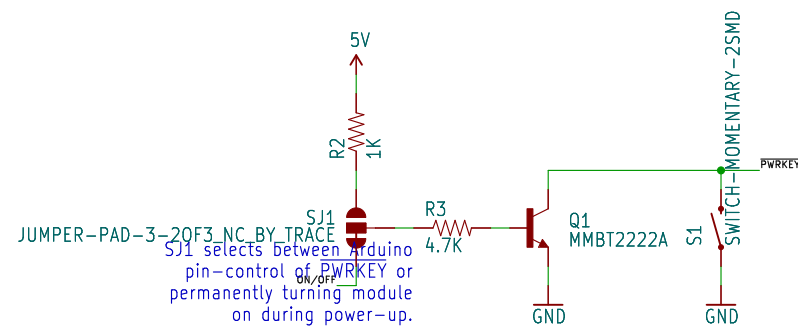


MG2639 Cellular Module


Open SJ4 to disconnect GPS
power from board power.

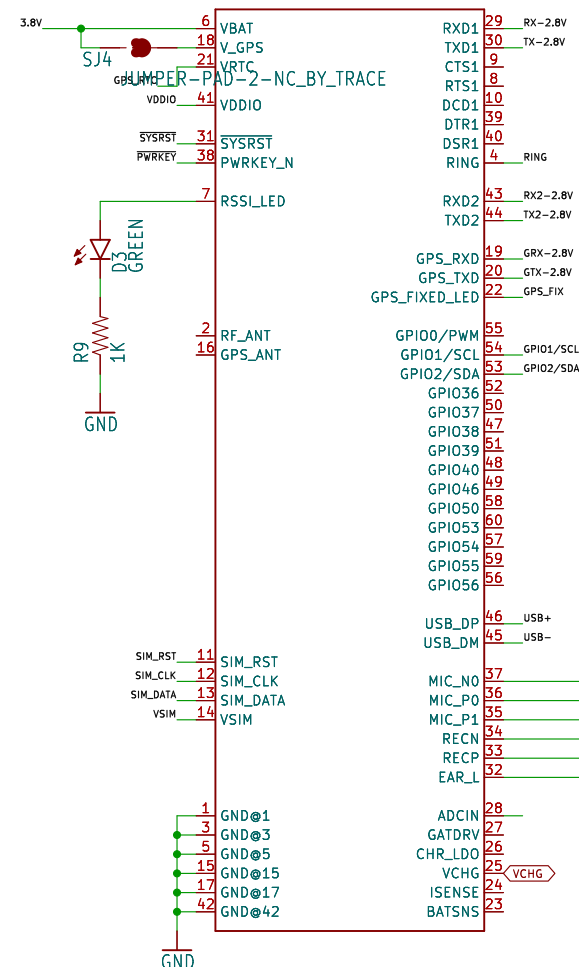

SIM Card

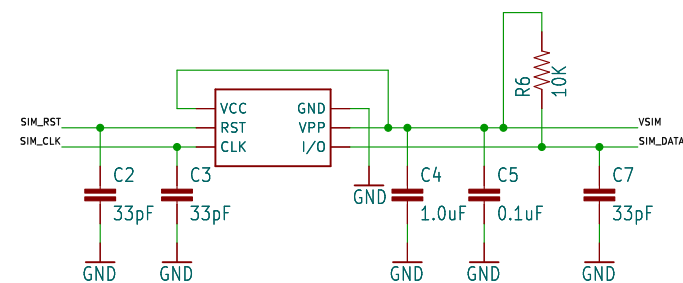


GPS Battery




Misc. Headers


Top-left header breaks out I2C,
UART2, VDDIO, GND and the
cell module's reset pin.



FTDI Header
to debug UART1



USB Header matches
SFE micro & mini-b breakouts



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Nathan Seidle
Jim Lindblom

Rev:
v1.1

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev:
Id: 1/1