



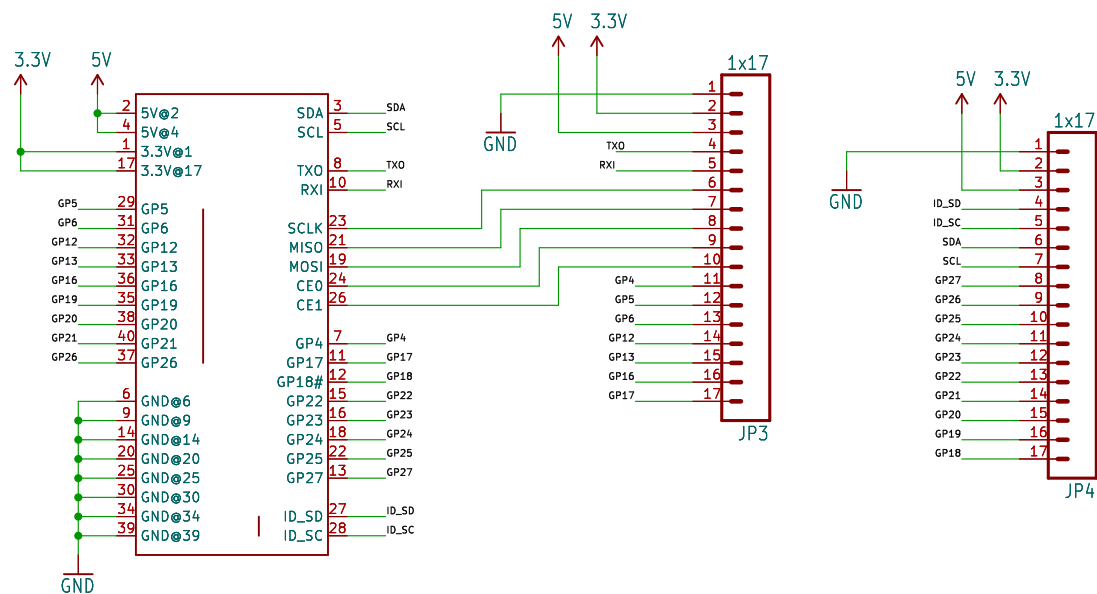

TX0 and RXI use 3.3V logic levels.
Use with 3.3V FTDI adapter.

All logic signals are 3.3V, and not 5V tolerant.
There is no over-voltage protection on the RPi, nor
on the Pi Wedge.

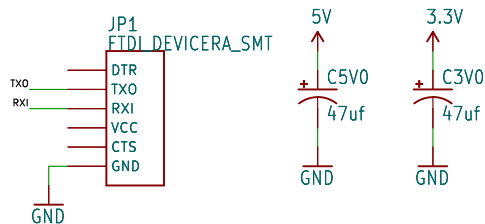

Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/			
TITLE: \${PROJECTNAME}			
Design by: Byron Jacquot		 REV: V10	
Sheet: /		Sheet: \${#}/\${##}	
Date: \${CURRENT_DATE}		Title:	
Size: User	Date:	Rev:	
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1		Id: 1/1	