




Voltage Regulator and Battery Charger

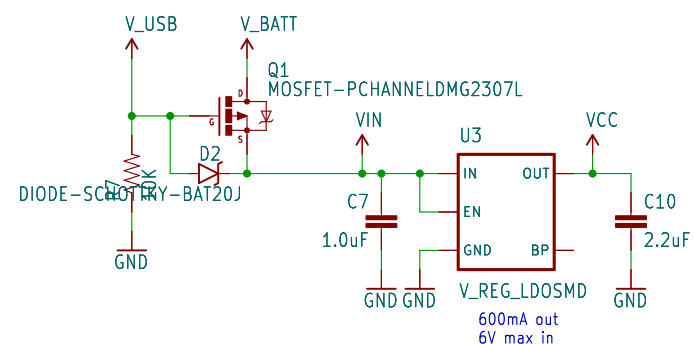


Lithium-Polymer Battery Charger (1-cell)

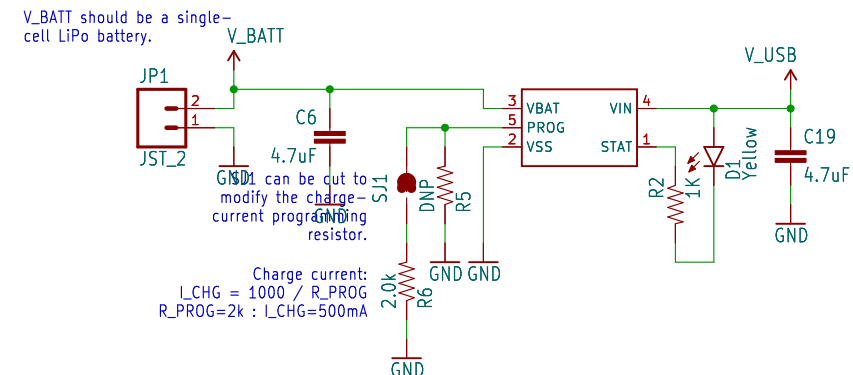


FT231XS (USB-to-Serial Converter)

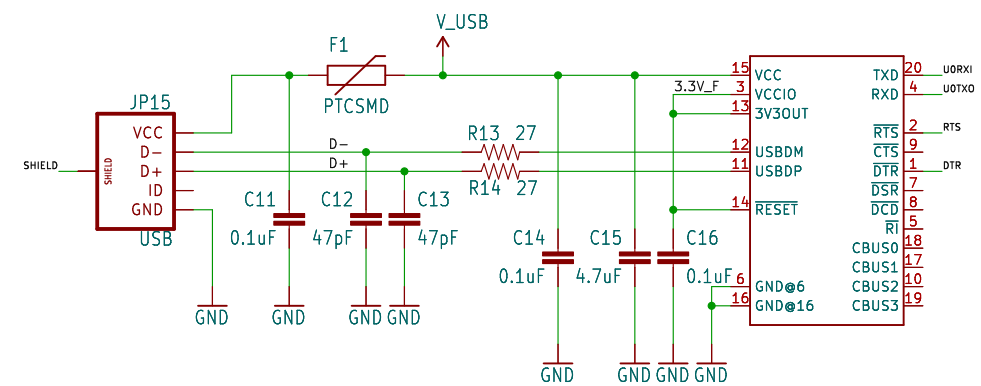


3.3V-1V ADC Scaling

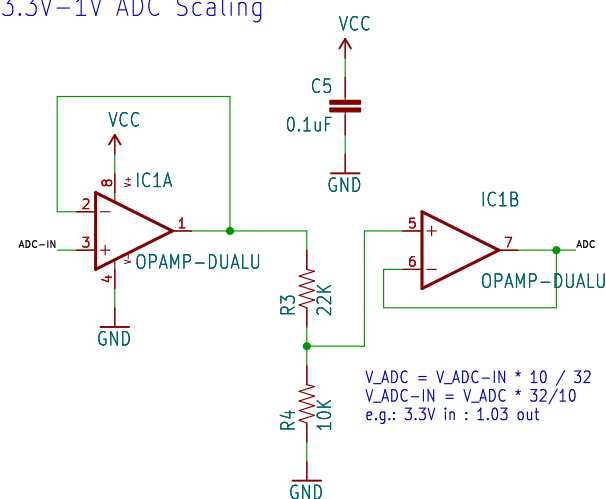

WS2812 LED and Output

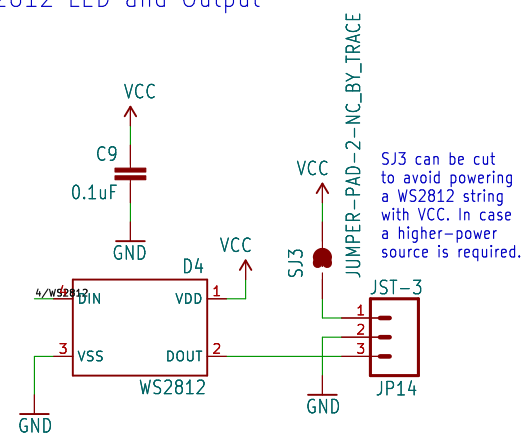


Power LED

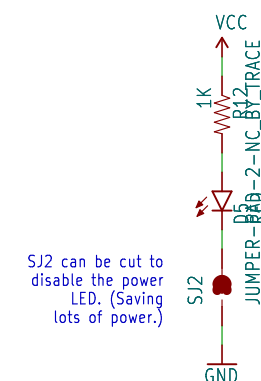


Active-Low Button – GPIO0




Si7021 Temperature and Humidity Sensor & I2C Header

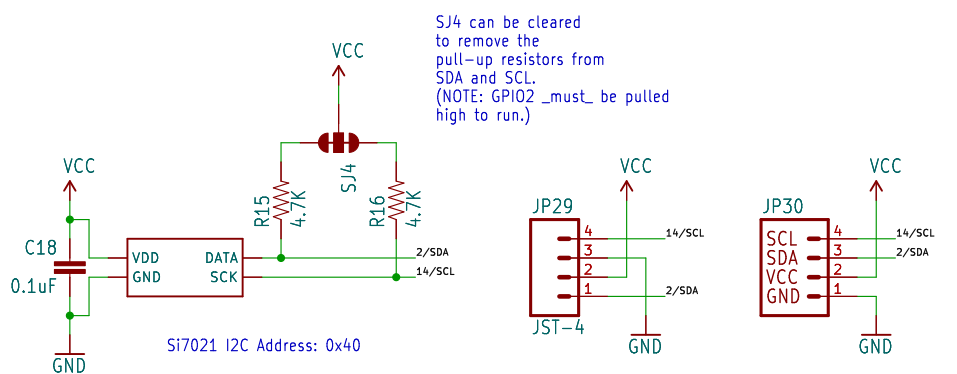



ESP8266EX

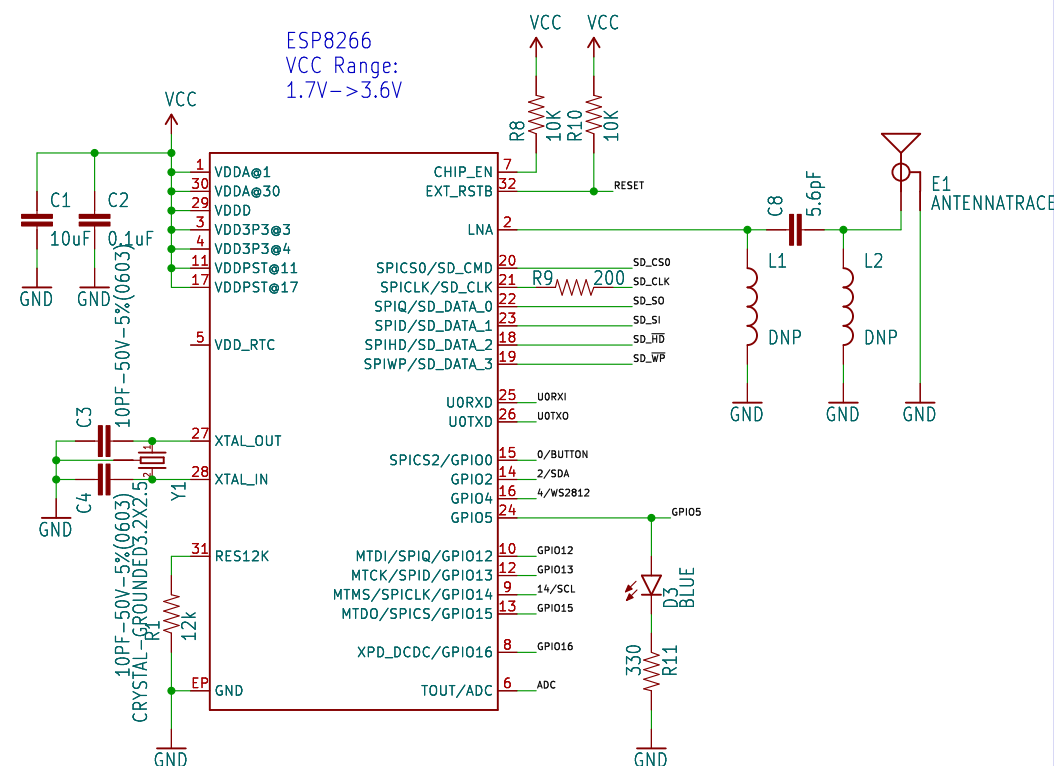


Output Headers

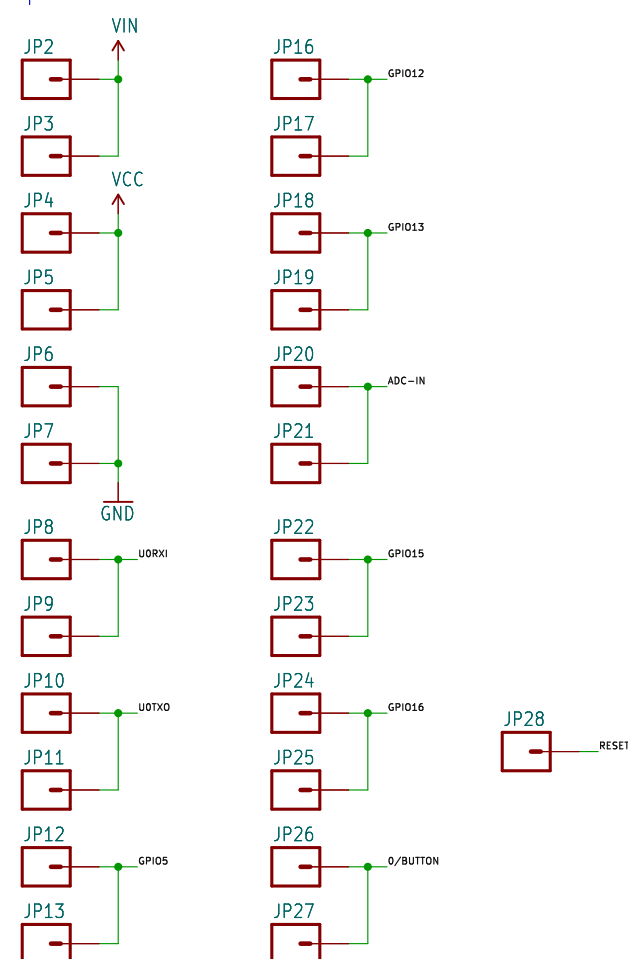


32 Mbit (4MB) Flash

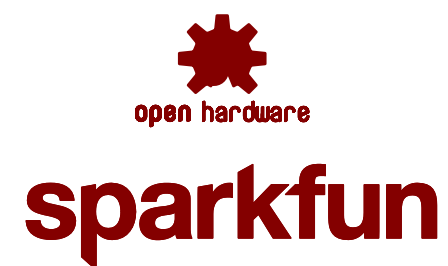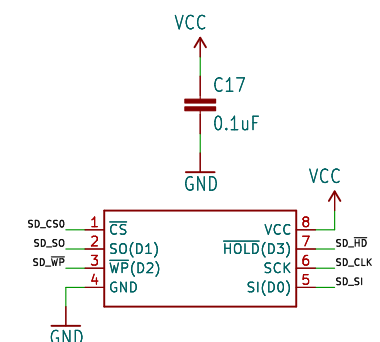

Auto-Reset



Run Default Pull-Ups



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE:	\${PROJECTNAME}
--------	-----------------

Design by: Jim Lindblom
Auto-reset circuit based on NodeMCU Dev Kit

Date:	{CURRENT_DATE}
-------	----------------

Size: User	Date:
KiCad E.D.A.	kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

REV:
v10
$$\{ \} / \$ \{ \# \# \}$$

ev: 1/1