


Note 1: R4 turns clockwise to increase output reference voltage
Note 2: R3 turns counter-clockwise to increase gain
Note 3: Remove C1 for full 80KHz bandwidth

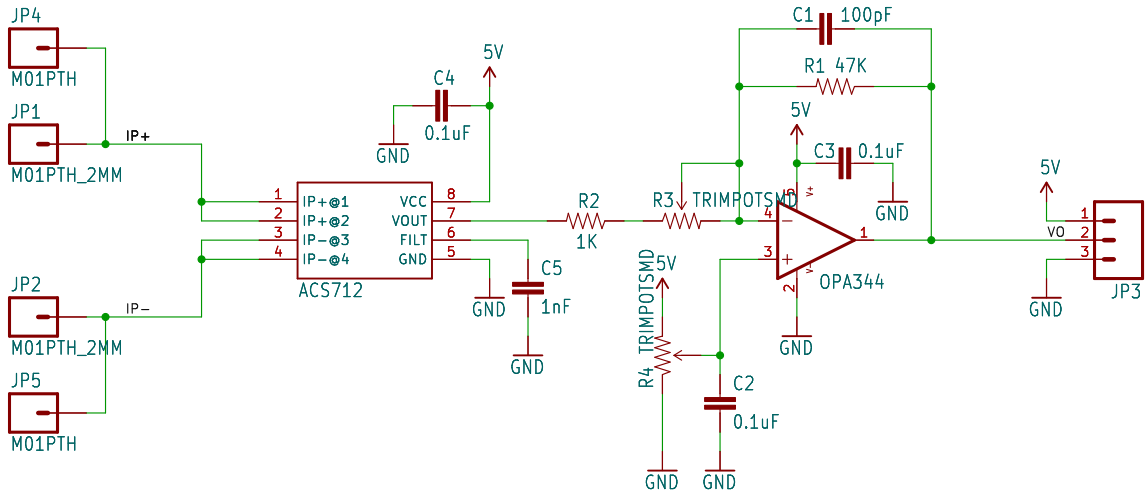

Changes to v13
-Updated library to increase anular rings and use new trimpot package

Changes to v14
-changed via drills to 20 mil to close up mask

TITLE: \${PROJECTNAME}	
Document Number:	REV:
Date: \${CURRENT_DATE}	Sheet: \${#}/\${\$}

SFE	
v14	
Sheet /	
File: /g.kicad_sch	
Title:	
Size: User	Date:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1	
Rev:	
Id: 1/1	