

## LSM6DS3



If downstream SPI devices are hosted by the LSM6DS3, release SCx and SDx from ground by opening SJ3 and SJ4.

SJ1 controls the lowest bit of the I2C address.

Address can be:  
1101011b (0x6B)  
1101010b (0x6A)

JUMPER-PAD-3-20F3\_NC\_BY\_PASTE  
SJ1 3.3V

SERIAL MODES  
MODE1: Slave-only mode  
I2C or SPI  
MODE2: Sensor Hub mode  
I2C or SPI with master I2C port  
MODE3: AUX SPI mode  
I2C and SPI access (Multi-read)

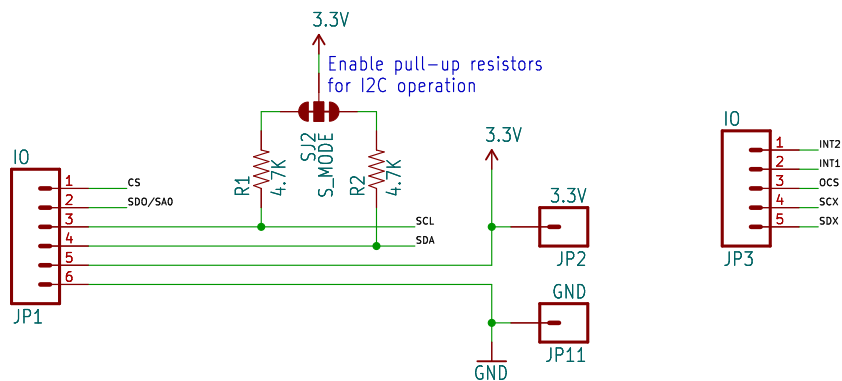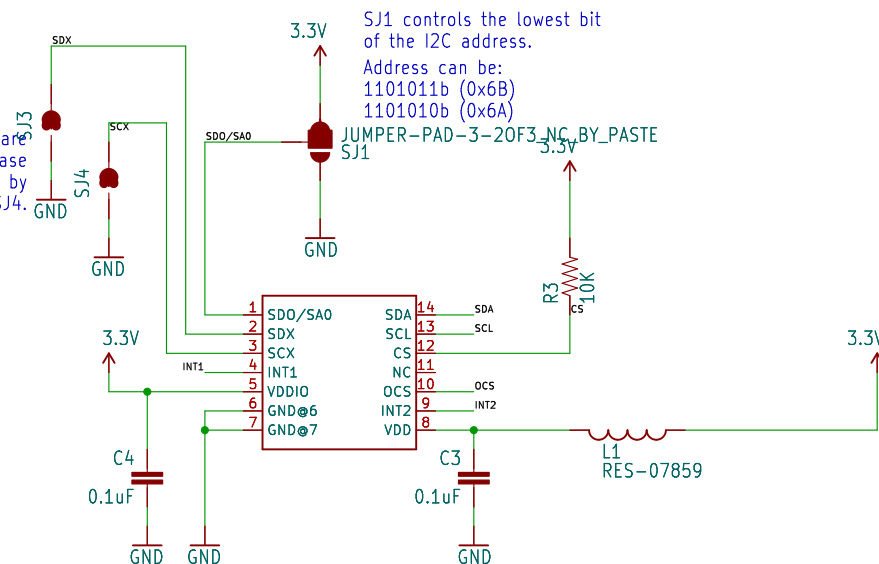

Released under the Creative Commons  
Attribution Share-Alike 4.0 License  
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by:

REV:

|                           |                                             |
|---------------------------|---------------------------------------------|
|                           | Sheet: /                                    |
| Date: $\{CURRENT\_DATE\}$ | File: $\{working\_dir\} \backslash \{sch\}$ |

Sheet: \${#}/\${##}

Size: User

Date:

Rev:

|              |                                     |
|--------------|-------------------------------------|
| KiCad E.D.A. | kiCad-cli 7.0.6-7.0.6~ubuntu22.04.1 |
|--------------|-------------------------------------|

Id: 1/1