




USB-C Firmware Upload

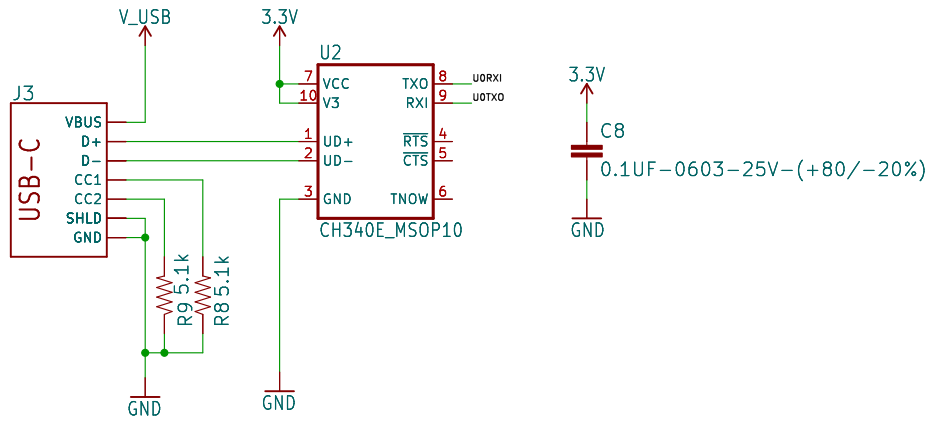

Power: AP2112

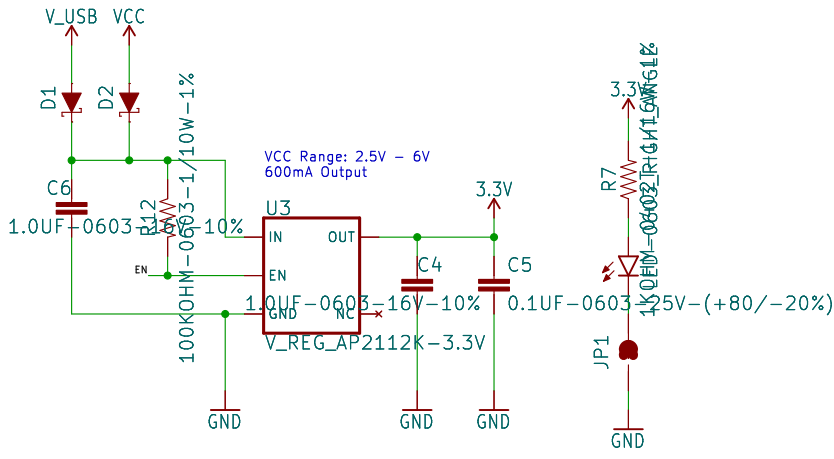


Cut JP1 to disable D3 power LED

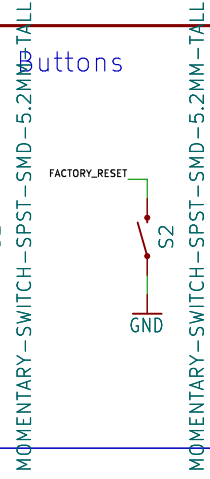


Jumpers

Cut respective jumper to remove I2C data line and/or clock from pullup resistors.





M.2 Connector Edge

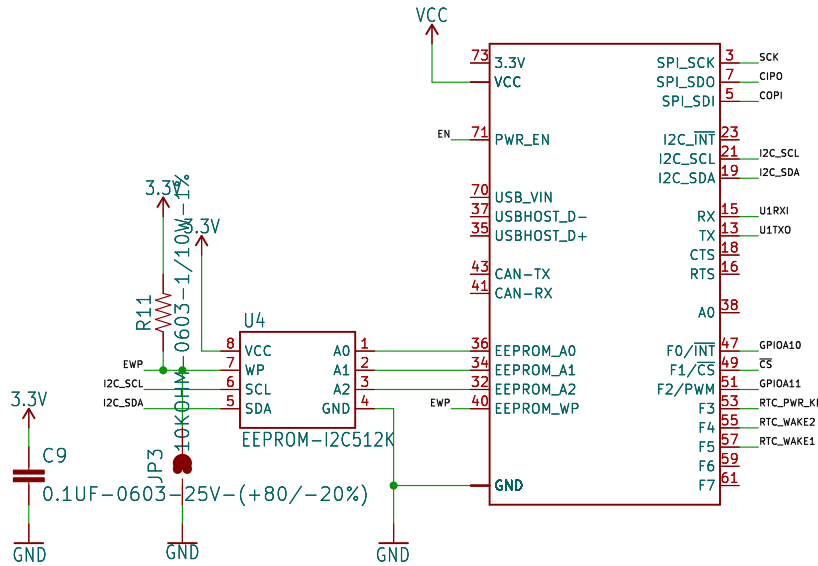

To enable writing to EEPROM, pull WP low, either through the EEPROM_WP pin or closing JP3.

DA16200 Module

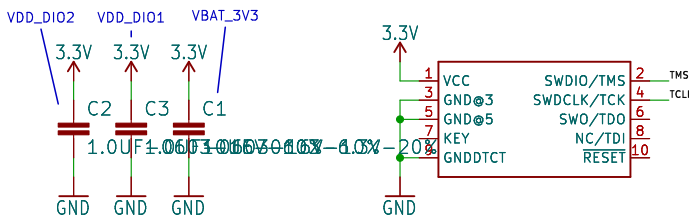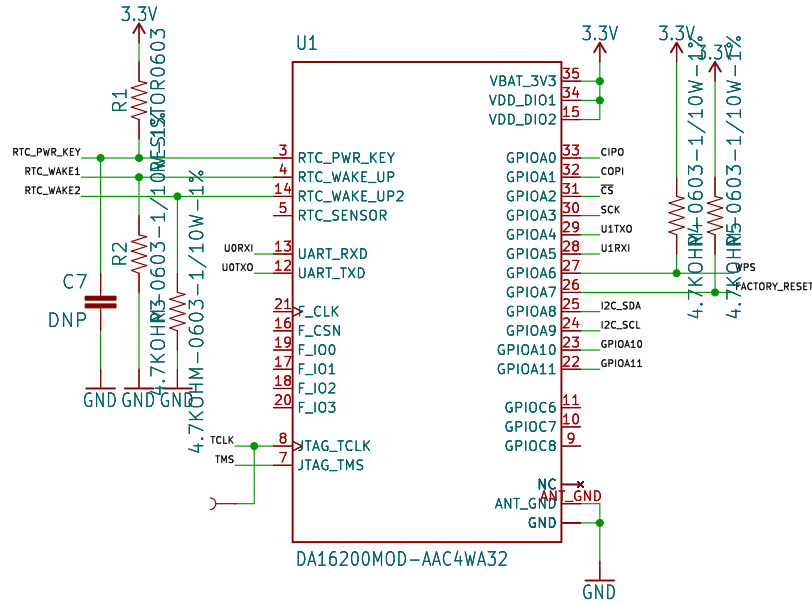

Special Instructions

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Alex Designer

REV: >REV

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev: 1/1