



Header

VIN: 2.4 – 5.5V



Audio Amplifier

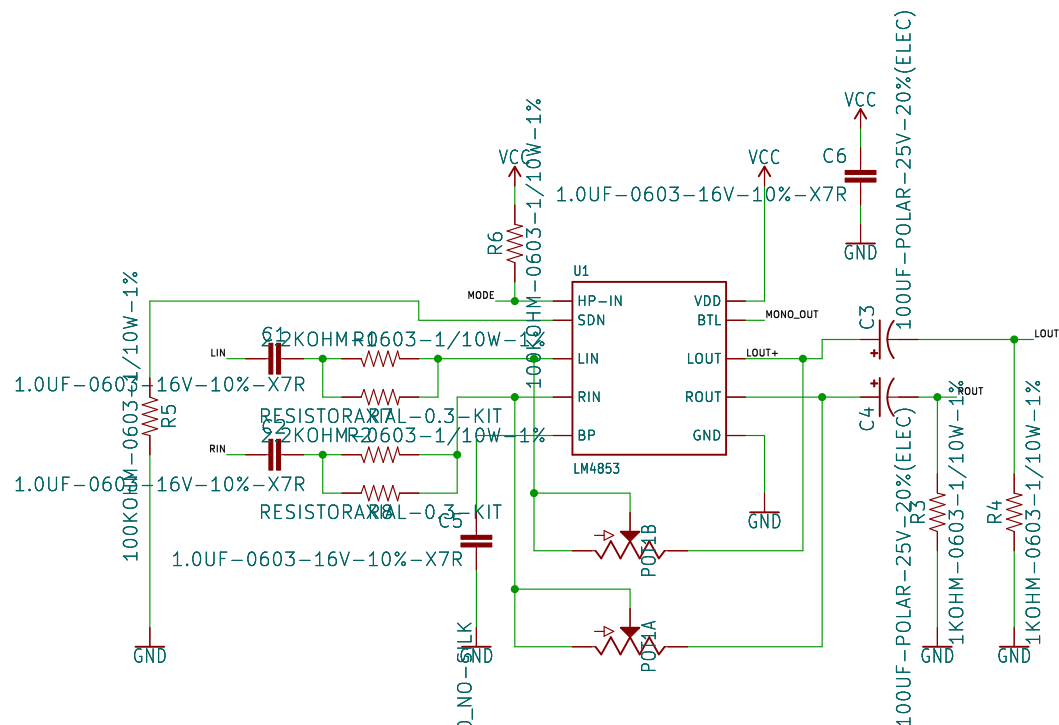

Pot Switch



Switch Current: 3A MAX

Jumper

JP1 Note:
 – Open (Default): Stereo Output
 (Outputs: Left, Right, GND)
 – Closed: Mono Output
 (Outputs: Left, Mono)
 In mono mode, connect speaker
 to Left and Mono, NOT ground



JP2 Note:
 – Jumper should be open when in stereo operation.
 – In mono operation, JP2 can be either opened or closed.
 – When closed, JP2 shorts C3, which will allow lower frequencies to pass more easily.



sparkfun



Released under the Creative Commons
 Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: Alex Wende

REV:
v10

Sheet: /
 Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
 KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev:
Id: 1/1