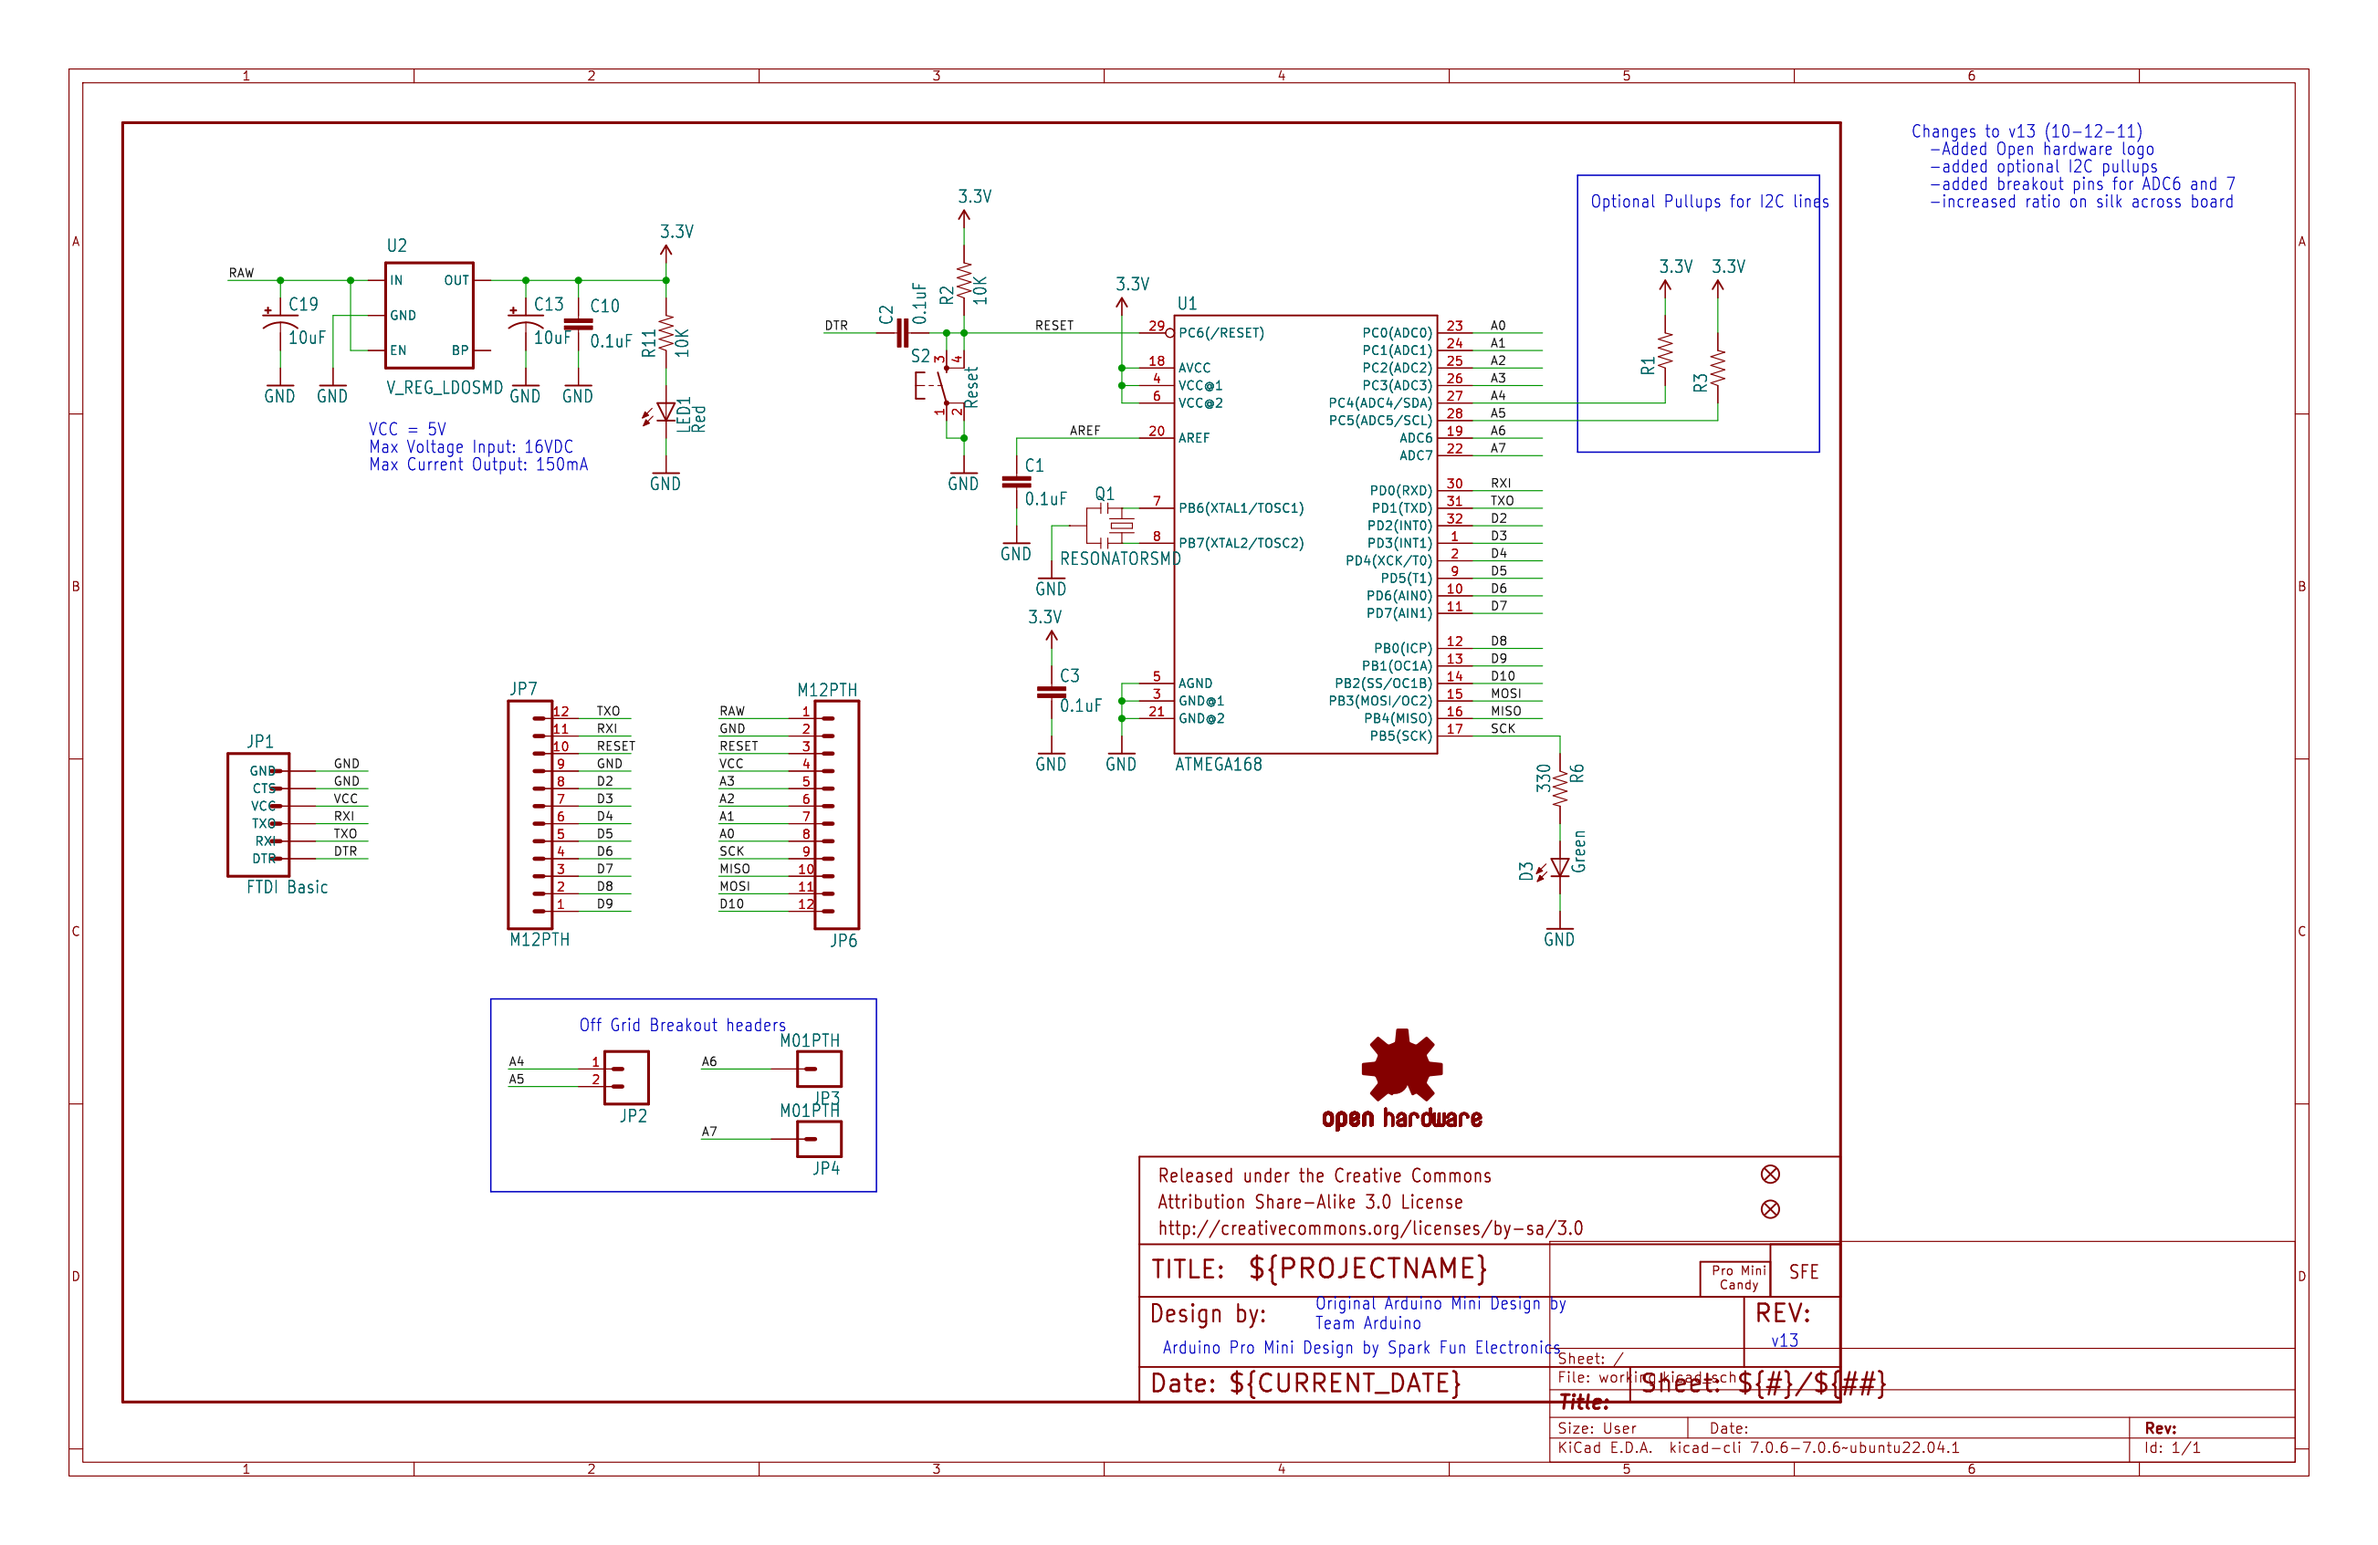
Changes to v13 (10-12-11)
-Added Open hardware logo
-added optional I2C pullups
-added breakout pins for ADC6 and 7
-increased ratio on silk across board
U2
RAW
IN
OUT
GND
EN
BP
V_REG_LDOSMD
C19
10uF
C13
10uF
C10
0.1uF
3.3V
R11
10K
LED1
Red
VCC = 5V
Max Voltage Input: 16VDC
Max Current Output: 150mA
3.3V
R2
10K
DTR
C2
0.1uF
RESET
S2
Reset
U1
PC6(/RESET)
AVCC
VCC@1
VCC@2
AREF
PB6(XTAL1/TOSC1)
PB7(XTAL2/TOSC2)
AGND
GND@1
GND@2
ATMEGA168
PC0(ADC0)
PC1(ADC1)
PC2(ADC2)
PC3(ADC3)
PC4(ADC4/SDA)
PC5(ADC5/SCL)
ADC6
ADC7
PD0(RXD)
PD1(TXD)
PD2(INT0)
PD3(INT1)
PD4(XCK/T0)
PD5(T1)
PD6(AIN0)
PD7(AIN1)
PB0(ICP)
PB1(OC1A)
PB2(SS/OC1B)
PB3(MOSI/OC2)
PB4(MISO)
PB5(SCK)
C1
0.1uF
Q1
RESONATORSMD
C3
0.1uF
Optional Pullups for I2C lines
R1
R3
330
R6
D3
Green
JP1
FTDI Basic
JP7
M12PTH
JP6
Off Grid Breakout headers
JP2
JP3
JP4
M01PTH
open hardware
Released under the Creative Commons
Attribution Share-Alike 3.0 License
http://creativecommons.org/licenses/by-sa/3.0
TITLE: ${PROJECTNAME}
Pro Mini Candy
SFE
Design by:
Original Arduino Mini Design by Team Arduino
Arduino Pro Mini Design by Spark Fun Electronics
REV:
v13
Date: ${CURRENT_DATE}
Sheet: /
File: working.kicad_sch
Sheet: ${#}/${##}
Title:
Size: User
Date:
Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Id: 1/1